

Almost
every woodworker
has the skills to build the
most comfortable chair
in the house.



Morris

CHAIR

I don't care what they say about dogs, Morris chairs are a man's best friend. The reclining back, wide arms and expansive seat create the perfect place to watch TV, read the Sunday paper or simply contemplate the finer qualities of a well-crafted beer.

For the last 10 years, I've spent every weekend planted in the original version of this chair, which was built by the Shop of the Crafters in Cincinnati, Ohio, during the heyday of the Arts & Crafts movement. The Shop of the Crafters was founded by German-American businessman Oscar Onken (1858-1948), who ran a successful framing company until he entered the furniture business in 1902, according to Kenneth R. Trapp's history of the company.

Unlike many furniture-makers of the day, Onken didn't want to merely copy the Stickleys of the world. Onken produced an unusual line of Arts & Crafts furniture that was influenced more by German and Hungarian designs than the straight-lined Stickley pieces of the day. In all honesty, a few of Onken's pieces were kind of ugly. Most, however, had a refinement and lightness that rivaled some of the best work of the day.

This Morris chair is an almost exact replica of the one produced by

by Christopher Schwarz

Photo by Al Parrish





CLIMB-CUTTING TENONS

I own a commercial tenoning jig for my table saw, but I rarely use it. I get better and faster results by cutting tenons using a dado stack and a trick that Contributing Editor Troy Sexton showed me. To avoid tearout on my tenons' shoulders, I "climb cut" the last $\frac{1}{8}$ " or so of the tenon shoulder. You've probably heard of people climb cutting when using a router. Essentially, it's moving the router in the opposite way you normally would to avoid tearout in tricky grain.

That's exactly what you do on your table saw. The final cut on your shoulders is made by pulling the work toward you over the blade and only taking a small cut of material. It sounds awkward, but after a few tenons you get used to it. The risk of kickback is minimal because there's no wood trapped between the blade and the fence. To do this safely, hold your work steady and don't get into a hurry.

Here's how you do it: First install a dado stack into your table saw and set the fence for the finished length of your tenon (almost all of the tenons in this project are $\frac{3}{4}$ " long). Set the height of your dado stack to the amount you want to thin one side of your tenon (for most of the tenons in this project, that would be $\frac{3}{16}$ "). Then, using your miter gauge, push the work through the dado stack to cut the majority of your tenon.

When this cut is done, slide the work against the fence and pull the miter gauge back toward you to shave the shoulder of the tenon. Flip the work over and do the other side. Then do the edges.



Set your fence so the dado stack will make a $\frac{3}{4}$ " cut (the length of your tenon). Hold the piece about $\frac{1}{8}$ " from the fence. Push your work through the blade using your miter gauge.



After you finish that first pass, slide the work against the fence and pull it back toward you over the blade to shave the last little bit of the shoulder.



Repeat the same procedure for the edges of the tenon. (If you like a little more shoulder on your edges, increase the height of the blade.) First push the work forward.



Then slide it against the fence and pull it back toward you to make the final shoulder cut.

Onken and his company. It differs in only two ways. One, the original chair was constructed using dowels at the major joints. After almost 100 years of use, the front and back rail came loose. This chair is built using pegged mortise-and-tenon joints. Second, I made one change to the chair frame so that furniture historians of the future will know instantly that this not an original piece. I did this to prevent people from passing off these reproductions as originals.

Though this project might look daunting to you, it can be completed by beginners who have just a few projects under their belt. There are only a few principles to learn here: mortising, tenoning and routing with a plywood template. Plus, I'll share with you exactly how I achieved this finish, which has been something we've been working at for several years.

How to Save Money on Lumber

Begin by choosing the right quartersawn white oak for this project. It requires about 10 board feet of $\frac{5}{4}$ and 30 board feet of $\frac{4}{4}$ lumber. Quartered white oak can be ex-




Make the mortises in the legs before you shape the curve near the bottom or make cutouts on the top.


pensive, from \$6 to \$12 a board foot. If you live in the Midwest, or will pass near east-central Indiana on your vacation, I recommend you check out Frank Miller Lumber Co. in Union City, Ind. (765-964-7705). The company is a huge supplier of quartersawn oak. As a result, prices are reasonable, about \$4 to \$6 a board foot. Once you buy your lumber, save the pieces with the most ray flake for the arms, legs, front and sides. To save money, use flat-sawn oak for the seat and the adjustable back.

Mortises: Machine or No Machine?


First cut all your pieces to size according to the Schedule of Materials and begin lay-

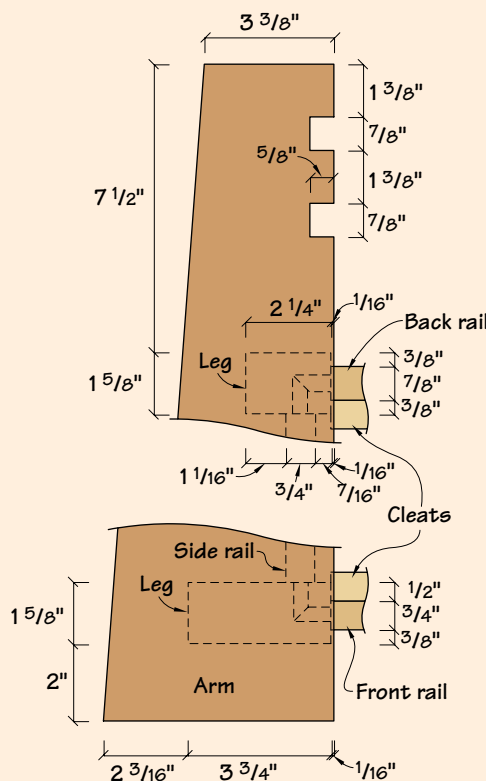

Rail Locations




Cleat Location, Back Rail



Cleat Location, Front Rail

The "X" on the rails and cleats denotes a cross section rather than an end view.

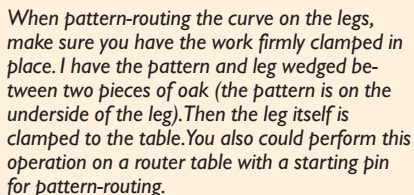


ing out the locations of your mortises. The rule of thumb is that your mortises should be one half the thickness of your tenon's stock. When your stock is $\frac{3}{4}$ " thick, your mortises and tenons should be $\frac{3}{8}$ " thick. That means the tenons for the beefy back rail should be thicker ($\frac{7}{16}$ ") and those for the side slats should be thinner ($\frac{1}{4}$ ").

Also remember that except for the tenons on the legs and slats, all the tenons are $\frac{3}{4}$ " long. To ensure your tenons don't bottom out in your mortises, it's always a good idea to make your mortises about $\frac{1}{16}$ " deeper than your tenons are long.

After you mark the locations of all the mortises, it's time cut them. There are 38 mortises in this project. You'd be nuts to do these all by hand. Use this project as an ex-



Elevation



make cuts in the front edge of the board to check your template against the tenon

SCHEDULE OF MATERIALS: MORRIS CHAIR

Chair frame

No.	Item	Dimensions T W L	Comments
2	Front legs	1 5/8" x 3 3/4" x 21"	1/2" TOE
2	Back legs	1 5/8" x 2 1/4" x 21"	1/2" TOE
2	Applied sides	1 5/8" x 1 3/16" x 4"	
1	Front rail	3/4" x 4 3/4" x 22"	3/4" TBE
2	Side rails	3/4" x 4 3/4" x 24"	3/4" TBE
1	Back rail	7/8" x 4 3/4" x 22"	3/4" TBE
2	Side slats	1/2" x 7 7/8" x 11 3/8"	1/2" TBE
2	Arm bldps	7/8" x 6" x 4 1/2"	
2	Arms	3/4" x 6" x 35 1/4"	
2	Cleats	3/4" x 1 7/8" x 20 1/2"	
1	Back rod	3/4" x 2" x 23 5/16"	

Drop-in seat

No.	Item	Dimensions T W L	Comments
2	Seat stiles	$\frac{3}{4}" \times 2\frac{1}{2}" \times 23\frac{1}{2}"$	
5	Seat rails	$\frac{3}{4}" \times 2\frac{1}{2}" \times 17"$	$\frac{3}{4}"$ TBE

Adjustable back

No.	Item	Dimensions T W L	Comments
2	Back stiles	3/4" x 1 7/8" x 28 1/4"	
5	Back rails	3/4" x 1 7/8" x 17 1/2"	3/4" TBE
1	Bot rail	3/4" x 3 1/4" x 17 1/2"	3/4" TBE

TOE = tenon on one end • TBE = tenon on both ends

cuse to purchase a hollow chisel mortising machine (about \$250) or a mortising attachment for your drill press (about \$70). If you can't swing the cash, I'd make plywood templates and cut the mortises with a router and a pattern bit. Making plywood templates is something covered later in the story.

One more thing: don't cut the mortises in the arms or the arm buildups until the chair frame is assembled. You'll cut these with a router and a pattern bit after the chair frame is assembled.

Tenons With a Dado Stack

Once you get your mortises cut, make tenons that fit snugly into the mortises. You can use a tenoning jig or the fence on your table saw, or you can use a router. I prefer to use a dado stack and my miter gauge. See the story on the previous page for details on how to do this.

While your dado stack is in your saw, cut



Be sure to make a full-size mock-up of the legs and sides (left) to determine the angle you need to cut on the bottom of the legs. When you determine that angle, use a grease pencil or magic marker to paint the bottom of the legs. I cut the back and front legs simultaneously. Slowly inch your legs in after each cut until the color is all gone (below).



the groove in the back piece that holds the seat frame. See the drawing for the location of this groove.

Once you cut your tenons, prepare to assemble the drop-in seat and the adjustable back. To save yourself some grief, sand the edges of the rails that you won't be able to get to after the frames are assembled. Now put glue in all the mortises and clamp up the frames. Set them aside to dry.

Curves and Cutouts

What makes this Morris chair stand out are the curves and cutouts on the legs, arms and slats. Each curve and cutout needs a slightly different strategy.

The large curves on the legs and the small curves on the side slats were cut using a plywood template and a pattern-cutting bit in a router. I made the patterns from $\frac{1}{2}$ "-thick Baltic birch plywood. Use the drawings to make your own plywood template using a scroll saw, band saw or coping saw. Smooth all your cuts with sandpaper, then try shaping a couple scraps with your template to make sure your pattern produces the right shape. When satisfied, cut the curves to rough shape on your band saw (about $\frac{1}{16}$ " shy of your finished line) and clean up the cut with a router and pattern bit. Finish shaping the legs with a chisel.

To produce the large cutouts on the front legs, do what Oscar Onken did: cheat a bit. Make the "cutouts" using a dado stack on your table saw, with the legs on edge. Then glue the applied sides to the legs to cover the open end of the cuts. Instant cutout. While you're at it, cut out the notches on the arm pieces for the rod that adjusts the back.

To complete the legs, you need to cut the bottom of all four legs at a 2-degree angle so the chair sits flat on the floor. I recommend you make a full-sized mock up (see the photo above) so you can get the angle exactly right. Cut the angle on a chop saw.

Assembly

Now you're almost ready to assemble the chair frame. You'll need to first miter the tenons slightly where they meet to fit in the mortises using your table saw. Now finish sand everything. I went to 150 grit using my random-orbit sander and hand sanded the whole piece with 180 grit. Yes, it makes a noticeable difference.


Now glue the front rail between the front legs and the back rail between the back legs. Clamp and allow your glue to dry. Use $\frac{1}{4}$ " dowels to pin the tenons from the inside of the chair. This strengthens the weakest point of this chair. It's at this joint where the original chair came loose.

Glue the side rails between the front and back legs and you can see your chair take shape.

Learn to Make Square Templates


Now you need to work on the arms. First glue the arm buildup pieces to the front of the arms. Then get ready to cut the mortises on the arms that will hold the tenons on the legs and side slats. A word of advice here. Mock up an arm out of scrap wood and practice on it first.

To make plywood templates for the mortises, you need to make a square hole in the middle of a piece of ply. The best way to do this is by making plunge cuts into your ply-

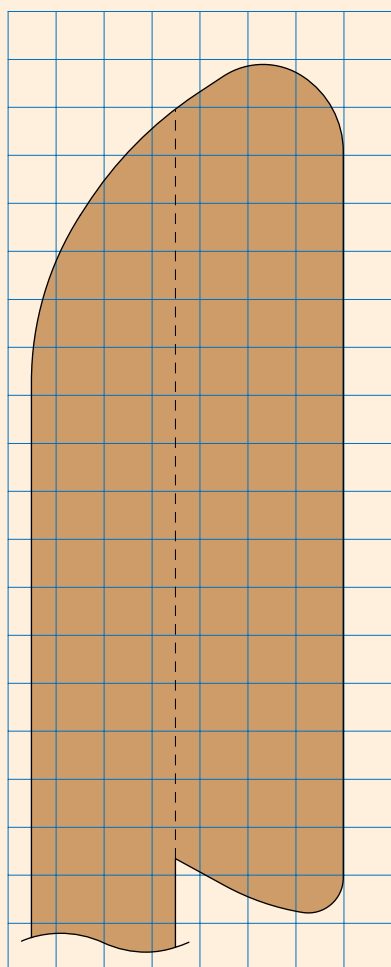

Full-size Diagram of Arm

Plan of Back and Seat

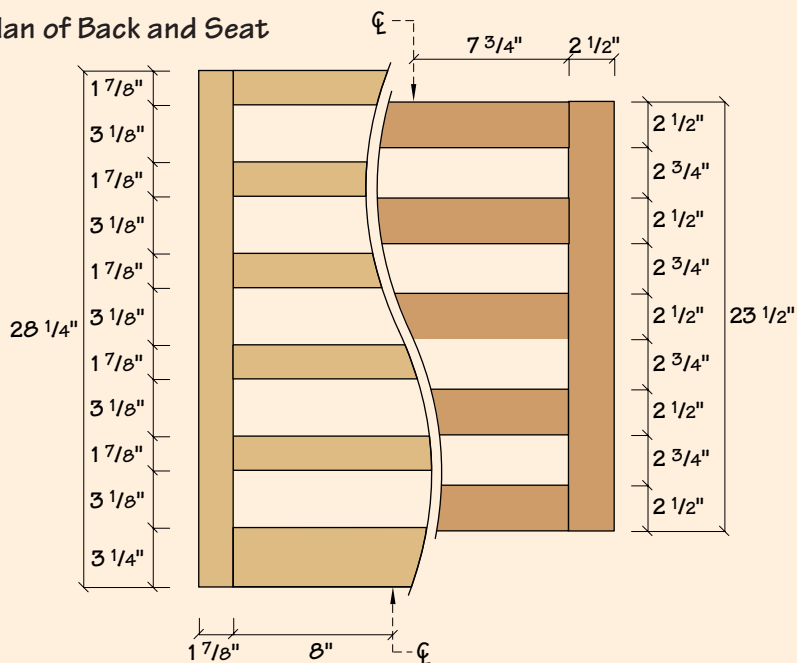

wood on your table saw. Refer to the photo earlier in the story to see how to do this.

Now cut your mortises. I used a template bit with cutters on the bottom and a guide bearing on top. If you don't have a bit with cutters on the bottom, you can still plunge with a straight bit. Just plunge slowly and wiggle the router a bit as you go. Cut the mortises in two passes.

After you're sure the arms fit on the legs, cut the curve on the front of the arm. Attach the full-size pattern to your arm and cut the shape on a band saw. Clean up the cuts with a stationary belt sander. Now taper the arms with your band saw


Be sure to make a test arm before you go mortising the real thing. You'll be glad you did.

and clean up the cut with your jointer. Glue the arms and slats in place.

Now shape the back rod that adjusts the seat back angle. Bevel one edge of the rod on your jointer and cut notches on the ends so the rod fits between the arms. Attach the back to the seat frame with a piano hinge. Screw the cleats to the front and back of the frame in the locations shown in the diagram; slip the seat in place.

Finishing

This takes some effort, but it is well worth it. The first step is to dye the chair with an alcohol-based aniline dye that's reddish. See the supplies list for ordering information. Then apply one coat of boiled linseed

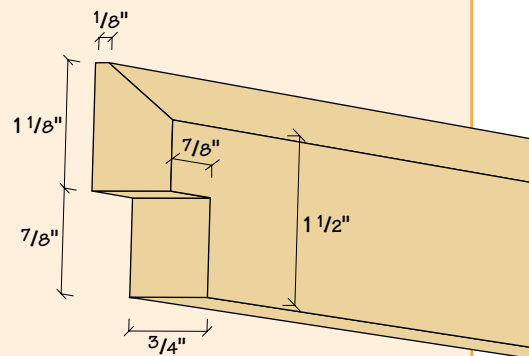

Back Rod




Peg the tenons that join the front rail to the front legs and the back rail to the back legs. If you've ever pegged tenons before, you know that dowels can be wildly different sizes than they're supposed to be. Here's a trick. If your dowel is a bit undersized, glue it in place and cut it nearly flush to the surface. Then put several drops of thinned glue on the end grain of the dowel. It wicks in the glue, expands and glues up tight. When the glue is dry, cut the dowel flush.

oil to the chair. You can get this at any home center store. Wipe off the excess and let it dry overnight. The linseed oil helps seal the wood before your final coloring step and helps bring out the ray flake.

Now wipe on a thin coat of Lilly's warm brown glaze. We live and die by this stuff when finishing Arts & Crafts furniture. We're not aware of a catalog that sells it, but you can visit Lilly's website (at the address in the supplies box) to find a paint store that carries this glaze. Wipe the glaze until you achieve an even tone. Allow it to dry overnight. Finally, apply three coats of a clear finish — whatever you're comfortable with.

Editor's note: Plans for the Stickley side table shown in the opening photo can be found on the following page. Also, did you ever wonder what happens to projects built by the *Popular Woodworking* staff? Recently we've begun selling some completed projects on ebay.com, an internet auction site. The Morris Chair featured on the cover and the Stickley Table will go up for sale on May 1, 2000. Check out the auction at www.ebay.com

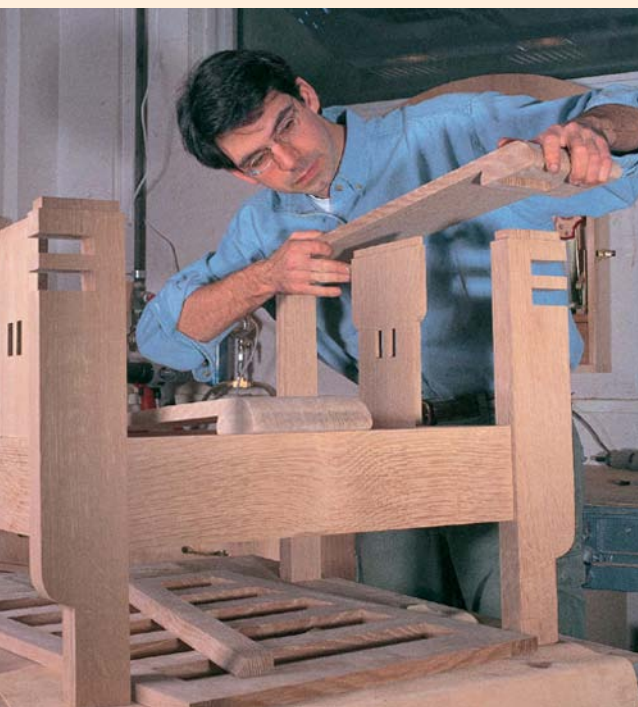

SUPPLIES

Slotted Piano Hinge
Rockler Woodworking
and Hardware: 800-
279-4441 or www.rockler.com
Item # 19241 • \$6.99

Moser's Aniline Dye
Woodworker's Supply:
800-645-9292
Medium red mahogany,
alcohol soluble • item#
A16701 • \$8.80

Warm Brown Glaze
Made by Lilly Industries
(formerly Guardsman).
For a list of distributors
of Lilly wood products,
visit the company's
website at:
<http://www.lillyindustries.com/en/sbu/wood/wooddist.htm>

Stickley

SIDE TABLE

Not ready to build
the Morris chair?

Try your hand at this side
table to hone your skills.

by David Thiel

Patterned after the model #562 taboret shown in the L.&J.G. Stickley catalog of 1914, the original of this table now sells for \$1,600 at auction.

As with all white oak Arts & Crafts pieces, wood figure is important to make a simple design stand out. Choose the best figure for the top and the panel pieces. If the stretchers and legs are also well-figured, so much the better.

After cutting the legs to size, mark the best faces for showing off the grain. Then cut $\frac{3}{8}$ " x $2\frac{5}{8}$ " x 1"-deep mortises in the legs for the stretchers, and $\frac{3}{8}$ " x $1\frac{1}{8}$ " x 1"-deep mortises for the aprons. These mortises are centered on the width of the legs and located as shown in the diagram. I used a benchtop mortiser for this step, but you could also use a plunge router with an up-spiral bit to cut them.

Now change the bit (either mortiser or router bit) to a $\frac{1}{4}$ " bit and mark and cut the $\frac{1}{4}$ " x $5\frac{3}{8}$ " x $\frac{1}{2}$ "-deep mortises for the panels in the aprons and stretchers.

With the mortises complete, head for the table saw and get ready to cut tenons. I use a rip blade to form my tenons. I cut the cheeks first, then define the shoulders, so there isn't a chance of the shoulders being accidentally notched by the saw blade during the cheek cut. By cutting the shoulder last, any "notching" will happen against the tenon cheek.

When making the shoulder cut on the table saw, it's easiest to use the rip fence

to define the 1"-tenon length. If you use the fence to the right of the blade, and the miter gauge to the left of the blade you will trap the fall-off piece between the blade and fence, causing it to shoot back from the blade. Instead, set the fence for 13" to the right of the blade and use the miter gauge to the right of the blade as well. This way you can cut both tenoned ends with a single setup, and the waste will fall harmlessly to the left of the blade.

If you're paying careful attention, you will realize 1" tenons are going to bump into one another in the mortises. After cutting the tenon shoulders, reset the fence and the blade angle to cut 45-degree miters

on the ends of the tenons.

Don't leave the saw yet. You still need to form the $\frac{1}{4}$ " x $5\frac{1}{4}$ " x $\frac{1}{2}$ " tenons on both ends of the panels. You might have noticed that the tenons are $\frac{1}{8}$ " less wide than the mortise dimensions. This is no mistake. When the side panels are positioned between the stretchers and aprons, the shoulders of the panel tenons will fit snug against the stretchers and rails. If the mortises in the legs were the exact width of the tenons, and off by even a little bit, they would force a gap between the panels and the two rails. The $\frac{1}{8}$ " extra space on the panel tenons is to allow for wood movement.

Next, mark the 1" curve on the bot-





The best method for mortising is to first bore the areas at either end of the mortise, then space the next few mortises the width of the mortising chisel. In this case, the spacing works almost perfectly. The goal is to allow the chisel bit to have enough wood to drill straight without wandering from side-to-side. On some mortises the spacing between the first holes will be less than the width of the chisel (**far left**).

Complete the mortise by drilling away the waste between the first mortises. This allows the mortise chisel to cut most efficiently without pulling to the left or right and bending the chisel (**left**).

tom edge of each stretcher and cut the shape on the band saw. The easiest way to mark this curve is with a flexible $\frac{1}{8}$ " wood strip bent to the 1" mark and then traced with a pencil.

One last step before assembly. The top is held in place by table top fasteners. These are screwed into the underside of the top, and fit into $\frac{1}{8}$ "-wide grooves in the aprons. These fasteners allow the top to adjust to wood movement without affecting the base. Run these grooves on all four aprons on the table saw. This will let you decide which way the top will fit later.

You're ready to sand, then glue up the

base. A dry fit is definitely a good idea to make sure everything fits and to make sure you know how to hold everything in place once the glue goes on.



With the base glued and clamped, cut the pieces for the top, and glue them together. To reduce the amount of sanding necessary, a few biscuits added to the joint will help align the pieces and keep them from slipping during glue-up.

When the base is ready, mark each of the peg locations on the mortise and tenon joints, and drill a $1\frac{1}{4}$ " x $\frac{1}{4}$ " hole at each location. Then peg the holes with $\frac{1}{4}$ " oak dowels. Cut the excess dowel length flush

to the table leg and finish sand.

Unclamp the top and sand it flat. Then mark $2\frac{1}{2}$ " in from each corner and run a line at a 45-degree angle to clip the corners of the top on the band saw to an octagon shape. Then finish sand the top.

I used the same finish on the table that was used on the chair. If you've built the chair as well, put a nice lamp on the table, get a good book, and sit down to some early 20th century comfort.

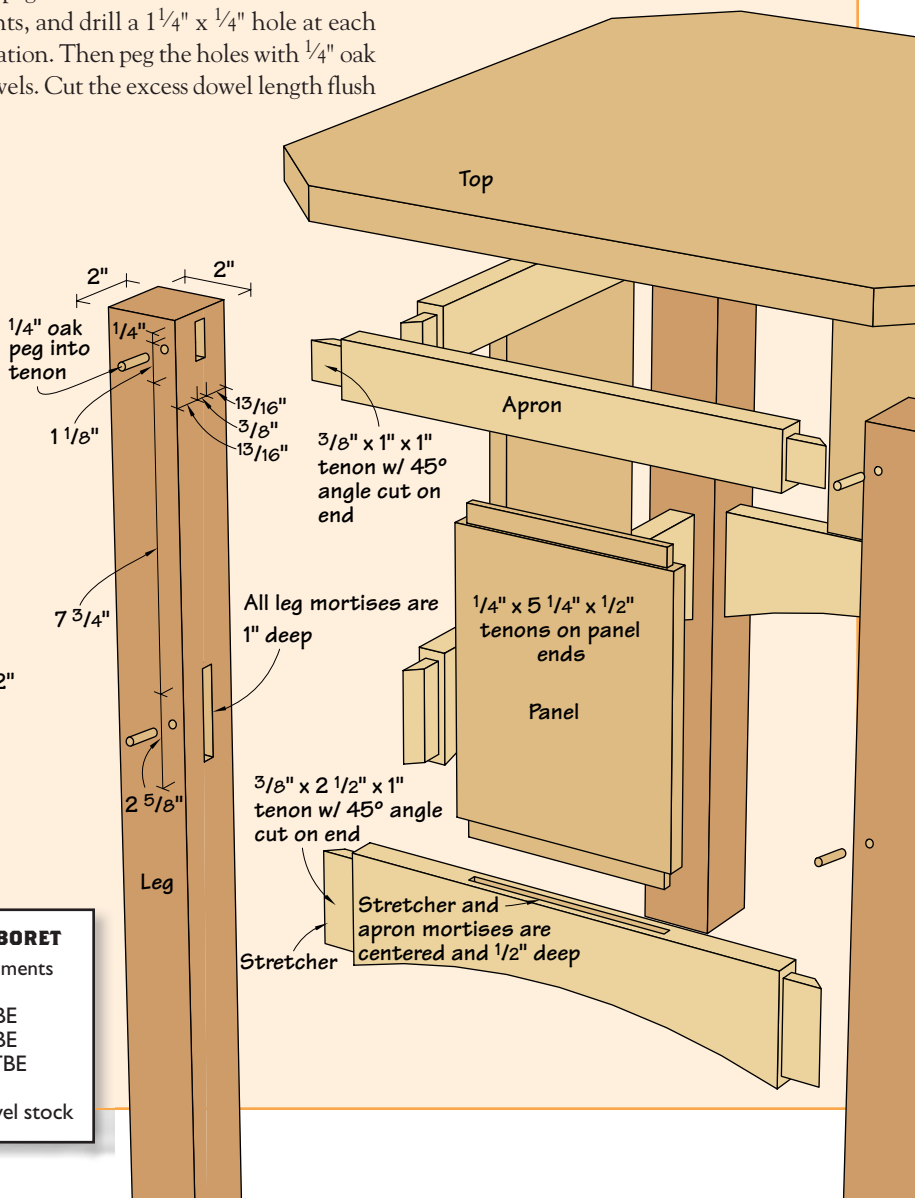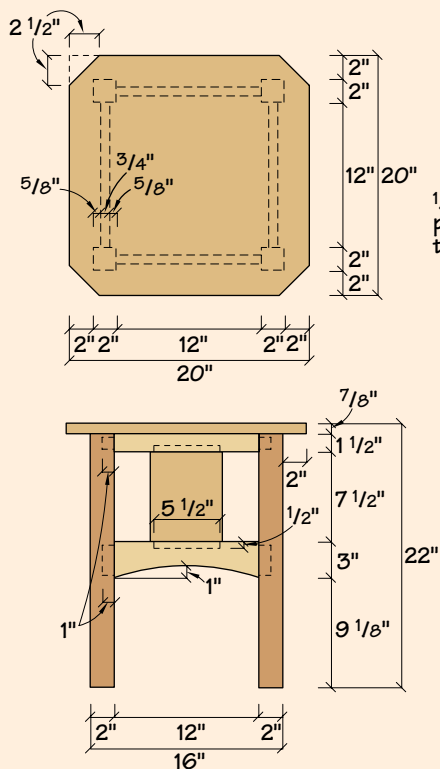

SCHEDULE OF MATERIALS: ARTS & CRAFTS TABORET

No.	Item	Dimensions T W L	Material	Comments
4	Legs	2" x 2" x 21 7/8"	WO	
4	Stretchers	7/8" x 3" x 14"	WO	1" TBE
4	Aprons	7/8" x 1 1/2" x 14"	WO	1" TBE
4	Panels	1/2" x 6" x 8 1/2"	WO	1/2" TBE
1	Top	7/8" x 20" x 20"	WO	
16	Pegs	1/4" x 1 1/2"	Oak	Dowel stock