

No.304

THE MAGAZINE FOR HOBBY ENGINEERS, MAKERS AND MODELLERS

MODEL ENGINEERS' WORKSHOP

Join the conversation at: www.model-engineer.co.uk

JUNE 2021

INSIDE

- Bandsaw Blade Repair Jig
 - Backstop for a Myford Lathe
 - Mini-Lathe Spindle Extension
 - Shaping a Keyway
 - Cutting Fluids
 - Introducing Drilling Machines
- And much more!**



Screwcutting Clutch for the Emco Maximat



Grinding D-Bits for Injectors

COVER STORY

Easy Toolholders for Benchtop CNC Mills

GET MORE OUT OF YOUR WORKSHOP WITH MEW



PRO MACHINE TOOLS LIMITED

Tel: 01780 740956
Int: +44 1780 740956

Up to **5 year warranty** on selected WABECO Machines!



Precision machines made in Germany for the discerning engineer!



Wabeco CNC Lathe CC-D6000

- Centre Distance - 600mm
- Centre Height - 135mm
- Speed - 30 to 2300rpm
- Power - 1.4 KW
- Size - 1215 x 500 x 605mm
- Weight - 150Kg
- NCCAD/
NCCAD Pro

**Wabeco produce quality
rather than eastern quantity**

CNC machines are offered with a variety
of CNC control and software systems,
and still be used as manual machines.

**Wabeco produce precision
made machines by rigorous quality
control and accuracy testing.**



All lathes and mills are backed by an
extensive range of tools and accessories



Wabeco Mill F1210

- Table - 700 x 180mm
- Z axis - 280 mm
- Speed - 140 to 3000rpm
- Power - 1.4 KW
- Size - 900 x 610 x 960mm
- Weight - 101Kg

Wabeco Lathe D6000

- Centre Distance - 600 mm
- Centre Height - 135mm
- Speed - 30 to 2300rpm
- Power - 1.4 KW
- Size - 1230 x 500 x 470mm
- Weight - 150kg

Wabeco Lathe D4000

- Centre Distance - 350mm
- Centre Height - 100mm
- Speed - 30 to 2300rpm
- Power - 1.4 KW
- Size - 860 x 400 x 380mm
- Weight - 71kg

**5 year
warranty**



Wabeco CNC Mill CC-F1410

- Table - 700 x 180mm
- Z axis - 280 mm
- Speed - 140 to 3000rpm
- Power - 1.4 KW



**5 year
warranty**

EMCO

1885 WABECO 1885

CERIANI

**SWISS
tec**

TECO

**GO!matic
Maschinenbau**

PROXXON

**EMCO
Hobymaschinen**



- Size - 950 x 600 x 950mm
- Weight - 122Kg
- NCCAD/NCCAD Pro

**2 year
warranty**

MORE MACHINES AND ACCESSORIES ON LINE

Our machines suit the discerning hobbyist as well as blue chip industry

We regularly ship worldwide

Please contact us for stock levels and more technical detail

All of our prices can be found on our web site:

www.emcomachinetools.co.uk

PRO Machine Tools Ltd.

17 Station Road Business Park, Barnack,
Stamford, Lincolnshire PE9 3DW

tel: 01780 740956 • int: +44 1780 740956
email: sales@emcomachinetools.co.uk

MODEL ENGINEERS' WORKSHOP

Published by MyTimeMedia Ltd.
Suite 25, Eden House, Enterprise Way,
Edenbridge, Kent TN8 6HF
+44 (0) 203 855 6105
www.model-engineer.co.uk

SUBSCRIPTIONS

UK - New, Renewals & Enquiries
Tel: 0344 243 9023
Email: help@me.secureorder.co.uk
USA & CANADA - New, Renewals & Enquiries
Tel: (001)-866-647-9191
REST OF WORLD - New, Renewals & Enquiries
Tel: +44 1604 828 748
Email: help@me.secureorder.co.uk

CURRENT AND BACK ISSUES

Tel: 01795 662976
Website: www.mags-uk.com

MODEL ENGINEERING PLANS

Contact: www.myhobbystore.co.uk/contact
Website: www.myhobbystore.co.uk/me-plans

EDITORIAL

Editor: Neil Wyatt
Tel: +44 (0)1689 869 912
Email: neil.wyatt@mytimemedia.com

PRODUCTION

Designer: Andrew Tompkins
Illustrator: Grahame Chambers
Retouching: Andrew Tompkins
Ad Production: Andrew Tompkins

ADVERTISING

Business Development Manager: Angela Price
Email: angela.price@mytimemedia.com

MARKETING & SUBSCRIPTIONS

Subscriptions Executive: Beth Ashby-Njiiri
Email: beth.ashby@mytimemedia.com

MANAGEMENT

Group Advertising Manager: Rhona Bolger
Email: rhona.bolger@mytimemedia.com
Tel: 0204 522 8221
Chief Executive: Owen Davies

mytime media
print & digital media publishers

© MyTimeMedia Ltd. 2021
All rights reserved ISSN 0959-6909

The Publisher's written consent must be obtained before any part of this publication may be reproduced in any form whatsoever, including photocopies, and information retrieval systems. All reasonable care is taken in the preparation of the magazine contents, but the publishers cannot be held legally responsible for errors in the contents of this magazine or for any loss however arising from such errors, including loss resulting from negligence of our staff. Reliance placed upon the contents of this magazine is at reader's own risk.

Model Engineers' Workshop, ISSN 0959-6909, is published monthly with an additional issue in August by MYTIMEMEDIA Ltd, Enterprise House, Enterprise Way, Edenbridge, Kent TN8 6HF, UK. The US annual subscription price is 52.95GBP (equivalent to approximately 88USD). Airfreight and mailing in the USA by agent named WN Shipping USA, 156-15, 146th Avenue, 2nd Floor, Jamaica, NY 11434, USA.

Periodicals postage paid at Brooklyn, NY 11256.

US Postmaster: Send address changes to Model Engineers' Workshop, WN Shipping USA, 156-15, 146th Avenue, 2nd Floor, Jamaica, NY 11434, USA. Subscription records are maintained at DSB.net Ltd, 3 Queensbridge, The Lakes, Northampton, NN4 5DT. Air Business Ltd is acting as our mailing agent.



Paper supplied from wood grown in forests managed in a sustainable way.



On the Editor's Bench

His Royal Highness Prince Philip, the Duke of Edinburgh

The sad news that His Royal Highness Prince Philip, the Duke of Edinburgh had passed away reached us too late to mention in the last issue.

We extend our condolences to the Royal Family.

Many readers will be aware that Prince Philip had a lifelong interest in both full-size and model engineering matters, and this was in no way better exemplified by his establishment of the Duke of Edinburgh Trophy. This is the most highly regarded trophy in model engineering, awarded in a competition open only to previous winners of gold or silver medals in the Model Engineer competition.

A British Pathe newsreel of the Duke at the 1952 Model Engineer Exhibition can be found here: model-engineer.co.uk/DOE, the excerpt below is from the October 30 1952 issue of our sister magazine, Model Engineer.

H.R.H. at the "M.E." Exhibition

● AFTER THE opening of the "M.E." Exhibition by the Duke of Edinburgh, and His Royal Highness had toured the show thoroughly, we learnt that he had enjoyed himself immensely and had been profoundly impressed by the quality of craftsmanship revealed in everything that he had examined. His searching gaze seemed to miss nothing of importance, and his rapid fire of questions kept his lucky guides busy for an hour.

It was noticeable that explanations of technical points were largely unnecessary. As he departed from the show, he was graciously generous in his warm-hearted praise. To have had the honour of being with him during his tour of the show was an experience we shall never forget.



H.R.H. the Duke of Edinburgh with Mr. Kenneth E. Gareke, Chairman of Messrs. Percival Marshall and Co., Ltd., examining the model of H.M.S. "Magpie" which was presented to His Royal Highness after the Opening Ceremony

CLOCK CONSTRUCTION & REPAIR

Books by:


John Wilding MBE
FBHI, E. J. Tyler,
John G. Wright, Eric
Woof, John Tyler
and others.

SPRINGS
BEARINGS
FRAMES
DIALS etc.

**FREE
Catalogue**

Telephone: +44 (0) 1420 487747

www.ritetimepublishing.com

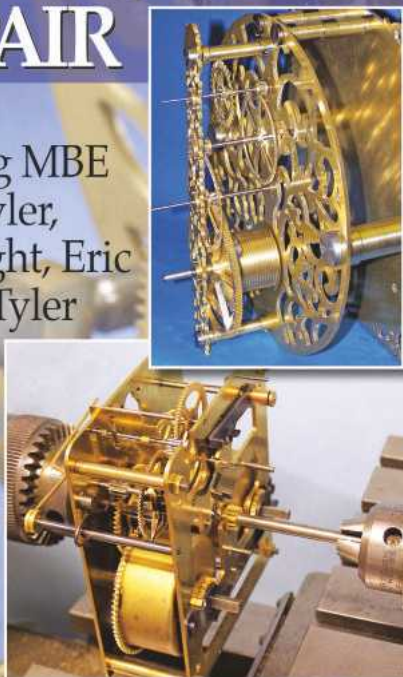

POLLY MODEL ENGINEERING LIMITED



Expanding range of In-house manufactured
components

NEW! Axle pumps

Available in 1/4", 3/8" &
1/2" ram. Prices start
from £45.00



NEW!



NEW! Blowdown

spanner – suitable for
5/16" & 3/8"

£6.50



Brake Valve

For steam or vacuum

£83.00

BR/LMS safety valves



Safety valves



Box Spanners

BA & Metric. Available
individually or in sets
Only £3 each



Tender water valves



GWR injector steam valve



GWR dummy whistles

Catalogue available £2.50 UK posted £8 international and enquire for further details or visit our website where you will find Polly Locos Kits, drawings and castings for scale models and comprehensive ME Supplies.



Polly Model Engineering Limited
Atlas Mills, Birchwood Avenue,
Long Eaton, Nottingham, NG10 3ND

www.pollymodelengineering.co.uk
Tel: 0115 9736700
email: sales@pollymodelengineering.co.uk

Tracy Tools Ltd.
Unit 1, Parkfield Units,
Barton Hill Way,
Torquay TQ2 8JG

 **Tracy Tools Ltd**

Visit our brand new website

We ship anywhere in the world

www.tracytools.com

PRODUCTS

- Taps and Dies
- Centre Drills
- Clearance Bargains
- Diestocks
- Drill sets (HSS) boxed
- Drills
- Drill set (loose) HS
- Endmills
- Lathe Tooling
- Reamers
- Slot Drills
- Specials
- Tailstock Die Holder
- Tap Wrenches
- Thread Chasers

Acme
Taps



Taper Shank Drill
HSS



Reamer



Taps
&
Dies



Tracy Tools Ltd

Tap & Die Specialist, Engineer Tool Supplies

Tel: 01803 328 603
Fax: 01803 328 157
Email: info@tracytools.com
www.tracytools.com

NEW STORE
NORTHAMPTON
OPENS IN MAY!

Clarke

METAL LATHE

- 300mm between centres • LH/RH thread screw cutting • Electronic variable speed
- Gear change set • Self centering 3 jaw chuck & guard • Power feed



£598.00
£717.60 INC. VAT
CL300M

Machine Mart

65 SUPERSTORES NATIONWIDE

Britain's Tools & Machinery Specialist!

NEW 500 PAGE CATALOGUE

GET YOUR FREE COPY! IN-STORE

PHONE
0844 880 1265

ONLINE
www.machinemart.co.uk



Clarke

MILLING DRILLING MACHINE

- Bench mountable, tilts 45° left & right from vertical
- Table travel 100x235mm
- Table Effective Size LxW: 92 x 400mm



£419.00
£502.00 INC. VAT
CMD10



£629.00
£754.00 INC. VAT
CMD300

Clarke

MICRO MILLING & DRILLING MACHINE

- Bench mountable • MT2 Spindle
- Taper • Face mill capacity 20mm, end mill 10mm
- Table cross travel 90mm, longitudinal travel 180mm



£419.00
£502.00 INC. VAT
CMD10

Clarke

TURBO AIR COMPRESSORS

- Superb range ideal for DIY, hobby & semi-professional use



£99.00
£119.00 INC. VAT
8/260

Clarke

BOLTLESS SHELVING/BENCHES

- Simple fast assembly in minutes using only a hammer



£33.00
£40.00 INC. VAT
150 PER SHELF

£350.00
£420.00 INC. VAT
350 PER SHELF

£33.00
£40.00 INC. VAT
150 PER SHELF

£350.00
£420.00 INC. VAT
350 PER SHELF

£33.00
£40.00 INC. VAT
150 PER SHELF

£350.00
£420.00 INC. VAT
350 PER SHELF

£33.00
£40.00 INC. VAT
150 PER SHELF

£350.00
£420.00 INC. VAT
350 PER SHELF

£33.00
£40.00 INC. VAT
150 PER SHELF

Clarke

STATIC PHASE CONVERTERS

- Run big 3 phase woodworking machines from 1 phase supply
- Variable output power to match HP of motor to be run



£249.00
£298.00 INC. VAT
PC60

Clarke

ENGINEERS BENCH VICES

- A range of fixed and swivel vices with top quality cast iron construction



£19.00
£23.00 INC. VAT
CMV140

Clarke

WORKBENCH WITH PEGBOARD

- Easy to assemble, providing valuable working space and plenty of additional storage capacity.



£69.00
£82.00 INC. VAT
CWB-R1B

Clarke

1 TONNE FOLDING WORKSHOP CRANE

- Folding and fixed frames available
- Robust, rugged construction
- Overload safety valve



£179.00
£215.00 INC. VAT
CFC100

Clarke

3-IN-1 SHEET METAL MACHINES

- Bend, Roll & Shear metal up to 1mm thick • Min. Rolling Diameter 39mm
- Bending angle 0-90°



£239.00
£286.00 INC. VAT
SBR610

Clarke

ANGLE GRINDERS

- Ideal for grinding, shearing & folding



£24.00
£29.00 INC. VAT
CON1150

Clarke

MMA & ARC/TIG INVERTER WELDERS

- Quality machines from Britain's leading supplier
- See online for included accessories



£79.00
£95.00 INC. VAT
MMA80

Clarke

MIG WELDERS

- Professional type torch with on/off control • Thermal overload protection • Turbo fan cooled
- Easy conversion to gas with optional accessories



£124.00
£149.00 INC. VAT
MIG102NG

Clarke

NO GAS/GAS MIG WELDERS

- Professional type torch with on/off control • Thermal overload protection • Turbo fan cooled
- Easy conversion to gas with optional accessories



£124.00
£149.00 INC. VAT
MIG102NG

Clarke

ARC ACTIVATED HEADSHIELDS

- Activates instantly when Arc is struck • Protects to EN379 • Suitable for arc, MIG, TIG & gas welding



£45.00
£55.00 INC. VAT
ARC ACTIVATED HEADSHIELDS

Clarke

VENTILATORS

- Range of single phase motors suited to many applications
- All totally enclosed & fan ventilated for reliable long-term service



£159.00
£191.00 INC. VAT
CAM400

Clarke

INDUSTRIAL ELECTRIC MOTORS

- Range of single phase motors suited to many applications
- All totally enclosed & fan ventilated for reliable long-term service



£59.00
£71.00 INC. VAT
INDUSTRIAL ELECTRIC MOTORS

Clarke

DRILL PRESSES

- Range of precision bench & floor presses for enthusiast, engineering & industrial applications



£69.00
£83.00 INC. VAT
DRILL PRESSES

Clarke

3-IN-1 SHEET METAL MACHINES

- Bend, Roll & Shear metal up to 1mm thick • Min. Rolling Diameter 39mm
- Bending angle 0-90°



£239.00
£286.00 INC. VAT
3-IN-1 SHEET METAL MACHINES

Clarke

ANGLE GRINDERS

- Ideal for grinding, shearing & folding



£24.00
£29.00 INC. VAT
ANGLE GRINDERS

Clarke

ROTARY TOOL KIT

- Kit includes: • Rotary tool • Height adjustable stand with clamp • 1m flexible drive • 40x accessories/consumables



£29.00
£35.00 INC. VAT
ROTARY TOOL KIT

Clarke

BENCH BUFFERS/POLISHERS

- For a brilliant shine



£84.00
£101.00 INC. VAT
BENCH BUFFERS/POLISHERS

Clarke

HYDRAULIC LIFTING TABLES

- Ideal for lifting & moving models
- Foot pedal operated




£319.00
£382.00 INC. VAT
HYDRAULIC LIFTING TABLES

Clarke

CONVERT 230V 1PH TO 400V 3PH

- Run big 3 phase woodworking machines from 1 phase supply
- Variable output power to match HP of motor to be run



£249.00
£298.00 INC. VAT
CONVERT 230V 1PH TO 400V 3PH

Clarke

ENGINEERS BENCH VICES

- A range of fixed and swivel vices with top quality cast iron construction



£19.00
£23.00 INC. VAT
ENGINEERS BENCH VICES

Clarke

WORKBENCH WITH PEGBOARD

- Easy to assemble, providing valuable working space and plenty of additional storage capacity.



£69.00
£82.00 INC. VAT
WORKBENCH WITH PEGBOARD

Clarke

1 TONNE FOLDING WORKSHOP CRANE

- Folding and fixed frames available
- Robust, rugged construction
- Overload safety valve



£179.00
£215.00 INC. VAT
1 TONNE FOLDING WORKSHOP CRANE

Clarke

3-IN-1 SHEET METAL MACHINES

- Bend, Roll & Shear metal up to 1mm thick • Min. Rolling Diameter 39mm
- Bending angle 0-90°



£239.00
£286.00 INC. VAT
3-IN-1 SHEET METAL MACHINES

Clarke

ANGLE GRINDERS

- Ideal for grinding, shearing & folding



£24.00
£29.00 INC. VAT
ANGLE GRINDERS

Clarke

MMA & ARC/TIG INVERTER WELDERS

- Quality machines from Britain's leading supplier
- See online for included accessories



£79.00
£95.00 INC. VAT
MMA & ARC/TIG INVERTER WELDERS

Clarke

MIG WELDERS

- Professional type torch with on/off control • Thermal overload protection • Turbo fan cooled
- Easy conversion to gas with optional accessories



£124.00
£149.00 INC. VAT
MIG WELDERS

Clarke

NO GAS/GAS MIG WELDERS

- Professional type torch with on/off control • Thermal overload protection • Turbo fan cooled
- Easy conversion to gas with optional accessories



£124.00
£149.00 INC. VAT
NO GAS/GAS MIG WELDERS

Clarke

ARC ACTIVATED HEADSHIELDS

- Activates instantly when Arc is struck • Protects to EN379 • Suitable for arc, MIG, TIG & gas welding



£45.00
£55.00 INC. VAT
ARC ACTIVATED HEADSHIELDS

Clarke

VENTILATORS

- Range of single phase motors suited to many applications
- All totally enclosed & fan ventilated for reliable long-term service



£159.00
£191.00 INC. VAT
VENTILATORS

Clarke

INDUSTRIAL ELECTRIC MOTORS

- Range of single phase motors suited to many applications
- All totally enclosed & fan ventilated for reliable long-term service



£59.00
£71.00 INC. VAT
INDUSTRIAL ELECTRIC MOTORS

Clarke

DRILL PRESSES

- Range of precision bench & floor presses for enthusiast, engineering & industrial applications



£69.00
£83.00 INC. VAT
DRILL PRESSES

Clarke

3-IN-1 SHEET METAL MACHINES

- Bend, Roll & Shear metal up to 1mm thick • Min. Rolling Diameter 39mm
- Bending angle 0-90°




£239.00
£286.00 INC. VAT
3-IN-1 SHEET METAL MACHINES

Clarke

ANGLE GRINDERS

- Ideal for grinding, shearing & folding



£24.00
£29.00 INC. VAT
ANGLE GRINDERS

Clarke

ROTARY TOOL KIT

- Kit includes: • Rotary tool • Height adjustable stand with clamp • 1m flexible drive • 40x accessories/consumables




£29.00
£35.00 INC. VAT
ROTARY TOOL KIT

Clarke

BENCH BUFFERS/POLISHERS

- For a brilliant shine



£84.00
£101.00 INC. VAT
BENCH BUFFERS/POLISHERS

Contents

9 A Lathe Mandrel Back Stop for a Myford Lathe

Peter Hodgkinson describes this aid to accuracy made for an ML10 lathe which should also fit the ML7 lathe.

13 Making D Bits for Injectors

Stewart Hart describes how to use a grinding to make accurate taper tooling.

17 Shaping A Keyway

Richard Lofting describes the making of a special tool to cut an internal keyway on a shaper.

22 Beginners' Workshop

In this issue Geometer looks at the applications of non-standard shaped files for wood and metal.

25 Mini Lathe Spindle Improvements and Modifications

Mike Cox commences a series of three related articles on spindle modifications for the popular Mini Lathes with a useful spindle extension.

28 Introducing Drilling Machines

Advice for beginners on benchtop drilling machines and their use.


32 Cutting Oils

New Zealand correspondent, Peter King, gets some thoughts about coolants and cutting oils off his chest

33 Model Engineers' Workshop Data Book

Metal Bending is the subject of this month's data book pages.

42

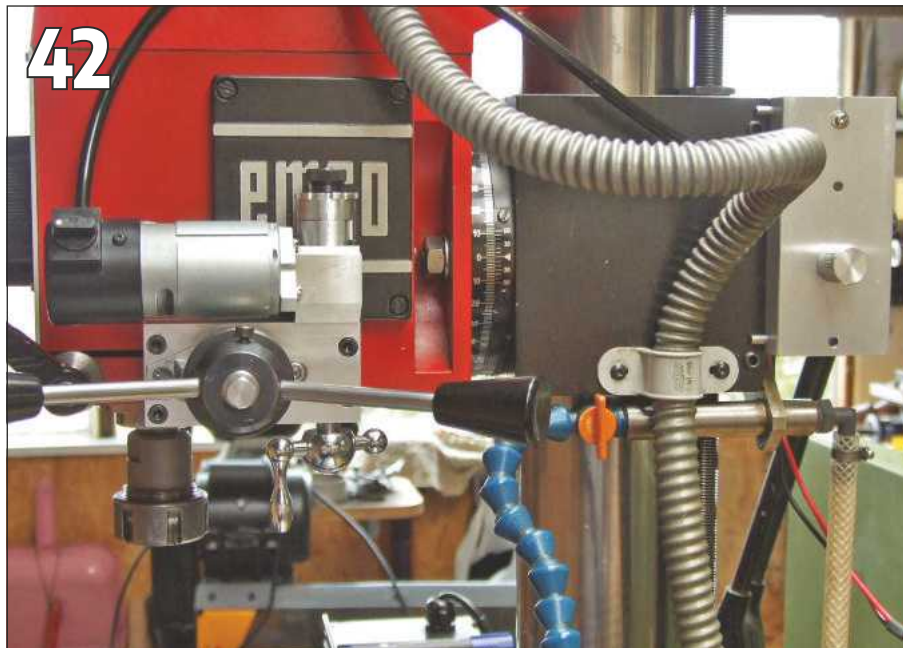

37 Quick change tool system for my Sieg KX1 CNC mill

Ian Johnson describes his simple system that could provide a big help to other users of benchtop CNC machines.

42 Fitting a Screwcutting Clutch to the Emco Maximat Super 11

Graham Meek describes an accessory thirty-three years in the making.

50 Bandsaw Blade Silver Soldering Station

Will Doggett describes a useful workshop tool for all bandsaw users.

58 Developing an Edge Finder

Roger Vane continues his detailed

description of an electronic edge finder, with instructions so you can make your own.



SUBSCRIBE TODAY!

GET YOUR FAVOURITE MAGAZINE FOR LESS DELIVERED TO YOUR DOOR!

See page 48 for details.

Coming up...

in our next issue

In our next issue we feature a Bluetooth DRO for a Myford, a fabricated vertical slide and adding versatility to the Diamond Toolholder



Regulars

3 On the Editor's Bench

We remember the Duke of Edinburgh's interest in our hobby.

15 Readers' Tips

This month's tip shows a simple accessory to make it easier to handle long lengths of stock.

54 Scribe A Line

An absolutely bumper harvest of readers' feedback this month.

64 Readers' Classifieds

More of your sale and wanted ads.

ON THE COVER >>>

This month's issue shows the swarf flying as a cutter held in one of Ian Johnson's KX-1 quick-change holders gets to work. Read more on page 37.



HOME FEATURES WORKSHOP EVENTS FORUMS ALBUMS

Visit our Website

www.model-engineer.co.uk

Why not follow us on Twitter:
twitter.com/ModelEngineers hashtag #MEW



THIS MONTH'S BONUS CONTENT

Log on to the website for extra content

Visit our website to access extra downloads, tutorials, examples and links.

www.model-engineer.co.uk/extracontent

Drilling and Tapping Size Chart

As well as the Model Engineers' Workshop Drill Size Chart originally given away as a pull-out in MEW, we plan to make the Model Engineers' Workshop Tapping Drill size chart available too soon.

How to make a spring

Advice on making a heavy-duty spring for an antique gun.

Home workshop insurance.

Sharing experience of ways to protect your workshop and equipment.

Stringer EW lathe

This fascinating old thread has come back to life with new contributions from owners of these vintage lathes

Come and have a Chat!

As well as plenty of engineering and hobby related discussion, we are happy for forum members to use it to share advice and support. If you feel isolated by the lockdown do join us and be assured of a warm welcome.

CLASSIFIEDS EXTRA SUBSCRIBE ARCHIVE SUPPLIERS

**MARKET LEADER IN LARGE
SCALE, READY-TO-RUN,
LIVE STEAM**


The 3F "Jinty" Class

Some 425 of these locomotives were manufactured between 1924 and 1931. Mainly allocated to shunting and station pilot duties they also undertook occasional branch line work. The "Jinties" were frequently used for banking duties with up to three at a time seen assisting express passenger trains up the Lickey Incline on the Bristol-Birmingham line near Bromsgrove. They were frequently seen banking trains out of London Euston up to Camden - a particularly demanding task!

Designed by Sir Henry Fowler for the London, Midland and Scottish Railway they were based on earlier designs by S&W. Johnson.

Some of the locomotives were loaned to the War Department in WWII, providing welcome logistical support to the allied war effort.

A majority of locomotives enjoyed long service with the final "Jinty" withdrawn in 1967, right at the end of the steam era. The locomotives were always painted in un-lined black livery. Before nationalisation in 1948 LMS initials were carried on the tank sides. In BR service either lion crest was carried according to period.

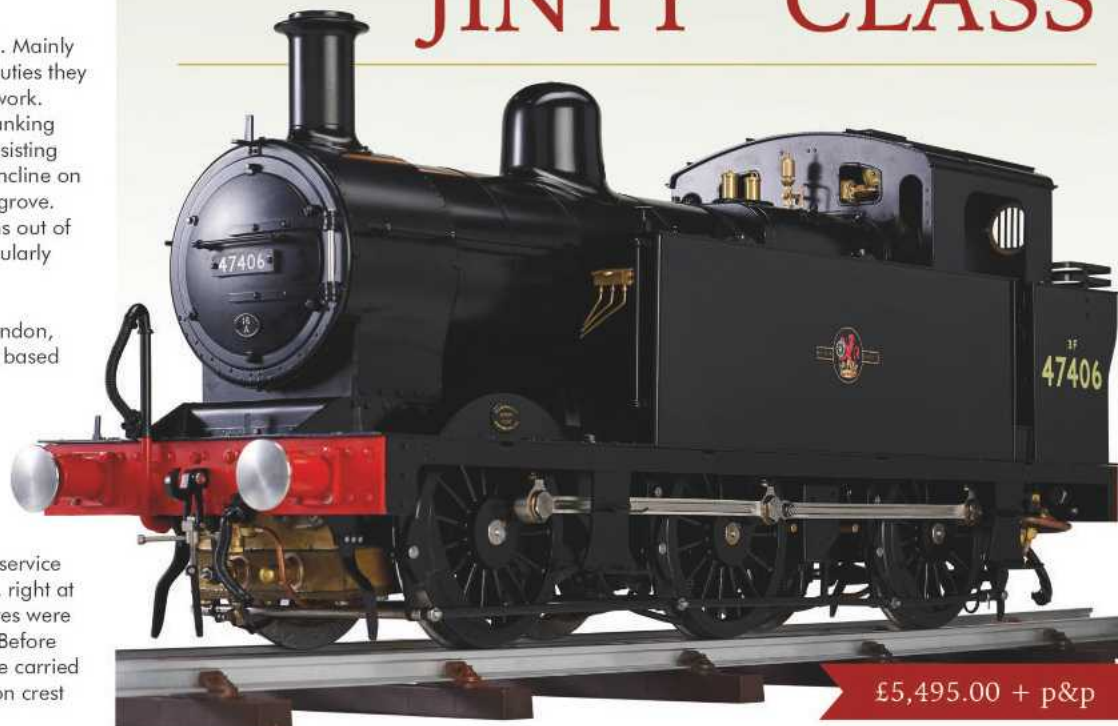

£5,495.00 + p&p

Summary Specification



Approx length 33"

- Stainless steel motion
- Boiler feed by cross head pump, injector, hand pump
- Etched brass body with rivet detail
- Two safety valves
- Choice of emblems
- Painted and ready-to-run
- Coal-fired live steam
- 5" gauge
- 2 inside cylinders
- Slide valves
- Stephenson valve gear
- Drain cocks
- Mechanical Lubricator
- Silver soldered copper boiler
- Multi-element Superheater
- Reverser
- Approx Dimensions:
Length: 33"
Width: 9.5"
Height: 14"
Weight: 44kg

The 5" Gauge Model

We have introduced the "Jinty" to our growing range of models due to requests received from a number of customers who are keen to own one. At just £5,495.00 + shipping this 5" gauge model offers unbeatable value-for-money. The model is coal-fired and its 0-6-0 wheel arrangement provides a powerful locomotive capable of pulling a number of adults. Its ability to negotiate tight curves makes it a perfect candidate for your garden railway. The model is delivered ready-to-run and painted with your choice of LMS lettering, or BR crest.

Each is complete with a silver soldered copper boiler, hydraulically tested to twice working pressure. All boilers comply with the latest regulations and are appropriately marked and certificated. The locomotive's compact size makes this an ideal model to display, transport and drive. As testament to our confidence in the high quality of this model we are pleased to offer a full 2 years warranty. Our customer service is considered to be second-to-none.

The "Jinty" is a powerful locomotive for its size and can negotiate tight curves, making it ideal for a garden railway. It incorporates our latest technical improvements including mechanically operated drain cocks. As an award winning professional model maker I am delighted to have been involved in the development of this first class live steam locomotive"

Mike Pavie



Delivery and Payment

Save £195.00. Free p&p for any order received within 28 days.

The order book is now open and we are happy to accept your order reservation for a deposit of just £995.00.

We will request an interim payment of £2,000.00 in August 2021 as the build of your model progresses, a further stage payment of £2,000.00 in November and a final payment of £500.00 in January 2022 in advance of delivery



Request your free brochure today

Request your free brochure today by e-mail, telephone, or by returning the coupon opposite.

Telephone: **01327 705 259**

E-mail: **info@silvercrestmodels.co.uk**

Find more information at
www.silvercrestmodels.co.uk

Please send, without obligation, my free 5" gauge "Jinty" brochure.

Name: _____

Address: _____

Post Code: _____

Please send to: Silver Crest Models Limited,
18 Cottesbrooke Park, Heartlands Business Park,
Daventry, Northamptonshire NN11 8YL

MEW

Company registered number 7425348

A Lathe Mandrel Back Stop for a Myford Lathe




Peter Hodgkinson describes this aid to accuracy made for an ML10 lathe which should also fit the ML7 lathe.


For many years, I have owned a Cowell 90ME, which has proved to be an accurate and solid workhorse capable of handling work beyond its capacity. However, the dream was always to own a lathe of similar durable construction but of larger capacity. The opportunity arose when I was informed of a Myford ML10 lathe (the 'Speed' version in long bed format) in very good condition 'VGC'. Once the ML10 was up and running a sense of déjà vu –all the bits I had made over the years for the Cowell had to be re-made or adapted for the ML10.

This article covers the re-design of the of a mandrel backstop based around designs by Radford and Thomas, but with modifications to suit my needs for long axes, nut thinning and even used with ER collets for stud production. The design allows maximum distance in the mandrel bore, can be fitted without removing the chuck and allows fine adjustment from the quadrant end of the mandrel.


The ML10 suffers from having a 25 tooth 20 DP gear fixed to the rear of the mandrel which precludes the routine removal to fit a device to a concentric diameter, therefore all the back stop parts have to fit within the $+\frac{5}{8}$ " bore and run concentrically. When I started with the hobby of small-scale engineering, I decided to go metric, even though imperial stock and equipment was the more common. As I work mainly from scrap/off cuts of material, I make no apologies for mixed dimensions, if that is what they are on the job.

All the material is mild steel except for the depthing rod, which is 6mm, silver steel and the coupler which is 12mm silver steel. $\frac{1}{4}$ " silver steel can be used so long as you correct the appropriate

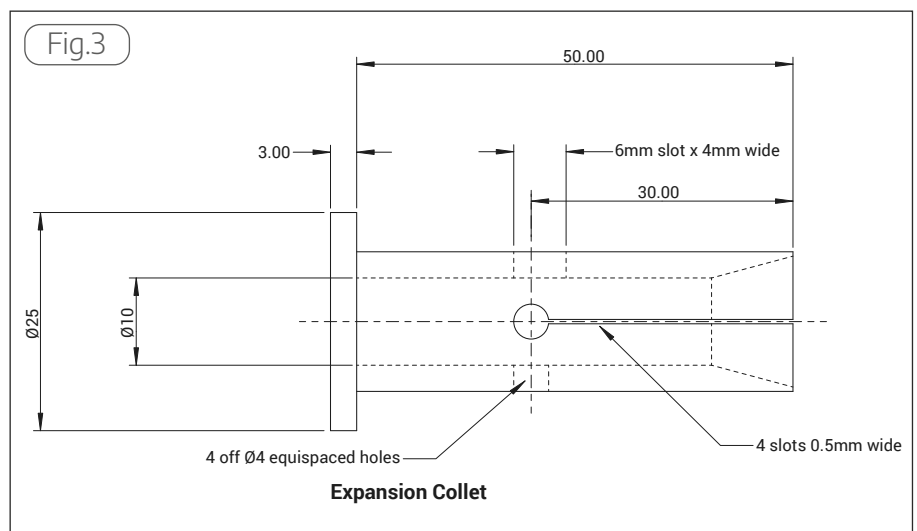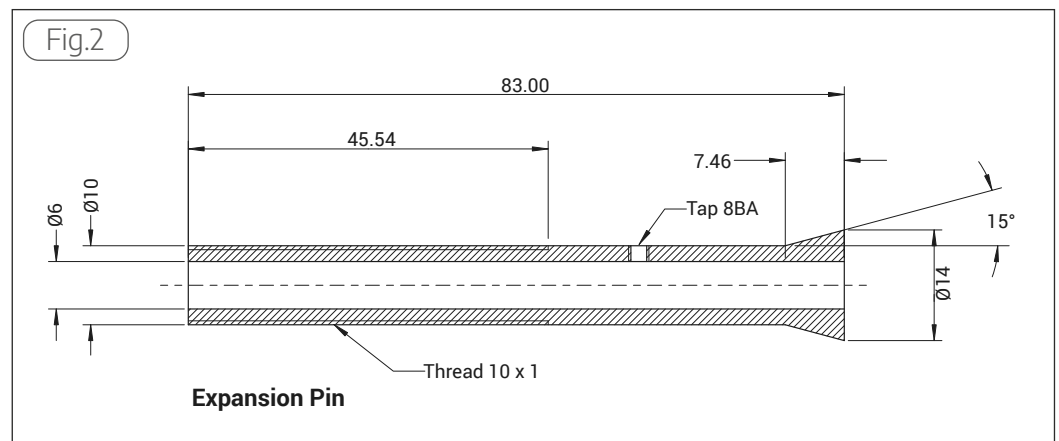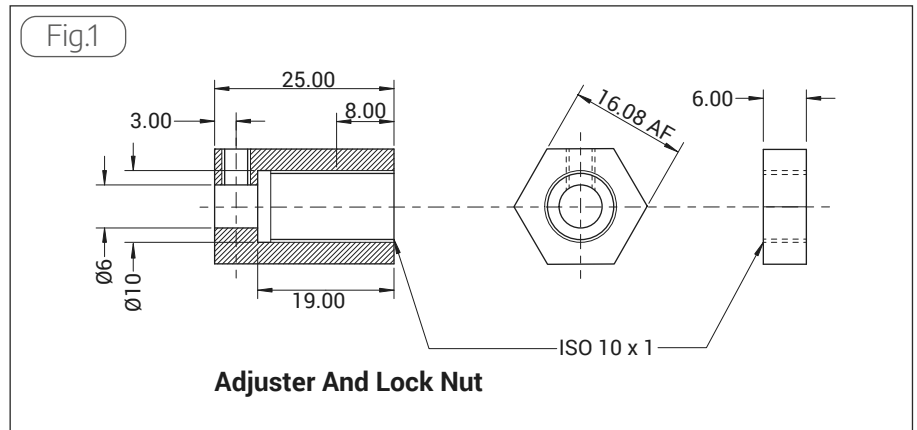

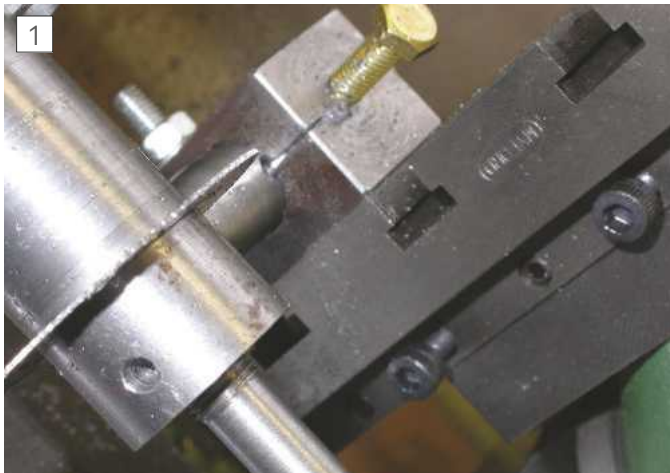

Slitting the collet in a simple jig.

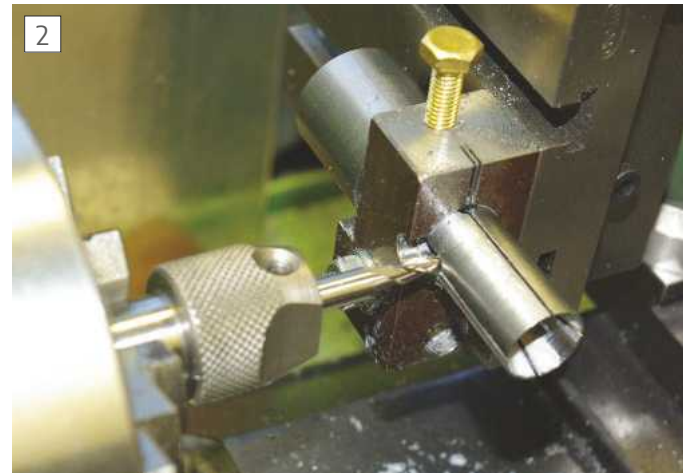

Jig modification to allow cross hole drilling, slitting, slotting and tapping to take place with minimum work changes.


bores. All the dimensions on the mandrel bore are based on a nominal 16mm. The ML7 version requires a longer length of silver steel. Silver steel is readily available from stockist up to 1m, however, check against your lathe.

I suggest that the fine adjuster nut and lock nut are made first, **fig. 1**, followed by the draw bolt and then the collet and finally the deepthing rod with attachments.

Select a suitable piece of hexagon bar that will pass through the gear train cover and long enough to make both the adjuster and lock nut plus material

for parting off and cleaning up. Chuck the hexagon bar face, centre drill and drill through in stages to 5.9mm. Open up to 8mm for the required depth and finally bore to 9mm and screw cut 10 x 1mm (a standard spark plug size and taps and dies are readily available). I particularly like this size as it gives fine adjustment 1revolution=1mm and is close to $\frac{1}{25}$ " for imperial work. Now open up the 5.9mm hole with a 6mm reamer and check with the silver steel rod for a nice sliding fit. Part-off a section wide enough for the lock nut clean up and finally drill and tap the adjuster nut for the 4mm grub screw. This part will be used later as a gauge when screw cutting the draw bolt.

Next, comes the draw bolt/expansion pin, **fig. 2**. This is made from 16 or 15mm mild steel. The length needs to be long enough to allow all the machining except the bore at one setting. First face and

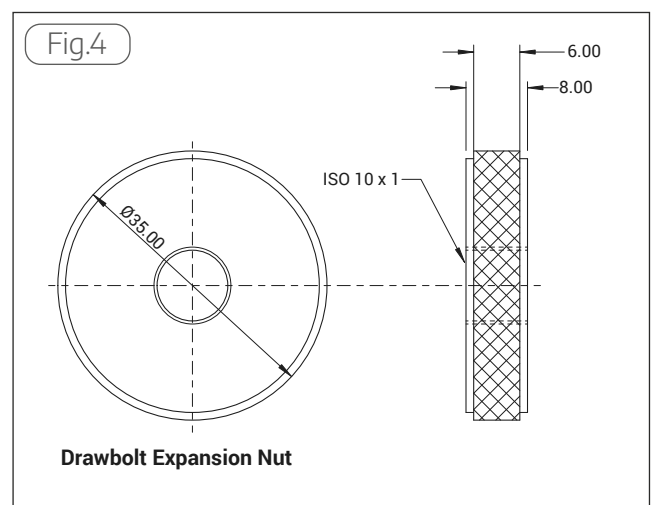


centre one end of the bar keeping the centre small. Extend the bar far enough to complete all the turning work and support with a live centre. Take a light cleaning cut and reduce the stock to 10mm for the required length, screw cut 10x1mm and obtain a nice fit with the adjuster nut. Set over the top slide to 15 degrees and with a sharp tool cut the taper section. Now reduce the bar to 14mm and part off. I left a short parallel after the taper, this was for an idea that did not materialise. Reverse the draw bolt




and lightly grip in the chuck or collet. Face, centre drill, and carefully drill in stages to 5.9mm and finally ream to 6mm. The position of the 8BA tapped hole for the retaining screw is determined later during work on the collet.

The collet body is next, **fig. 3**, and I made mine from 25mm stock, but any size material near this could be used. You will need enough bar to complete the turning in one operation. Carefully



Drilling for the 8BA retaining screw. The same set up is used to mill the 4mm slot for the 8BA retaining screw.

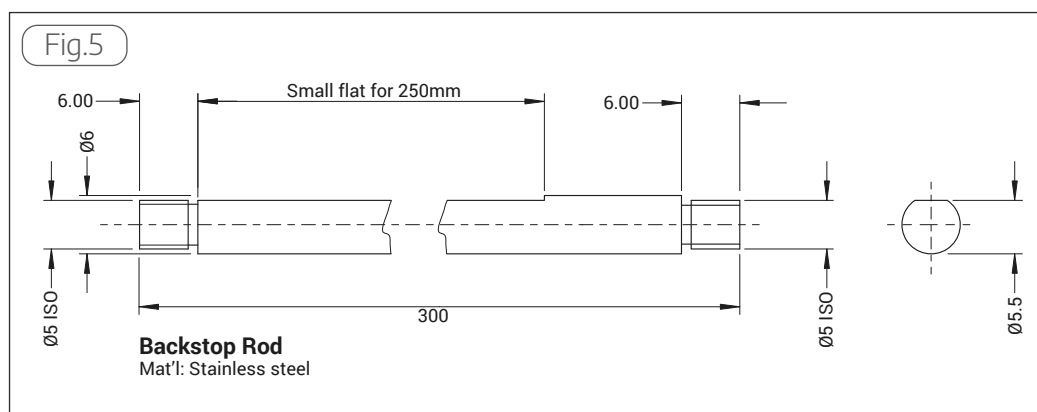


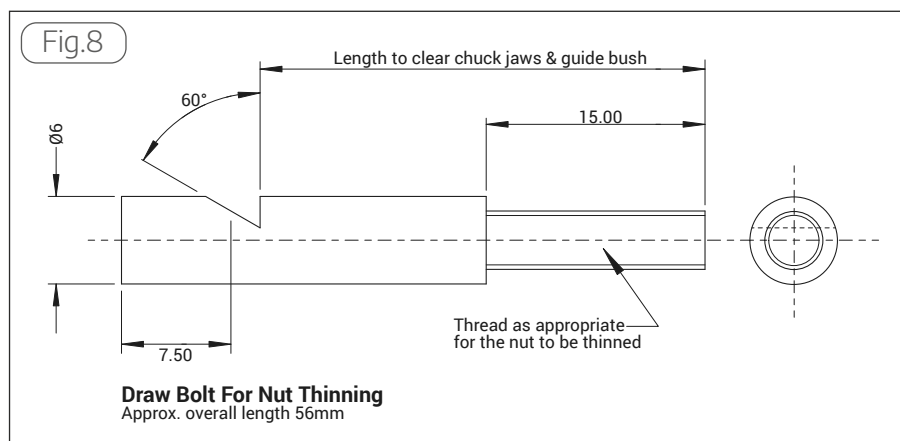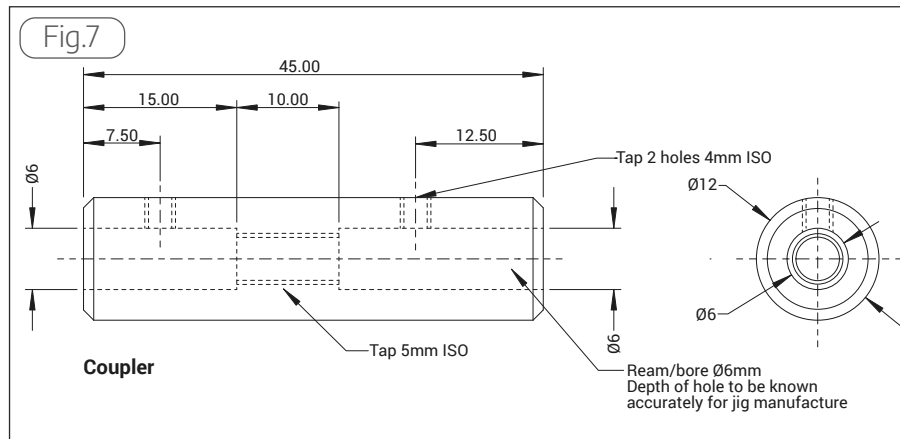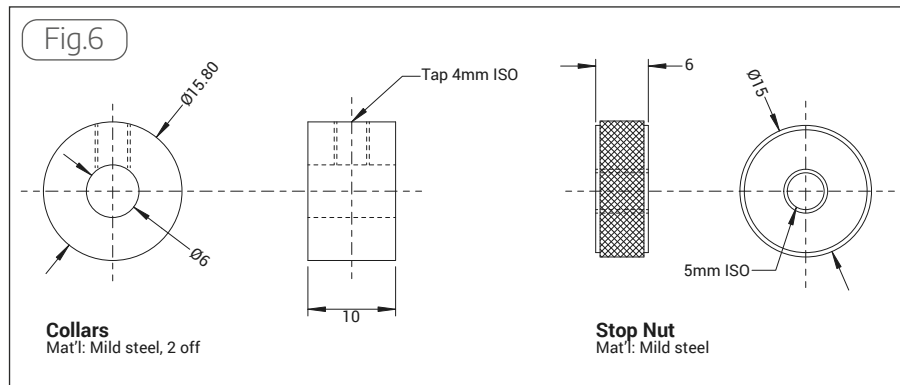

face and centre one end, support with a live centre and reduced to finished diameter to suit the mandrel bore- nice sliding fit. Face the area that sits against the mandrel end to ensure a square shoulder. With a fixed steady set on the nominal 16mm, drill in stages to 10mm and check with the expansion pin/bolt that this is a clearance size. (10.1mm will do nicely). Set up a small boring bar and with the cross slide set over at 15 degrees cut the taper leaving a small land at the end of the collet. Remove the chucking excess and face to length.

If like me, you do not have a milling machine you will have to make a small simple jig before cross drilling and slitting using the lathes vertical slide. The jig is a short length of 25mm square

bar bored to take the collet with a 6mm taped hole for the clamping bolt and a 6mm clearance hole to clamp the jig to the vertical slide. The bored hole is not on the centreline so that the 25mm can clear the slide. Drilling of the four cross holes is a simple matter of inserting the collet having first marked the distance in from the taper and used my tool height setting gauge (See George Thomas' book, the 'Model Engineers' Workshop Manual') to mark the position of the four hole centres and slots. The tool setting gauge was used to locate the top of the collet and then the slide was raised half the collet diameter and with the aid of a 'sticky pin' and hand lens the centres of the holes can be located. **Photograph 1** shows the jig in use, however the jig was modified

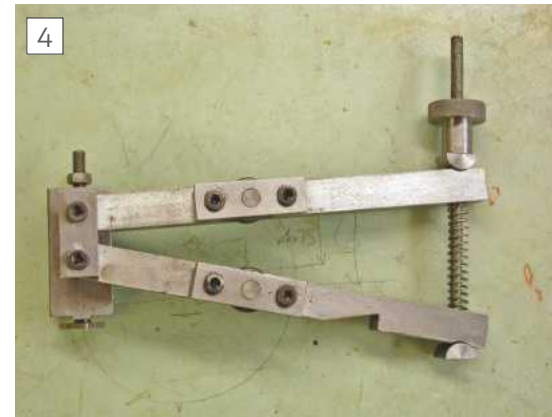

Knurling tool used for the Thumb nut

later to make the task easier, **photo 2**. I have had no problems with this set up providing light cuts are made.

Location of the 8BA tapped hole uses the jig set up as **photo 3**, with the expansion pin pulled tightly in position. The collet is prevented from over expanding by use of the 5/8" bored gear.

The knurled thumb nut, **fig. 4**, is probably the most difficult part to make, however a simple alternative might be made from plain round stock with tommy-bar holes or large section hexagon bar. The thumbnut is made from 35mm bar, which was faced and then skimmed to remove hard spots. With enough material out of the chuck, cut a groove 8mm in from the face and some 10mm wide. My Knurling tool, **photo 4**, is one made for the Cowell and mounts on the rear of the cross slide. With the use of a raising block the knurling tool will just manage 35mm. I set the knurl wheel on the lathe centre line and 75% onto the work. The lathe is set at the slowest speed for this diameter and the knurls are then traversed to 25% passed the knurl face and traversed back to the start. Pressure is increased in small amounts until the correct diamond pattern is achieved. I apply copious amounts of lubrication fluid (60% SAE40 oil to 40%



Filing the 0.5mm flat on the depthing rod. ➤




The major components.



All the bits ready for use. Bits on the right are accessories made as you need them.

white Spirit) I find this works well, as it washes away the metal shards and lubricates the knurls.

The depth rod is next, **fig. 5**, and of all the items, the long parallel flat face on this rod gave me greatest concern. However, I managed to file the flat, which took less than forty minutes. The first operation is to turn the end diameters down to 5mm and screw cut the 5mm threads (they need to be concentric). The end that attaches to the accessories will need a small relief turning to coincide with the locking screw. This relief area is identified from the screw witness mark as and when the coupler is made. Once all the threading is complete, the rod is clamped to a piece of heavy-duty angle as in **photo 5** and using a single cut file the flat was formed. The angle iron helps to keep the file parallel, and the fine

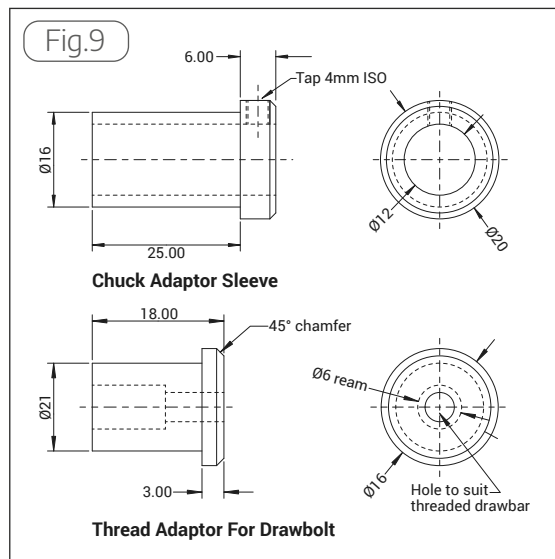


7, this requires a little delicacy in getting the 6mm bore flat bottomed and concentric.

The coupler is made from stock 12mm silver steel bar held in a collet chuck. Drill through 4.2mm open out one end to 5.9mm and with a 6mm end mill held true in the tails stock form the 25mm deep x6mm bore, reverse in the collet and complete the 15mm deep bore. Finally tap 5mm and drill and tap the two 4mm holes. The 15mm deep hole screws onto the depthing rod, whilst the other end holds the other bits.

The nut thinning attachment, **fig. 8**, **photo 9**, is used in conjunction with a simple chuck and reducing sleeve, **fig. 9**. The simple chuck is a piece of 20mm bar reduced to 16mm and bored 12mm. The 12mm bore

needs to register correctly with your chuck, so once the 16mm is turned the item needs parting off and then reversed in the chuck. I marked the location of No1 jaw with a small centre pop mark, this usually give a fair degree of return concentricity. When marked the 16mm bore can be cut, drill in stages to 15mm and finally bore out to 16mm. Finally drill and tap for the 4mm retaining screw. The sleeve is a similar turning operation again marking with a centre pop so that they all line up with Jaw No1. I make sleeves to suit, as when required.

I make back stop pads, **fig. 10**, as required from off cuts. It is advisable to think ahead and make new ones prior to being required. ■

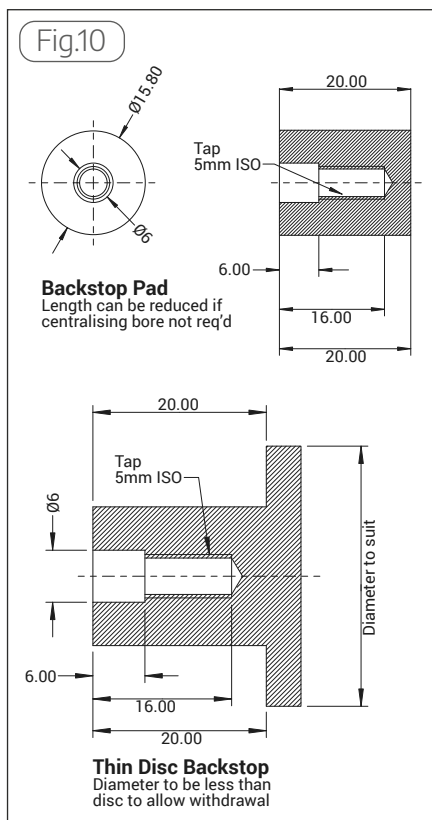

adjusting nut and grub screw are used as a gauge. The result was a 'flat' parallel to better than 0.02mm. The main parts are shown in **photos 6** and **7**.

Accessories

The accessories are mainly simple turning jobs and don't require much detail. The collars are used to provide pull when thinning nuts and to centralise the depthing rod in the mandrel bore, **fig. 6**, **photo 8**. The stop nut is to provide a more positive fixed point when thinning larger steel nuts. A spacer tube is placed between this stop nut and the adjuster. I make these as required from 10mm OD tube or simply drill a piece of suitable length rod 6.5mm

Next is the accessory coupler, **fig.**



Set up for nut thinning



The depthing rod and collar being used to pull the nut against the face of the sleeve



Making D Bits for Injectors

Stewart Hart explains how to make special tapered high speed steel D-bits by grinding.

Tapered "D" bits for making the cones of steam injectors are usually made from Silver steel, with the taper machined in the lathe, with the compound slide set at the required angle, they are then sectioned and hardened and tempered.

This method will result in a perfectly functional D-bit. However, the method is not without its difficulties and shortcomings. The taper needs to be turned with a razor sharp tool set perfectly on centre, to avoid deflecting the point of the bit this results in an inaccurate taper, and the turning marks need polishing out. When you harden the bit, there is a danger that the very point of the bit will melt due to uneven heating and it will distort when quenched and it is very difficult to get an even temper.

I have successfully made injectors

using D-bits made by this method, but the difficulties led me to developing a method of making bits from high speed steel. Key to the method is the availability of a cutter grinder with an end mill grinding attachment, my own cutter grinder I put together using commercially available parts: an X-Y Table, a Myford vertical milling slide, and an ordinary bench grinder, all bolted together and fastened to a base plate. The end mill grinding attachment I fashioned from a 2" square chunk of aluminium, and a straight shank ER32



Setting the fixture to required angle




Grinding the taper by rotating by hand



Measure the diameter over the stop



Measure the height

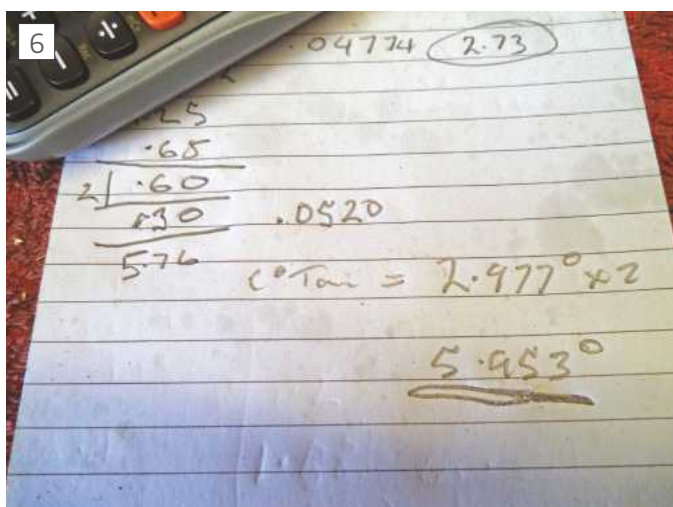

Example of calculation



Sectioning D Bit with stone point held in the mill

collet holder, with an index ring and detent. But any of the home workshop tool grinding fixtures such as the "Quorn" or Harold Hall's fixture can be adopted for the purpose.

The starting point is 5mm diameter high speed steel blanks, these come in 4" length and are available through any of the suppliers or online. Two bits can be made from a 4" length so the first job is to cut a length in half this is easily done on the bench grinder, and again using the bench grinder with the blank held in a drill, rough grind a taper for 1/2" length, to reduce the amount the TC grinder will have to remove, **photo 1**.

You will need a grinding wheel with a fairly hard bond of about 1/2" width, first dress the wheel up square to the table using a diamond, then set the end mill grinding fixture over to the desired angle, **photo 2**. Grip the D-bit in the fixture, remove the detent, and simply rotate by hand and gradually grind back until it cleans up, **photo 3**. To check the accuracy of the taper you will have to resort to a bit of trigonometry. First you

will need to make a 5mm stop bush, clamp this bush to the D-bit using a grub screw and using a digital Vernier measure the diameter of the D-bit at the stop position and note it down, **photo 4**. Then zero a digital height gauge on the point of the D-bit, move the bush up the D-bit a couple of mm, measure the diameter again and measure the change of height making a note of the sizes, **photo 5**. Work out the change in diameter by taking one from then divide by 2, then divide by the change of height, this will give you the tan (tangent) of the angle and the arc-tan will give you the angle, multiply this by 2 and you will have the inclusive angle of the taper of the D-bit. Make any adjustments and repeat the process until you get the desired angle. In the example in **photo 6**, I was aiming for a 6 degree angle and

achieved 5.953 degrees: close enough for me.

To section the D-bit first rough out on the bench grinder then with a stone point held in the mill at fast speed (in my case 1800RPM) and the bit held vertical grind back to 2.6 mm – half the blank diameter plus 0.1mm, just over centre, **photo 7**.

I've found that this method of making D-Bits is far easier than the turning method and in use they cut very smooth, clean and accurate and give an excellent finish and are long lasting, **photo 8**. ■



Readers' Tips



Bandsaw Roller Support

TIP OF
THE MONTH
WINNER!



This month our lucky winner of £30 in Chester gift vouchers is David Ambrose from West Sussex who has come up with a simple support to help with managing longer stock on a workshop bandsaw.

Like many of us, my workshop is in our garage. However, unusually for this day and age, we also keep our car in the garage. This means that space is at a premium, so my new bandsaw had to be of the portable variety, so it could be stored on a shelf. It is normally placed on my Workmate for use. This meant that when I decided I needed a roller stand for supporting longer material, it would also have to be of the portable variety.

Having seen what I had in stock, I came up with this very basic, but effective, solution. The roller is from a piece of solid steel curtain pole. It may be mild steel, but it is certainly not free-cutting, as I found when I faced, drilled and tapped it. It is also coated with some sort of plastic, which has rusted slightly underneath. The "trunnions" are a pair of old curtain pelmet brackets, and the timber base was cut from a piece recovered from a skip. Weirdly, the combination of roller, brackets and timber resulted in the top of the roller being almost exactly 12cm above the bench, which is the same as the height of the vice on the saw, so no shimming or trimming was necessary.

Not very elegant, but does the job perfectly, and cost nothing..

We have £30 in gift vouchers courtesy of engineering suppliers Chester Machine Tools for each month's 'Top Tip'.

Email your workshop tips to neil.wyatt@mytimemedia.com marking them 'Readers Tips', and you could be a winner. Try to keep your tip to no more than 400 words and a picture or drawing. Don't forget to include your address! Every month I'll chose a selection for publication and the one chosen as *Tip of the Month* will win £30 in gift vouchers from Chester Machine Tools. Visit www.chestershobbystore.com to plan how to spend yours!

Please note that the first prize of Chester Vouchers is only available to UK readers. You can make multiple entries, but we reserve the right not to award repeat prizes to the same person in order to encourage new entrants. All prizes are at the discretion of the Editor.

MAXITRAK.COM

The best of model rail and road.

Tel: 01580 893030 Email: info@maxitrak.com



5" Gauge Class 73

Kit From £2,075

Ready to Run -

£4,490



5" Gauge Class

25

Kit From £2,075

Ready to Run -

£4,490

Finance available
Terms and conditions apply

5" Gauge EM

Baldwin

Kit From £1,995

Ready to Run

£2,350

Radio Control
options
available



TIG
Welded
Boilers

MAIDSTONE-ENGINEERING.COM

Brand New Website Live Stock System

One stop model
engineering shop


Leading suppliers of fittings, fixings,
brass, copper, bronze and steel

MAIDSTONE
ENGINEERING
SUPPLIES

Call us on 01580 890066
Visit us 10-11 Larkstore Park, Lodge Road, Staplehurst, Kent, TN12 0QY

Don't know what it's worth?

- Good prices paid for all live steam models
Locomotives from gauge 1 to 10 1/4 inch
Traction engines to 6 inch scale
Part-built or broken through to exhibition quality
- A no-obligation offer and firm decision
over the telephone
- Fully-insured collection nationwide
- Payment in full on collection

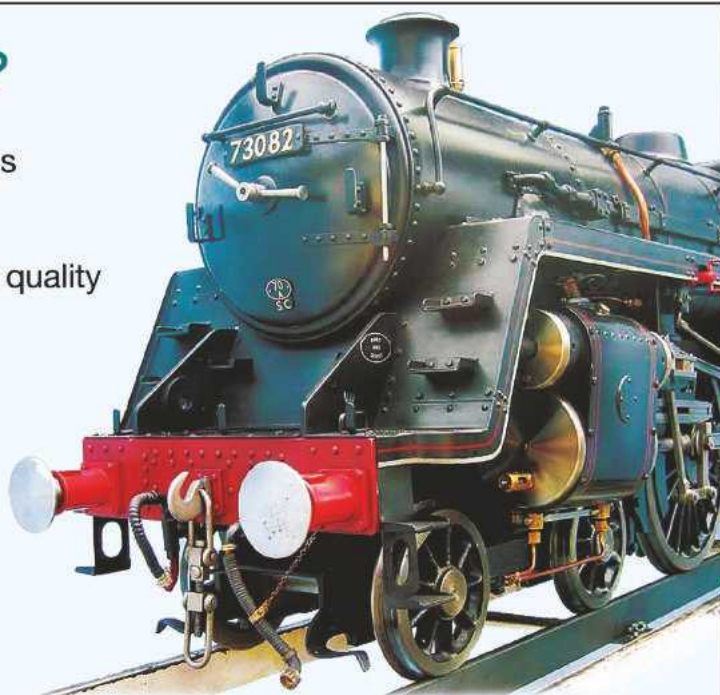

Speak to the experts

STATIONROADSTEAM.COM

Build, buy & sell all types and sizes of locomotives, traction & stationary engines

Call Mike or Jayne Palmer on 01526 328772

Station Road Steam Ltd, Unit 16 Moorlands Industrial Estate, Metheringham, Lincs LN4 3HX

Open daily Monday to Friday from 8am to 6pm, visitors welcome by appointment

Shaping A Keyway

Richard Lofting has written three books in the Crowood metalwork series, *Welding, Brazing and Soldering*, and *Heat Treatment*. He has also written the book *Vintage and Classic Tractor Restoration* and writes a monthly workshop column for *Tractor and Farming Heritage* magazine. Here he describes the making of a special tool to cut an internal keyway on a shaper

I have been keenly reading Bill Morris's series on setting up the shaping machine, as I had bought an Alba 2S model that had been lurking in the old defunct machine shop of a local factory, if the motor label is anything to go by it is a 1938 model. In fact the guy that was in charge of the sales (eBay) said the machine shop had been closed up since 1985 as they were buying in stuff rather than making it on site and the decision had now been made to sell off the equipment. The machine, on our arrival at the factory was still 'plumbed in' to the three phase supply, so we could see the machine operating. Once at home I managed to find the star connection buried inside the motor and bring the wires out to the connection box and wire it in a delta configuration so that I could run the machine from 240 volts provided through a cheap Chinese VFD obtained from Ebay.

It's the old story, I was not actively looking for a shaper, I was browsing ebay when I stumbled upon the advert and it was less than 10 miles away from me. I then thought of all the jobs I needed it for and put a silly bid on and forgot about it, several days later I had won the machine. The most pressing job on the list had been a pulley repair from one of our vintage tractors.

I had also recently purchased a Centec 2b milling machine, and had used this to bore out the centre of the cast iron pulley as it had worn internally due to the retaining nut that holds the pulley to the hydraulic pump having loosened over the years, the pulley is just too large to fit in our Myford ML10 lathe so I made an adapter to put the lathe chuck on the mill and made a tool post to fit on the table. Turning a replacement sleeve was achieved on said lathe. The sleeve was glued, screwed and for good measure 'Dutch screwed' into the bored out pulley. The remaining job that was left was to cut the keyway in the new sleeve.



The completed adapter.



The adapter after machining and thread cutting

The last time I had used a shaper was some 43 years ago at college and that was some plain cutting, nothing as fancy as a keyway! If I remember correctly, it was a Boxford. I did some initial practice reducing the shanks of some large cutting tools that came with the machine as they were too big to fit the lantern post. From looking at a brochure on the machine, found on the internet, I saw they originally supplied a special tool for internal cutting that was fitted in the clapper box. I realised this was what I needed for the keyway job, but rather than make a one off tool as it would need to be rather small diameter as the hole through the pulley is only 15mm, I thought I would make a tool holder to fit the clapper box and then make a tool to fit this so when I have other similar jobs of different sizes I can then make another tool to fit the holder rather than starting from scratch each time.

The Tool Holder

I had bought a 6 foot length of 1¾ inch diameter mild steel bar cheaply and with a 4½ inch section of this sliced off with the power hacksaw, I began by measuring the lantern post that is in the shaper and transferring these measurements to the piece of steel. A friend had given me several bags of nuts and bolts that were surplus to his requirements, if I hadn't had them,



The tool bit holder after cutting the slot.



The completed tool as used to cut the keyway.

they were destined for the scrap yard, I hate waste, so soon found them space! In the mixed bag of mainly Imperial nuts, I found one large nut that had the same inside diameter as the lantern post and with a thread gauge managed to deduce that it was 12 tpi and from a thread table worked out it was 1¾ UNF. The nut was castellated, this



I wired the two pieces together for silver soldering.

was soon turned off in the lathe as it was not needed for this job. The lathe was set up to turn the 12 tpi thread, I had bought a 60° carbide tipped thread cutting tool, so this was a good opportunity to give it a try. I cut a recess where I wanted the thread to end to the depth of the inside of the thread in the nut. As the thread neared completion, I slackened the tail stock and tried the nut on the thread for fit, it was tight, this took several goes taking a very fine cut until the nut would run up the thread without binding, and a fine file took the peaks off the threads. I had initially used the tailstock with a revolving centre as a support as I was taking some hefty cuts to get the stock down to size on the small lathe!

Once the thread was completed a trial fit on the shaper was in order, and it fitted nicely with the thread just going through the clapper hole. I bored the business end of the tool holder to ¾ inch diameter then bored and tapped two holes M6 through the side as I had some cap head screws to secure the tool in position, **photo 2**, after reducing the length and tidying up the ends.

The Keyway Tool

The hardest part of making the tool is cutting the square hole, **photo 3**, through the round shank of the tool, my idea is not original as I saw it somewhere on the internet but seems



Setting up the pulley and tool for alignment in the shaper vice.


the most logical and easiest way to produce it without a broach. The keyway needed to be $\frac{3}{16}$ inch in the pulley so this is the size of the hole through the tool. I cut the slot through with the shaper, I could have done it on the mill, but at that time I hadn't got the right sized cutter. Although I needed the finished tool to have a diameter less than the 15mm hole in the pulley I started with a section of a large bolt of $\frac{3}{4}$ inch diameter as the locating hole in the tool holder I bored at $\frac{3}{4}$ inch. My thoughts were that it would be easier to cut the hole through the larger diameter and once complete to turn it down to size in the lathe, it would also be a good time to bore and tap the end of the tool for the

tool bit holding bolt, this was an M4 grub screw with an Allan key head. The technique is to cut a slot from the end of the bar and then make a cap to fit and then silver solder the two together, **photo 4**, ending up with a square hole of the right dimensions so the tool bit is a snug fit, **photo 5**. Once both parts were machined to size and silver soldered together, the tool was put back in the lathe and turned down to just over $\frac{1}{2}$ inch diameter, this would give the clearance for the cutter that needs to extend $\frac{3}{32}$ inch just under 94 thou from the tool body. At the $\frac{3}{4}$ inch end of the tool I milled a flat for the two locking screws to hold the tool in position.

Clamping the Pulley

Thoughts had turned to how to accurately align the pulley to the axis of the shaper, I have a swivel vice attached to the shaper, this came via a friend, as a standard 6 inch machine vice

came with the shaper originally when I purchased it and I soon worked out that to clamp it 90° to the direction of cut was going to be a challenge. Discussing this dilemma with said friend over a cup of tea revealed he had a spare swivel vice he had been tripping over and wanted to get rid of it, ok its a little on the large side, it would probably have been fitted to an 18 inch cut shaper, but it fits the table on my mere 14 inches of cut Alba. Now with the vice 90° to the cut there was not enough room to get the cutter and pulley in, as the ram was already as far back as it would go. I am a self-confessed skip raider and have been hoarding several chunks of steel that I found in a skip, they looked like counter weights of some description, powder coated in bright orange. Again, the shaper was put to work removing the coating and squaring up one of the blocks. This was just the right size to put against the fixed jaw of the

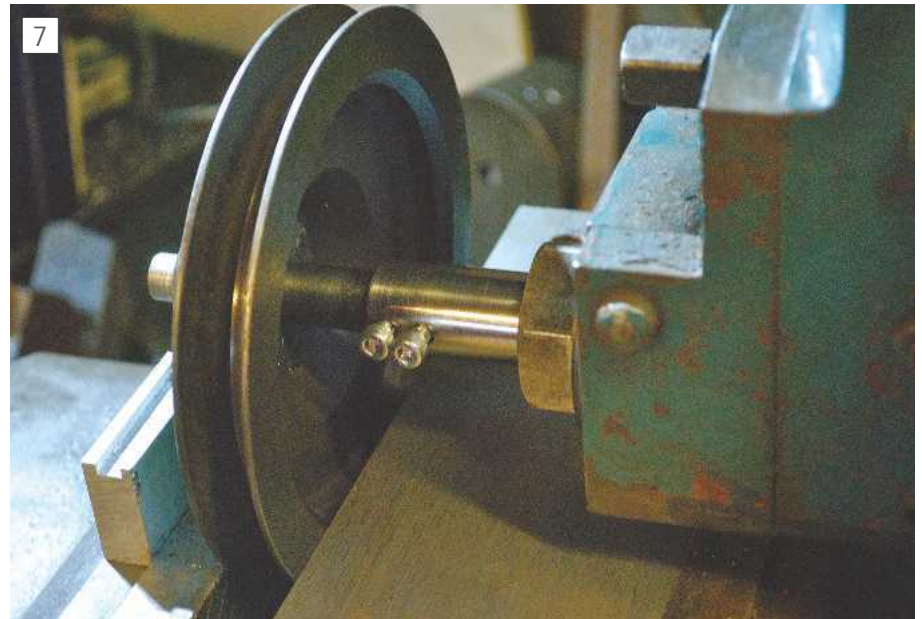

At this stage I also set the stroke length to suit.



The first tool bit, shaped freehand on the bench grinder.



Once all the machining had been done the tool was tightened in position.



After a few strokes there was a bang and the tool bit shattered as it dug in!



The second attempt with a new tool bit, cutting upwards, went as it should.

vice, moving the pulley approximately 4 inches away from the ram giving enough room to complete the job.

I had already ascertained that the swivel vice does not conform to the angle scale on its side, I am not sure whether it is my table or the vice that is out as I still have to do a few tests as advocated by Bill in his shaper series recently in this magazine. Having fitted the tool into the adapter before finally sizing the shaft to allow for clearance, I turned it to the size of the shaft of the pump the pulley fits on. I fitted the pulley to this, **photo 6**, and then tightened the vice followed by the swivel locking bolts. The angle indicator is showing it is out by almost a degree. By turning the machine by hand, the tool goes in and out of the pulley without binding. At this stage I set the stroke length and position, **photo 7**, for this job as I was happy with the alignment. The pulley was left in position in the vice while I removed the tool and turned it down to final size so on refitting it would be still in alignment.

The Tool Bit

I carefully ground a tool bit freehand from a length of $\frac{3}{16}$ inch HSS tool steel on the bench grinder and then finished the cutting edge with a diamond file, the bit was cut to length by nicking the four corners and giving it a clout, **photo 8**.

Once all set up and the tool bit installed in the holder, **photo 9**, and the VFD set to a slow pace, I began. The first few strokes all went well with fine shavings emerging as the tool came through the pulley, but as the tool reached the full width of cut there was a bang and the tool bit cracked! **photo 10**. After manually cranking

the machine to move the tool from the pulley it revealed a dig in. I had forgotten about the clapper, it then dawned on me that most pictures on the internet show keyway cutting upwards rather than downwards. The tool had been riding up slightly on each stroke allowed by the clapper until the tool pulled in. As the Alba has no locking mechanism on the clapper I decided to turn everything upside down and cut upwards. The biggest problem with this was aligning the

part started keyway.

I realised that I had in fact put too much front rake on the tool and rather than try to salvage the broken one I decided to start again, this time with less rake. Second time lucky, all went well with nice rolls of swarf emerging from the end of the pulley with every stroke, **photo 11**, I found that by allowing three strokes for every small increase in the depth of cut, each pass produced swarf as the tool flexed. ■



The finished keyway, not bad for first attempt.

13



The original lantern post and the new adapter with the cutting tool in the centre.

MODEL ENGINEER

NEXT ISSUE NEXT ISSUE NEXT ISSUE NEXT ISSUE
NEXT ISSUE NEXT ISSUE NEXT ISSUE NEXT ISSUE
NEXT ISSUE NEXT ISSUE NEXT ISSUE NEXT ISSUE

NEXT ISSUE

Wakefield

John Arrowsmith visits the Wakefield Society of Model and Experimental Engineers.

Lubrication

Rhys Owen looks at the phenomenon of friction and explores the various approaches to locomotive lubrication.

Rotary Broaching

Jacques Maurel explains how rotary broaching is used to create polygonal holes.

Is it a fake?

Noel Shelley wonders what distinguishes a replica from a fake.

Content may be subject to change.



ON SALE 21 MAY 2021

BEGINNERS WORKSHOP

These articles by Geometer (Ian Bradley) were written about half a century ago. While they contain much good advice, they also contain references to things that are out of date or describe practices or materials that we would not use today either because much better ways are available or for safety reasons. These articles are offered for their historic interest and because they may inspire more modern approaches as well as reminding us how our hobby was practiced in the past.

Special files and shapes

GEOMETER writes on the application of non-standard shaped files for metal and wood working

AS EXPERIENCE IS gained in using files, it is soon discovered that there are occasions when the ordinary varieties are unsuitable because of their size or shape. **ALSO**, it is apparent there are forms which it is virtually impossible to produce with precision by mere unguided filing.

Happily, however, there are available at the present time numerous special types of files to meet unusual situations and some of the more common geometrical shapes, one-off or repetitional, can be produced with reasonable ease by the use of simple jigs and templates.

Special files

Ordinary files are not well adapted to curved bores such as may be encountered in making a model engine or doing a little home tuning to motorcycle or car, when it is required to reduce sharp corners in ports and smooth the interior of manifolds, where the riffler file (A) is useful.

It is double-ended, as shown, with curved tooth surfaces and made in a variety of sections—round, oval, rectangular, D-section, etc. No particular skill is required in its use, it is only necessary to ensure that any adjacent seating surface is not damaged in the process.

The rotary file (B) is employed in model engineering, toolmaking, die-sinking and in circumstances where, for any reason, machining is not admissible. It is used in an electric drilling machine, or driven from a flexible shaft, the shank being round to grip in a chuck. Again, there are various sections and generally two cuts at least, coarse and fine.

Common sections are round (ball) round parallel, barrel shape and tapered. Some of the larger rotary files may be screwed on shanks.

Rotary files

Use of rotary files to produce the desired results demands practice and manipulative skill, since the rapidly-revolving tool tends to drag itself along a surface, so the drill or flexible-shaft head must be held firmly, yet at the same time moved to produce the

required contour. Particularly to be guarded against are involuntary movements when a cut is almost completed and resistance is suddenly reduced, for then the tool may jump and cut an unwanted hollow before the corrective movement can be applied.

Needle files, of which C depicts an example, are the smallest sections produced, generally for working in very small slits or apertures. The shanks are generally circular, though the files are intended for use by hand. As with larger files, there are numerous different sections.

A lever! link or connecting rod usually finishes with a rounded end or boss and when precision is required,

Some of the many shapes of files used for special work. Their application is described in the text

the component is produced by milling or grinding on a jig or rotary table. Very good results, however, can be achieved by filing, using as a guide a washer, or a disc of metal from a bar.

When a radius is required at a corner (D), the washer can be located flush with the side and end of the work and the two clamped in the vice, surplus material sawn off and the radius carefully filed to fit the washer.

To produce a nicely-rounded end on a connecting rod (E), the bore should be finished (as by drilling and reaming), then a pair of washers of similar bore and required outside diameter placed one each side on a close-fitting rod, which is just short of the total length, so washers and con-rod can be gripped in the vice.

For one-off work, steel washers need not be hardened though they should be case-hardened for continuous use or better, made in steel such as cast steel, which can be hardened outright by heating to red and cooling in water.

Use of templates

A template considerably facilitates working where the same feature has to be repeated a number of times. Depending on the use to which it is to be subjected, a template can be in mild steel, unhardened, case-hardened, or in cast steel, hardened and tempered.


The material need be no thicker than that necessary not to bend or deflect easily in use, having regard to the size. Using a template, it is necessary, of course, to file squarely.

To produce a ratchet quadrant (F), the template has a locating hole and a vee-nick of the required size, moved round the work in filing each tooth-in which way small saws and cutters can be produced.

Filing slotted joints

Slotted dovetail joints for a wood box (G), can be filed from a metal template, long enough to embrace width, or moved for the necessary number of tongues and grooves.

Small numbers of special armature laminations for a motor or dynamo can also be filed from a suitable template, (H), in this case swinging round to the required angular positions.

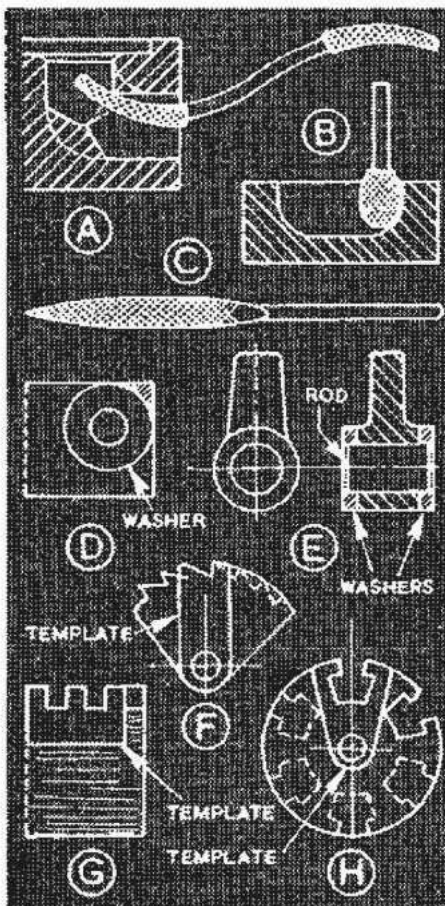

NEWTON TESLA**SMOOTH, QUIET, HIGH PERFORMANCE VARIABLE SPEED
CONTROL FOR LATHES AND MILLING MACHINES****Supplier to industry since 1987 of high power speed control systems from 100W to 2,200,000W,****MITSUBISHI INVERTERS from £122 inc VAT****HIGH PERFORMANCE INVERTERS**

For serious machining duty.
240V 1-phase input, 220V 3-phase output, for you to run a dual voltage (Delta wired) three phase motor off your 1-phase supply.
Six sizes from 0.1kW (0.12hp) to 2.2kW(3hp).
Built-in user keypad, display and Speed Dial.
Unique Integrated Emergency Stop Function.
Advanced Torque Vector control for optimum performance. High Reliability.

Fully CE Marked and RoSH Compliant.
Compatible with our Remote Control station Pendants.
Supplied pre-programmed at no extra cost.

REMOTE CONTROL STATIONS from £66 inc VAT

Remote control station Pendants suitable for use with all our Mitsubishi Electric and IMO iDrive Inverters. Industrial grade push buttons and controls. Featuring START, STOP, FORWARD, REVERSE, RUN/JOG, & Variable Speed potentiometer. 3-wire control - Behaves like a No-Volt-Release. Beware of low quality copies of our original tried and tested controls.

Fitted with 2-metre length of control cable ready for connection to drive, and supplied with wiring diagram.

**VARIABLE SPEED CONTROL PACKAGES****The 'original' & best lathe speed control system.**

Pre-wired systems, and Inverter, Motor, Remote packages available to suit wide a range of metal and wood turning lathes, including; **MYFORD ML7**, Super 7, **BOXFORD**, & **RAGLAN** lathes, Wood turning lathes including; ML8 and MYSTRO and **UNION GRADUATE**. Pre-wired ready to go! Power Range: 1/2hp, 1hp, 2hp and 3hp. Super smooth control across entire speed range, giving chatter free machining and excellent finish unattainable with 1PH motors! Powered from domestic 240V Single Phase mains supply. Made in the UK, ISO9001:2008 Quality Assured.



**Our Pre-wired Lathe Speed
Controllers are now covered by a
10-Year Warranty**

Newton Tesla (Electric Drives) Ltd,
Warrington Business Park, Long Lane, Warrington,
Cheshire WA2 8TX, Tel: 01925 444773 Fax: 01925 241477
E-mail: info@newton-tesla.com
Visit www.lathespeedcontrol.com for more information.



THE MULTI METALS SHOP

The Multi Metals Shop, all your metal requirements in one place, we have over 3000 items in stock ready for quick dispatch, with FREE delivery on all orders.

Check out our webshop www.themultimetalsshop.co.uk

Alternatively call us on **01143493625** or email sales@themultimetalsshop.co.uk
Unit 7 Newhall Industrial Estate, Sanderson Street, S9 2TW

AMAZING SAVINGS!

6 issues for £20



Saving **42%**



Saving **30%**



Saving **37%**




Saving **33%**



Saving **33%**



Saving **41%**



Saving **40%**



Saving **37%**



Saving **33%**



Saving **33%**



Saving **28%**



Saving **33%**

SUBSCRIBE SECURELY ONLINE:

WWW.MYTIMEMEDIA.CO.UK/6FOR20

CALL **0344 243 9023**** AND QUOTE **6FOR20**

TERMS & CONDITIONS: Offer ends 31st December 2021. *UK print subscriptions offer only. Subscriptions will begin with the next available issue.

MyTime Media collects your data so that we can fulfil your subscription. We may also, from time to time, send you details of MyTime Media offers, events and competitions but you always have a choice and can opt out by emailing us at unsubscribe@mytimemedia.com

We do not share or sell your data with/to third parties. Details you share with us will be managed as outlined in our Privacy Policy here <http://www.mytimemedia.co.uk/privacy-policy>.

Please visit www.mytimemedia.co.uk/terms for full terms & conditions.

**Calls are charged at the same rate as standard UK landlines and are included as part of any inclusive or free minutes allowances. There are no additional charges with this number. Overseas calls will cost more.

Mini Lathe Spindle Improvements and Modifications



Part 1. Spindle extension. Mike Cox commences a series of three related articles on spindle modifications for the popular Mini Lathes with this spindle extension.



The gear cover on a minilathe. The end of the spindle is inside the cover.



The rear of the spindle is directly over the change gears.

The Asian mini-lathes that are sold in the UK all have a design flaw. The lathe spindle does not extend out the back of the cover enclosing the change gears, **photo 1**. A consequence of this is that any swarf or metal dust that migrate along the spindle bore then falls onto the change gears immediately below the spindle, **photo 2**. The amount of swarf migrating along the spindle during normal turning of the out diameter of components is usually very small but if the lathe is used for through boring of a component then a large amount of swarf and metal particles travel back along the spindle and drop onto the change gears.

When I first came across this problem, I made an extended bottle brush, **photo 3**, that I could push through the bore between passes to clear the spindle of debris. This was not very effective until the hole being bored was at least as large as the spindle bore. In fact whilst the bore was small using the brush

tended remove most of the swarf as it was withdrawn depositing it over the change gears!! The extended brush is not totally useless and I use it to clean the bore and the chuck at the end of any turning session.

The obvious solution to the swarf problem was to replace the outer most lock nut on the back of the spindle with a purpose made threaded spindle extension, as shown in **photo 4**. The grooves on the side closest to the spindle are so the extension can be tightened on the spindle with a C spanner.

The spindle extension

The spindle extension, **fig. 1**, was made from a length of 50mm free cutting mild steel. A 38mm length was cut off and mounted in the external jaws of the lathe chuck. The end was faced, centre drilled, and then drilled out to 13mm using successively larger drills. The end of the piece was turned down to 27mm

diameter for a length of 20mm. All edges were then chamfered.

The piece was turned round in the chuck so that it was gripped by the 27mm end and faced to a good finish. The outside was turned down to 45mm diameter. Using a 10mm boring tool, **photo 5** the 13mm bore was opened out to 20mm for the whole length. The bore was then enlarged to 25.5mm for a distance of 11mm from the end. The final operation before threading was to undercut the bottom of the 25.5mm bore to 27mm for a distance of 2.5mm to provide a run out groove for threading.

The 25.5mm bored section was then single point threaded to give an M27 x 1.5mm thread using a 60 degree threading tool, **photo 6**. I have a 1.5mm pitch metric leadscrew on my mini-lathe so any gears providing a 1 to 1 ratio between the spindle and leadscrew are good for this operation. I used the gear combination 20, 65, 20. The threading was done using small cuts and using

a spindle handle rather than under power. Doing it this way it is easy to feel when the tool reaches the run out groove. Threading was continued until the tip of the tool had been advanced 0.65mm into the steel. At this point the extension piece was marked with a felt tip pen where it met jaw No 1 of the three jaw lathe chuck. It was then removed from the chuck.

The outer ring nut was removed from the spindle and the new extension was screwed on. If the fit had been tight at this stage, then the extension could have been removed and replaced in the chuck so that the mark lined up with the No 1 jaw and a further light cut taken. Throughout the



The modified bottle brush.




The rear spindle extension.

threading and testing the leadscrew half nuts were kept closed.

Once the fit was acceptable the positions of the four C spanner grooves were marked out, and the grooves were cut using my X1L mill. An alternative to the C spanner slots would have been to drill four 6mm holes through the rear projection, close to the shoulder, so that a tommy bar could be used for tightening.

The rear extension can now be screwed onto the spindle instead of the second ring nut and it should be tightened to lock against the first ring nut. Check that the spindle turns freely and that there is no axial or radial play in the spindle. If there is then loosen the extension and tighten the first ring nut to eliminate any play and then relock the extension to the ring nut. The ring nut must not be over tightened as this will cause excessive heat generation in the bearing.

The final step in the project was to

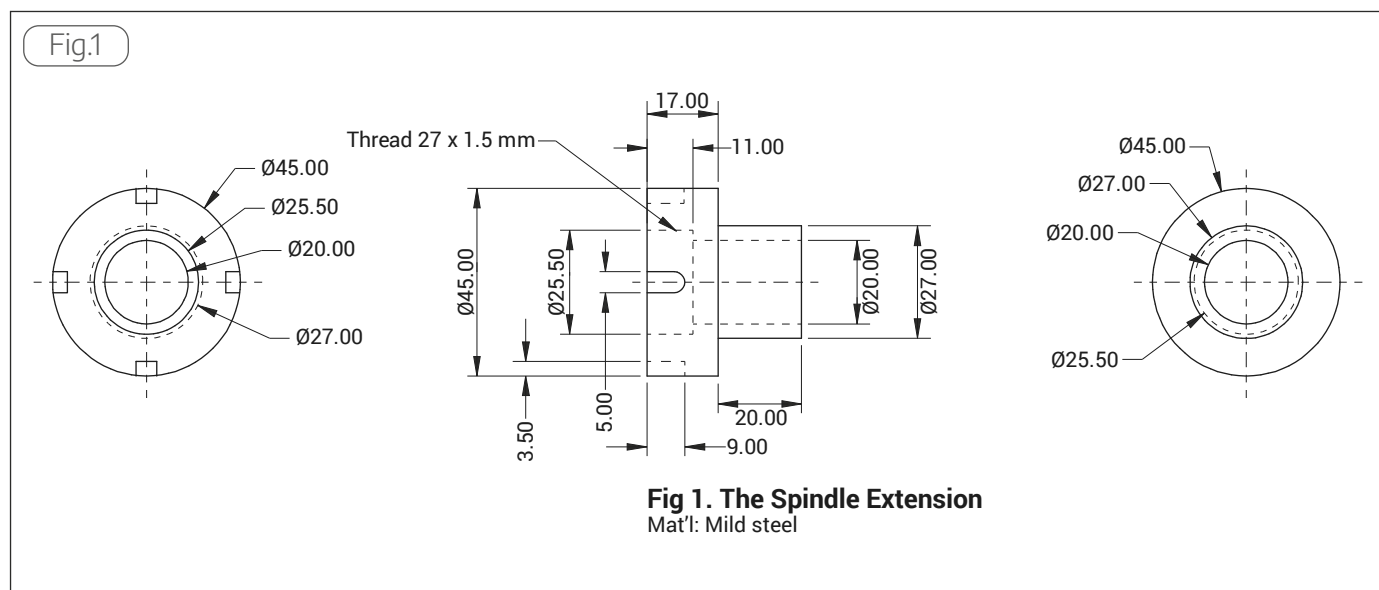



The boring bar.



The 60 degree threading tool.

I did this the hard way using a half round file and abrasive paper because I had no alternative at the time. Step drills are cheap and readily available, and this would be a much easier way to enlarge the hole.


enlarge the hole in the change gear cover so that the extension protrudes through it. I did this the hard way using a half round file and abrasive paper because I had no alternative at the time. Step drills are cheap and readily available, and this would be a much easier way to enlarge the hole.

Fixing the change gear cover

I found the standard long M4 socket head allen screws that secure the cover very frustrating. Firstly, when ever I wanted to remove or replace the cover, I had to find the correct allen key. Secondly, the screws were a pain to get started in the holes on the headstock. To solve both these problems I replaced the screws with small studs in the headstock and then screwed a 32mm of 10mm hex bar that had been drilled and tapped M5, **photo 7**. I cut away some of the material inside the change gear cover, **photo 8**, so that it would fit over the hex bars and then secured the cover in place with small M5 knurled screws. This makes removing and replacing the cover much easier. ■



The threaded hex bars screwed to the headstock.

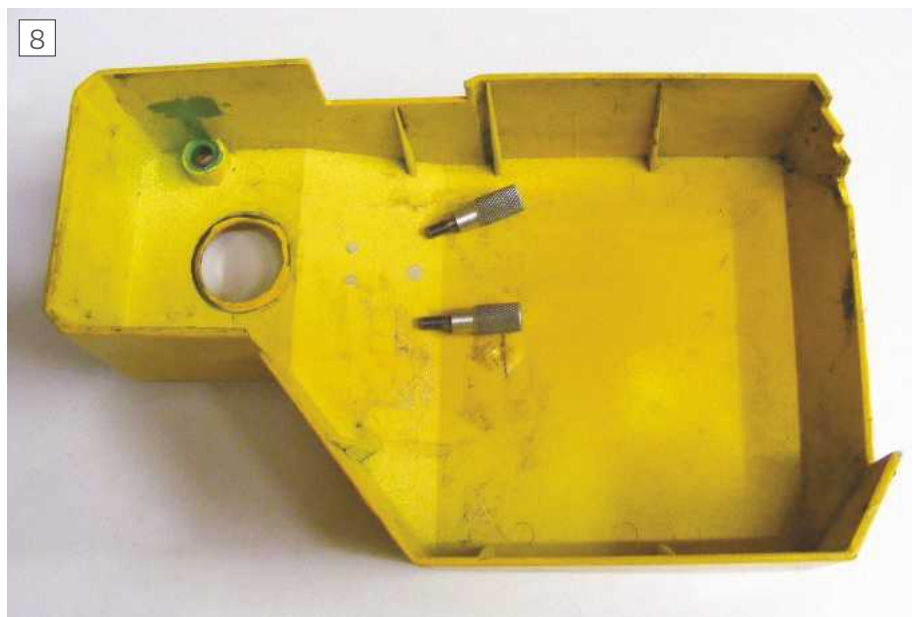

The cover after modifications. Note the knurled attachment screws inside the cover.

Introducing Drilling Machines

After a lathe, a bench drilling machine is probably the commonest machine in most workshops.

Although many small milling machines are sold as 'mill drills', they are rarely as convenient in use as a true drilling machine. Given that the cost of a basic bench drill is a fraction of that of a milling machine, many users feel it makes sense to have both machines in the workshop.

A typical entry-level drill press, such as the Warco Hobby Drill, **photo 1**, will have five speeds. Speeds are changed by loosening a screw on the motor mount and moving a belt up or down a stack of pulleys – this takes about a minute. It has a no-volt release emergency stop and has an adjustable cast iron table. The Hobby Drill comes with a keyed chuck with a capacity from small drills up to 13mm ($\frac{1}{2}$ ").

Industrial quality drill presses are typically much larger and have more powerful motors. The Clarke CDP302B is an example, **photo 2**. It has sixteen speed belt drive and a heavy table which can be raised using a rack and pinion system. It comes with a 16mm keyed chuck and has an MT2 spindle which allows the user to easily change to a smaller chuck or to use larger drills and reamers with taper shanks.

Even larger pillar drills are available, usually as floor-standing machines which are useful if you would rather not give up an area of bench space to a drill press.

Chucks

Unlike the chucks on hand-held power drills, which screw on, those on drill presses usually use a taper such as B16, either on the end of the spindle or on a morse taper arbor. The usual way of fitting these is to assemble them by hand, then lower the fully open chuck against a block of



Warco's Hobby Drill is an entry level drill press.

wood on the mill table. Firm pressure applied with the feed lever should then be enough to ensure the chuck is securely fitted.

The commonest style of chuck is the 'Jacobs' type which uses a separate key for tightening and loosening, but you can also get good quality keyless chucks, **photo 3**. If you have a small drill press you should be aware that keyless chucks can be much longer and might restrict the 'headroom' you have for longer drills.

Drills

You might be surprised how many different choices there are when it comes to drills! The basic morse twist drills used for metalworking usually have a 118-degree angle at the tip and curved flutes. As well as metric (millimetre) and imperial (fractional inch) sizes, you can also get 'number' and 'letter' drills in closely spaced sizes. You may find these number and letter sizes on older plans, they can usually be satisfactorily substituted for using a metric drill chosen to the nearest 0.1mm.

Usually you will find drills with a curved surface behind the cutting edges, but two other types are often found. Four-facet and six-facet drills are very effective and preferred by some users, they are also easier to sharpen freehand. Split-point drills are good at starting holes (large drills of other styles are best used to follow a smaller pilot hole) but quite difficult to regrind.

Specialist styles of drill include short 'spotting drills' with a more pointed end, used for setting out holes on a workpiece and centre drills for putting a 60-degree conical hole in the end of lathework to allow it to be held between centres. You may also come across 'slow spiral' or straight flute drills, these are ideal for drilling sheet material as they are less likely to grab or distort it.

Most drills are HSS, but if you have a lot of holes the same size to drill in



This large Clarke bench drill has sixteen speeds and an MT2 spindle.



Not to be confused with cheap plastic-bodied types, good quality keyless chucks hold drills securely and are quick to use.

tough materials, you might consider investing in a solid tungsten carbide drill. Good advice for beginners is to buy a 'mid range' set of drills to cover their immediate requirements and as they wear out or break the most used drills, replace them with better quality items.

Reamers

Reamers are special drill-like tools which are used to give an accurate size to a previously drilled hole, for example where you need an accurately sized pin or shaft to have a particular type of fit. Reamers should be run at about half the speed you would use for a drill of the same diameter, and the previously drilled hole should not be too close to the final size – reamers need to be able to take a modest cut or they will blunt rapidly.



This set of number drills comes in a combined box and holder.


Lubrication

It is almost always a good idea to use some form of cutting fluid or oil when drilling. Although in industry floods of coolant are the norm, simply brushing a little neat cutting oil on a drill or reamer will make a big difference, reducing the pressure required and improving the finish of the final hole.

Drill safety

Although drill presses are relatively simple in principle, there are a few things to bear in mind to ensure safety and that you get the best results:

- Drill presses are generally rather top-heavy, so they MUST be securely attached to the bench. Usually a pair of M10 screws with washers to spread the load are more than adequate.
- Always hold work in a drill vice or clamp it to the drill table; even a small item that grabs and spins in your fingers can cause unpleasant injuries.
- When drilling all but the smallest work drill vices should be clamped to the table.
- Always use the guard – its job is to stop flying swarf.
- Use a bent metal rod to pull swarf clear of the drill, never use your fingers
- Never wear gloves when using a drill press, they can get pulled off if caught by a drill. ■

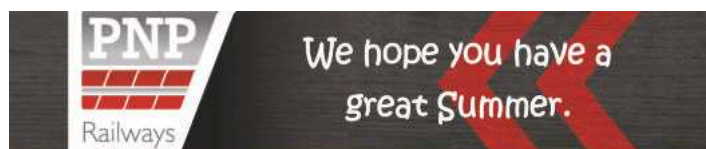

**Precision Made Parts for the
Model, Miniature and Garden Railway Engineer.
Friendly Expert Advice. Speedy Delivery.**

01453 833388 shop@pnp-railways.co.uk

www.pnp-railways.co.uk



MADE IN
THE UK



WORLDWIDE
DELIVERY

Follow us on:



Hand powered metalforming tools
Handy for so many jobs

Punching		Cutting	
Riveting		Bending	
Rolling		Scrolling	
Also suppliers of a wide range of steel, fixings, clock components & much more.			Twisting

Call today for your free catalogue and if you quote our promo code* MMENGW21, we will send you our demonstration DVD free of charge.

J & C R Wood Ltd, Dept MMENGW21, 66 Clough Road, HULL HU5 1SR
Tel: 01482 345067 Email: info@janderwood.co.uk
OR Visit our on-line store at
www.metal-craft.co.uk

Engineers' Cabinets

Tel 07534 458664 or email mark@cassey.co.uk

- * Brand new and Hand made in the UK (Lincolnshire)
- * Solid English Oak locally sourced (no veneers)
- * Grain of oak "wraps" around the cabinet (i.e. a single board is used for the carcass, where the start of the new side has a continuation of grain pattern from that of the previous side).
- * Drawer fronts are all from a single board, so the grain pattern "flows" across the front of all drawers
- * Made to exacting standards
- * Fashioned on the iconic Moore & Wright cabinet
- * Size 17" x 8.25" x 11.375" (430x210x290mm) approx
- * Bespoke commission undertaken to your dimensions

I currently make two styles, a 5 full width drawer cabinet for £550.00 and a 7 drawer cabinet at £600. Delivery at cost or collection welcomed. Cost of bespoke cabinets depending on size and details.



SUBSCRIBE

To **Old Glory** or **Stationary Engine** and
get your first 6 issues for just **£12***

WHEN YOU PAY BY DIRECT DEBIT



If you love the spectacle of immaculately-restored old machinery, or are fascinated by Britain's rich industrial and transport heritage, *Old Glory* is the magazine for you!



The collection, restoration and study of stationary engines is a hugely popular hobby, brought alive each month by the experts at *Stationary Engine* magazine.

SUBSCRIBE ONLINE AT:

shop.kelsey.co.uk/SECON21 (Stationary Engine)

Shop.kelsey.co.uk/OGCON21 (Old Glory)

Or call **01959 543 747** and quote code **OGCON21** (Old Glory)
or **SECON21** (Stationary Engine)

Lines are open Mon- Fri, 8.30 am – 5.30 pm. Calls charged at your standard network rate.

This is a direct debit offer. After the initial term, the six monthly rate will increase to £20 every six months (Stationary Engine) and £21 every six months (Old Glory). Offer ends 31.7.21. UK print subscriptions only. For digital subscriptions and overseas rates, please visit shop.kelsey.co.uk. Subscriptions will begin with the next available issue. At Kelsey Publishing, we take your privacy seriously and will only use your personal information to administer your account and provide the products and services you have requested. We will only contact you about our special offers via the preferences you have indicated, and you can update these at any time by emailing subs@kelsey.co.uk or calling us on 01959 543 747.

Cutting Oils



Our New Zealand correspondent, Peter King, gets some thoughts about coolants and cutting oils off his chest.

I have observed that many correspondents to 'Model Engineer's Workshop' regard "suds", "cutting oils" etc as the same thing and use these terms interchangeably. They are not the same thing but are both coolants.

'Suds' originated as a mix of ordinary soap and water about 200+ years ago, and this was a very early aid to turners. Water, being very good at taking up heat, cooled the 'Carbon Steel' cutters they used and prolonged their use before they failed due to loss of 'temper'. The blend, because of the soap being made from fat and lye, to a degree blended with the water, cooled tool and job and 'eased' the passage of the chips over the tooling and also left a greasy coating on the work and prolonged the period to the onset of corrosion (rust) on the 'super-clean' machined surfaces. This can be 'home-made' – I do not recommend it, as it does not take very long before it smells very bad!

Modern 'suds', is a mixture of a special formulation of oils (and a modicum of bactericide – hence the clinical 'smell') with clean water. It is not 'soluble' (despite the common name for it), the oil disperses as minute 'globules' of oil in the water and gives a 'milky' appearance to the mix. Once again the water cools the tooling and the job and the oil eases the passage of the chips over the tool. It also, again, coats the super-clean machined surfaces and - much more than soap – defers the onset of corrosion (rust) by preventing access of oxygen to those surfaces. A further advantage is that the water soon evaporates and it leaves a trace of oil on the surfaces of the machine tool. The formulation is cheap. Soluble oil on its own, burns due to the heat of machining and smells rather nasty and does not cool work or tool. The only place I have ever used it 'straight' is hand tapping when I ran out of formulated 'tapping lubricant' - it does a reasonable job.

"Cutting oils" do not have any water and are formulated firstly to penetrate easily to the tooling's cutting edges to ease the passage of chips and reduce, if not eliminate, build-up of some alloys on tool tips, and secondly to carry away the



Even a relatively small drill can benefit from a constant flow of suds.

heat of machining – lastly, again to coat the work surfaces to prevent corrosion. It is intended to be used as a flood not a drip. The formulations are not cheap.

"Cutting solutions" do not usually have any oils and are a melange of chemicals, often in a water solution and do the same as above. The formulations – there are lots – are very 'not cheap' and are often only sold in large containers, like 44 gallon drums. They are primarily used for rapid automated mass production.

All of the above are intended to be used as a flood over the work, not as a sparing drip. Yes, you will get it on you from the spray thrown off – that is why the turners wore overalls and are to be seen sometimes in old photographs wearing a sort of bib over them! My larger lathe delivers between about 1 and 5 litres per minute and my mills each maintain between 2 and 5 litres - partly also this is to wash chips away and prevent 're-cut'.

If you use "air / solution" spray application on your work – which

relies on the 'air' to cool the work (inefficiently) and you want to live longer, then acquire breathing 'filter masks' as the last three formulations mentioned above, when ingested into your lungs from the air will not improve your longevity! It is difficult to acquire oxygen if your lungs have a coating from oil mist designed and formulated to prevent it. The last two in particular have some chemical combinations that will not be appreciated by your lungs.

Examination of photographs of 'turned' items provided by some correspondents clearly show who uses adequate coolant – nice clean bright finishes close to a ground finish (right cutting speed, right feed, right tool, right depth of cut, adequate coolant) there being no evidence on the work of 'build-up' on tooling. Then there is the work that looks – as my tutor (Father- an AMIMEchE) a long time ago, described as "hacked out with a half round bastard file" (all wrong and with great scars from 'build-up' on tooling). ■

Model Engineers' Workshop Data Book

MODEL ENGINEERS' WORKSHOP DATA BOOK

THICK- NESS mm	BENDING ALLOWANCE--METRIC SIZES															
	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.3	12.9	14.5	16.0	16.1	16.1
0.5	1.9	3.5	5.0	6.6	8.2	9.7	11.3	12.9	14.5	16.0	16.0	16.1	16.1	16.1	16.2	16.3
0.6	1.9	3.5	5.1	6.7	8.2	9.8	11.4	12.9	14.5	16.1	16.0	16.1	16.1	16.1	16.2	16.3
0.7	2.0	3.6	5.2	6.7	8.3	9.9	11.4	13.0	14.6	16.1	16.0	16.1	16.1	16.1	16.2	16.3
0.8	2.1	3.6	5.2	6.8	8.4	9.9	11.5	13.1	14.6	16.2	16.0	16.1	16.1	16.1	16.2	16.3
0.9	2.1	3.7	5.3	6.8	8.4	10.0	11.6	13.1	14.7	16.3	16.0	16.1	16.1	16.1	16.2	16.3
1.0	2.2	3.8	5.3	6.9	8.5	10.1	11.6	13.2	14.8	16.3	16.0	16.1	16.1	16.1	16.2	16.3
1.1	3.8	5.4	7.0	8.5	10.1	11.7	13.3	14.8	16.4	16.3	16.0	16.1	16.1	16.1	16.2	16.3
1.2	3.9	5.5	7.0	8.6	10.2	11.7	13.3	14.9	16.5	16.4	16.0	16.1	16.1	16.1	16.2	16.3
1.3	4.0	5.5	7.1	8.7	10.2	11.8	13.4	15.0	16.5	16.5	16.0	16.1	16.1	16.1	16.2	16.3
1.4	4.1	5.7	7.2	8.8	10.4	11.9	13.5	15.1	16.7	16.7	16.0	16.1	16.1	16.1	16.2	16.3
1.5	4.1	5.7	7.2	8.8	10.4	11.9	13.5	15.1	16.7	16.7	16.0	16.1	16.1	16.1	16.2	16.3
1.6	4.1	5.7	7.3	8.9	10.4	12.0	13.6	15.1	16.7	16.7	16.0	16.1	16.1	16.1	16.2	16.3
1.7	4.2	5.8	7.4	8.9	10.5	12.1	13.6	15.2	16.7	16.7	16.0	16.1	16.1	16.1	16.2	16.3
1.8	4.3	5.8	7.4	9.0	10.6	12.1	13.7	15.3	16.8	16.8	16.0	16.1	16.1	16.1	16.2	16.3
1.9	4.3	5.9	7.5	9.0	10.6	12.2	13.8	15.3	16.8	16.8	16.0	16.1	16.1	16.1	16.2	16.3
2.0	4.4	6.0	7.5	9.1	10.7	12.3	13.8	15.4	17.0	17.0	16.0	16.1	16.1	16.1	16.2	16.3
2.1	6.0	7.6	9.2	10.7	12.3	13.9	15.5	17.0	17.0	17.0	16.0	16.1	16.1	16.1	16.2	16.3
2.2	6.1	7.7	9.2	10.8	12.4	14.0	15.6	17.1	17.1	17.1	16.0	16.1	16.1	16.1	16.2	16.3
2.3	6.2	7.7	9.3	10.9	12.4	14.0	15.6	17.2	17.2	17.2	16.0	16.1	16.1	16.1	16.2	16.3
2.4	6.2	7.7	9.3	10.9	12.5	14.1	15.6	17.2	17.2	17.2	16.0	16.1	16.1	16.1	16.2	16.3

MODEL ENGINEERS' WORKSHOP DATA BOOK

DRILL SIZES		DECIMAL SIZES	
METRIC	INCH	METRIC	INCH
24.75		24.750	0.9744
25.00		25.000	0.9843
	63/64	25.003	0.9844
25.25		25.250	0.9941
	1.00	25.400	1.0000

BEYOND THIS SIZE, METRIC DRILLS ARE LISTED AS FOLLOWS.

0.25mm INCREMENTS UP TO 32mm
0.50mm INCREMENTS UP TO 51mm AND
1.00mm INCREMENTS UP TO 100mm.

INCH SIZE DRILLS ARE LISTED AS FOLLOWS

1/64in. INCREMENTS UP TO 2in.
1/32in. INCREMENTS UP TO 3-1/2in. AND
1/16in. INCREMENTS UP TO 4in.

READERS NOTES.

NOTES

The material in any bend will be under tension in the outer part, whilst in the inner part it will be under compression. The position of the neutral axis (path of no change in length) will depend on the relative strengths of the material under compression and tension.


The bend allowances given in the following tables are based on the neutral axis being at a position of 0.4 times the material thickness and nearest the inside. Bend allowance C therefore equals, for 90 degree bend.

$$C = \frac{\pi \times 2 \times (0.4t + R)}{4} = 1.57(0.4t + R)$$

R = Inside bend radius.

The value of 0.4 should prove adequate for most materials. However, in critical applications a trial should be carried out on a test sample.

Length of material = A + B + C

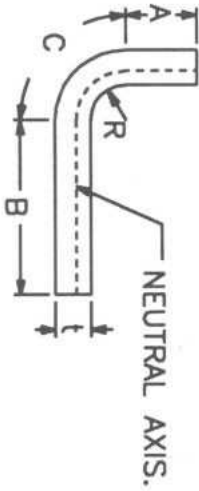

For bends other than 90 degrees

$$\text{allowance} = \frac{C \times \theta}{90}$$

Where C = allowance as per tables.

θ = angle of bend.


THICK- NESS mm	RADIUS mm									
	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0
2.5			6.3	7.9	9.4	11.0	12.6	14.1	15.7	17.3
2.6			6.3	7.9	9.5	11.1	12.6	14.2	15.8	17.3
2.7			6.4	8.0	9.6	11.1	12.7	14.3	15.8	17.4
2.8			6.5	8.0	9.6	11.2	12.8	14.3	15.9	17.5
2.9			6.5	8.1	9.7	11.2	12.8	14.4	16.0	17.5
3.0			6.6	8.2	9.7	11.3	12.9	14.5	16.0	17.6
3.5				8.5	10.1	11.6	13.2	14.8	16.3	17.9
4.0				8.8	10.4	11.9	13.5	15.1	16.7	18.2
4.5					10.7	12.3	13.8	15.4	17.0	18.5
5.0					11.0	12.6	14.1	15.7	17.3	18.8
5.5						12.9	14.5	16.0	17.6	19.2
6.0						13.2	14.8	16.3	17.9	19.5
6.5							15.1	16.7	18.2	19.8

MODEL ENGINEERS' WORKSHOP DATA BOOK C27

FOR LEADSCREW HAVING FOUR THREADS PER INCH

BENDING ALLOWANCE--IMPERIAL SIZES									
RADIUS in.									
THICKNESS	in.	0.032	0.063	0.094	0.125	0.157	0.187	0.219	0.250
1/32"	0.12	0.17	0.22	0.27	0.31	0.36	0.41	0.46	0.51
1/16"	0.14	0.19	0.24	0.29	0.33	0.38	0.43	0.48	0.53
3/32"	0.21	0.26	0.31	0.35	0.40	0.45	0.50	0.55	0.60
1/8"	0.27	0.33	0.39	0.44	0.49	0.54	0.59	0.64	0.69
5/32"	0.35	0.41	0.47	0.53	0.59	0.65	0.71	0.77	0.82
3/16"	0.41	0.48	0.55	0.62	0.69	0.76	0.83	0.90	0.97
7/32"	0.48	0.56	0.64	0.72	0.80	0.88	0.96	1.04	1.12
1/4"	0.55	0.64	0.73	0.82	0.91	1.00	1.09	1.18	1.27
5/16"	0.62	0.72	0.82	0.92	1.02	1.12	1.22	1.32	1.42
3/8"	0.82	0.93	1.04	1.15	1.26	1.37	1.48	1.59	1.70

THREADS PER INCH	FIRST STUD		SECOND STUD		LEAD-SCREW
	DRIVEN	DRIVER	DRIVEN	DRIVER	
22	55	30	idler	idler	60
24	60	40	idler	idler	80
25	50	40	idler	idler	100
26	65	30	idler	idler	60
27	60	40	idler	idler	90
28	70	40	idler	idler	80
30	60	40	idler	idler	100
32	60	30	idler	idler	80
33	55	40	60	35	70
34	85	40	idler	idler	100
35	70	40	idler	idler	100
36	60	30	idler	idler	90
38	95	40	idler	idler	100
39	60	40	65	35	70
40	80	40	idler	idler	100
42	60	40	50	25	70
44	55	35	70	40	80
45	45	40	60	30	100
48	60	25	idler	idler	100
50	75	20	idler	idler	100
56	70	25	idler	idler	100
60	60	30	75	40	80

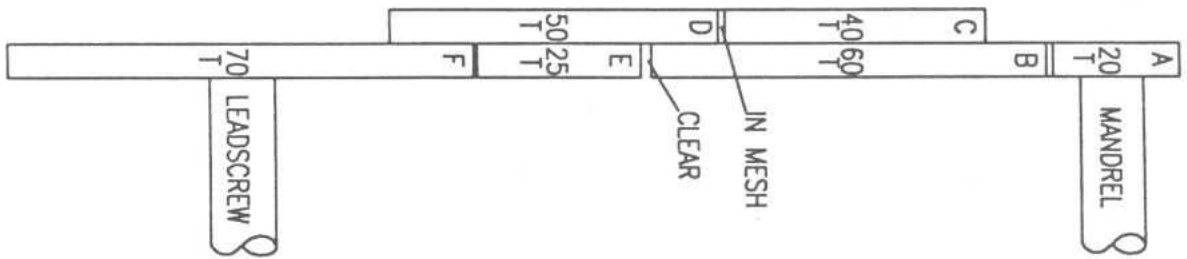

SCREW CUTTING ON THE LATHE
CHANGEWHEEL COMBINATIONS

Notes

The combinations listed on the following pages have been proven to be mathematically correct. Their acceptability on any machine will depend on the machine in question. Most obvious potential

problem is insufficient changeheels available, due to them not being included in those supplied initially, or having been subsequently lost. Just possibly, though

unlikely, is that if wheels listed are too large, the resultant centre distance between gears may make fitting them to the quadrant impossible. The larger diameter may also make them foul some part of the machine, typically the changeheel cover.

The combinations given in the lists are in no way exclusive, others can be used to suit the wheels available. Even so, combinations that are mathematically correct may present problems in fitting.

In the example on the left the 1:3 ratio of the mandrel (20) to first stud driven (60) could be replaced with 30 and 90 tooth wheels as neither are being used elsewhere. On examination this will not work as the sum of the teeth on gears C and D (90) would not be greater than the sum of B and E (115) thus eliminating the essential clearance between B and E.

However, if the 40 and 50 tooth gears were replaced by 80 and 100, an acceptable gear chain would result. From this it can be seen that other combinations can arrive at the same result. If therefore gears are not available for the quoted arrangement, do look for other possibilities.

SET UP FOR CUTTING
42 THREADS PER INCH
WITH 4 THREADS PER
INCH LEAD SCREW.
SEE TABLE.

BENDING ALLOWANCE--SWG

THICKNESS		RADIUS in.									
SWG	in.	0.032 1/32"	0.063 1/16"	0.094 3/32"	0.125 1/8"	0.157 5/32"	0.187 3/16"	0.219 7/32"	0.250 1/4"	0.312 5/16"	0.375 3/8"
22	0.028	0.07	0.12	0.16	0.21	0.26	0.31	0.36	0.41	0.51	0.61
21	0.032	0.07	0.12	0.17	0.22	0.27	0.31	0.36	0.41	0.51	0.61
20	0.036		0.12	0.17	0.22	0.27	0.32	0.37	0.42	0.51	0.61
19	0.040		0.12	0.17	0.22	0.27	0.32	0.37	0.42	0.52	0.61
18	0.048		0.13	0.18	0.23	0.28	0.32	0.37	0.42	0.52	0.62
17	0.056		0.13	0.18	0.23	0.28	0.33	0.38	0.43	0.53	0.62
16	0.064		0.14	0.19	0.24	0.29	0.33	0.38	0.43	0.53	0.63
15	0.072			0.19	0.24	0.29	0.34	0.39	0.44	0.54	0.63
14	0.080			0.20	0.25	0.30	0.34	0.39	0.44	0.54	0.64
13	0.092			0.20	0.25	0.30	0.35	0.40	0.45	0.55	0.65
12	0.104				0.26	0.31	0.36	0.41	0.46	0.56	0.65
11	0.116				0.27	0.32	0.37	0.42	0.47	0.56	0.66
10	0.128				0.28	0.33	0.37	0.42	0.47	0.57	0.67
9	0.144					0.34	0.38	0.43	0.48	0.58	0.68
8	0.160					0.35	0.39	0.44	0.49	0.59	0.69
7	0.176						0.40	0.45	0.50	0.60	0.70
6	0.192						0.41	0.46	0.51	0.61	0.71
5	0.212							0.48	0.53	0.62	0.72
4	0.232								0.54	0.64	0.73
3	0.252								0.55	0.65	0.75

Quick change tool system for my Sieg KX1 CNC mill

Ian Johnson explains a quick-change system for a benchtop CNC mill

I have had my KX1 CNC mill for over a couple of years now, and have made some very nice work on it, and overall I'm very impressed and pleased with its capabilities. Standard fitment on the KX1 is the number 2 Morse Taper (2MT) spindle, which can be used in conjunction with various tool holders or collet adaptors. In my opinion the 2MT spindle is cumbersome and is not the best method of changing tools. I want my machine to be much easier to use. This is my effort to solve what became a frustrating fight with the 2MT spindle, **photo 1**.

What's wrong with 2MT on a CNC milling machine?

With jobs requiring multiple tool changes, I quickly found that the 2MT tool holding method is not ideally suited for CNC! To change tools the spindle needs to be locked and the spindle draw bar unscrewed, to release the tool holder, **photo 2**. Even with the self-extract draw bar this can require some effort to loosen off the 2MT. Worse is having to clout the draw bar with a good sharp tap with a hammer, which can't do the carefully trammed head or bearings much good at all!

Using 2MT end mill holders and a 2MT ER25 collet chuck, does make CNC tool changes slightly easier, but I rapidly realised that I wasn't getting the full benefit of the whole CNC experience which includes, quick tool changes, consistent tool positioning, repeatability and ease of use.

CNC and Tool offsets

CNC milling machines need to know the tool length (or 'offset') of each tool, usually taken from the bottom of the tool to the top of the material to be machined. This information can be stored in the 'tool table'. On my machine it is Mach 3. It is very difficult to achieve a repeatable offset for multiple tools using the 2MT end mill



One of the finished tool holders.

holder or ER collets, because every time the tool is loaded, due to variable position, each tool will have a slightly different height every time it is used. Therefore each tool height offset

needs to be individually set every time before it is used, and the biggest nuisance is, of course, releasing and tightening the 2MT.

New tool holder needed!

After deciding that the 2MT tool change just wasn't for me, I set about making a simple quick change tool holder system, which would enable me to use my existing 2MT mounted ER25 collet chuck.

The system relies on using just one single 13mm ER25 collet. This one collet would hold a series of home-made standard size tool holders all with a 13mm diameter shank.

Why 13mm? I had previously made a small tool holder with a 13mm diameter shank, to hold a 1/8" engraving bit which worked very well in the ER25 collet. So I reasoned that if it worked okay once, it would work okay lots of times! This is the only reason why all the tool holders have the same diameter shank. They can of course be made any size.

Essentially it will be a tool, held in a tool holder, which is held in a tool holder, which is held in the spindle. Let's see how it all works out!

Material choice and making the holders

Material of choice was 19mm round steel bar, I think it was re-enforcing bar I got from a steel stockholder years ago, probably high carbon steel? I don't



No more doing this! Extracting 2MT from the KX1

know, but it is tough stuff, certainly good enough for a few little tool holders, **photo 3.**


Cutting the bar into short lengths made it easier to machine on my Mini Lathe. The first step was to machine the 13mm shank 32mm long, and clean up the 19mm diameter body to 18.5mm x 18mm long, giving it a shoulder which will sit squarely against the collet face and won't interfere with the collet clamping nut. We now have two good datum faces, from which we can reference all the tool heights and offsets.

Now to drill and ream the tool holders. Gripping the 13mm shank in the 3 jaw chuck, clock true, face off, chamfer, centre drill, drill and ream for the different diameter end mills. The holders were then drilled and tapped for M3 and M4 grub screws to hold the cutters.

Uh oh! Run out!

Over to the KX1 for a concentricity check. A 3mm end mill was secured into a tool holder, then gripped in the 13mm collet and rotating it against a DTI showed a runout of just over 0.001". The 4mm diameter tool holder had a little less runout but the 6mm diameter holder had slightly more run out of about 0.002" – 0.003". A check of the end mill shank diameters showed them all to be slightly under the given diameter by one or two tenths of a thou. I also found I had slightly bigger reamed holes of a couple of tenths which would give the resulting run out, **photo 4.** Cumulative error!

I later made another couple of holders and carefully honed the bores to suit the milling cutters, this resulted in a much more accurate fit and minimal run out of a couple of tenths. A good test was removing the end mill with a sharp 'pop!'

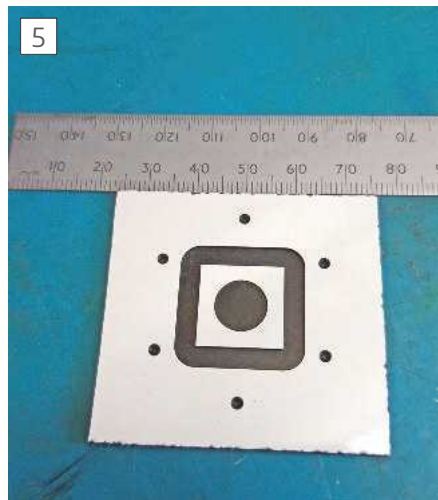

Success! With the three tool test in laminate



A nest of little tool holders.



Checking for tool run out

Apologies for mixing units of measurement, I haven't got a metric dial gauge!

Test programs

Test one was: A 3mm end mill (T2) machining a 10mm diameter circular pocket; a 4mm end mill (T4) machining a 16mm square profile; and a 4mm spot drill (T3) to spot drill six holes at 36mm PCD. The program is saved as a 'Mach2/3 ATC Arcs(mm)(*txt)' file. This ATC program introduces an M06 tool change pause in the program whenever a tool change is needed. For example, T2M06 for the 3mm end mill etc. For this test I used a small offset of white on black 1.6mm laminate, mainly because it shows up better on photos, the depth of cut is only 0.8mm deep.

Test two: A simple circular pocket to accept a 22mm diameter ball bearing. Both tests are produced with Vectric Vcarve.

Setting the tool offsets and pressing the 'go' button

The 3mm end mill and holder (T2) was secured in the 13mm collet, making sure the shoulder was pushed firmly up against the face of the collet. The 'Z' axis was lowered down towards the top of the job and touched off using a piece of paper. This is 'Z' zero for tool T2. Repeat for tool T3 and T4 always making sure the shoulder of the tool holder was firmly up against the collet face (which is now our reference face) and tightened. Tool offsets and information is all done in a few minutes.

I have now completed my 'tool library'.

We are now ready to start machining.

T2 (which is the first tool to be used in this job) is put back into the collet 'Cycle start' is pressed and off we go! The small 10mm circular pocket is milled out and completed, and the machine has paused and stopped to do a tool change. With T4 secure I pressed 'cycle start' and off it went to cut the 16mm square profile. After the square profile is completed, there is another program pause for T3 the 4mm spot drill.

For all the tool changes a 'c' spanner and collet peg spanner are all that's needed to quickly undo the collet, dead easy, dead quick and dead civilised! No fiddling with the self-eject device or hammering at the spindle to get a 2MT holder out of the spindle.

Success!

It worked like a dream, the pocket, the profile and the six spot drills all machined as programmed, with a good surface finish. A quick check with a digital caliper showed that the 16mm square was 16.03mm, not too bad! And the 10mm diameter pocket was 10.07mm, a little larger than I hoped, but this could be due to the small depth of cut giving the calipers a false reading. I repeated the program again, resulting in only slight deviation in tool cut depth resulting in some removal of material, although this was no more than expected from doing a spring pass. Proving that the tool height had not changed significantly, **photo 5**.



Completed tool holders in wooden rack.

The second test was a lot better, using one tool to mill a 4mm deep pocket in aluminium, for a ball bearing of 22mm diameter, resulted in a 21.97mm pocket, a tight tap-in fit, which isn't too bad considering the tool is held in a home-made tool holder, which is held in the spindle. That'll do me!

It was quick and easy to change tools without having to individually re-set the tool height offsets. As long as the face of the tool holder is firmly pressed up against the collet, the tool Z height offsets will certainly be accurate to within 0.05mm (0.002") or better.

It actually works better than I thought it would. Once I got used to populating the tool table with the tool offsets,

I found it so easy to machine with multiple tools, usually making a note on which tool holder has which tool. Indeed, the new tool holder system worked very well on a recent engraving job using four different tools.

In the end I made 18 little tool holders including 1/8", 3mm, 4mm, 5mm, 6mm diameter holders, a 10 mm holder for an edge finder, a fly cutter, a small Jacobs chuck, and spare blanks, all neatly held in a wooden tool holder. I thought I'd have a go at blacking them in engine oil, photo 6, they don't look too bad unless you get too close!

Problems and benefits?

The run out was slightly annoying but didn't seem to have too much of an



Tool height comparison. New holder.



Tool height comparison. ER25 collet.



Tool height comparison. 2MT end mill holder. ➤

effect on accuracy, although rotating the holder and tool did make some improvement. The honed holders have better concentricity.

Tool stick out looks horrendous when comparing between a 2MT end mill holder, and the 2MT ER25 collet holder, it is about 35mm extra! The end mill holder looks as though it's the most rigid with the least stick out, but so far it is not a problem. See **photos 7, 8 and 9** for tool stick out comparison.

Wear and tear on the one collet could be an issue? Maybe after a few years of use.

The benefits far outweigh any problems. The tool holders are reasonably accurate and true to the spindle (better than I expected), I can now expect to cut and repeat to within 0.05mm or better. Making multiple parts with different tools is now amazingly simple, I can quickly change tools by using just the usual two ER collet spanners, confident they will be set to correct Z tool height offsets and repeat consistently. As I use them more, I will be able to compensate for any errors or runout. Eventually the most used tools will be permanently populated in the Mach3 tool table and the Vectric Vcarve software.

Overall verdict

Essentially, they work! After a few



Machining mild steel ring with 3 flute 6mm end mill.

months of using the tool holders, apart from taking the photos for this article, I haven't once taken the 2MT ER25 collet holder out of the spindle. The KX1, with its new tool holders, has successfully machined plastic, aluminium, brass and mild steel, with a variety of cutting tools. Tool life is no worse or better than before, and repeatability is very good, **photo 10**.

Oh! The biggest bonus – see photo 2 again – I no longer have to extract the 2MT from the spindle for every tool change, or re-enter the Z offsets. Yay! ■

References

My bloggy website:

www.thesmallworkshop.co.uk

KX1 bought from:

www.arceurotrade.co.uk

CAD/CAM: **www.vectric.com**

CAD/CAM: **www.machsupport.com**

Cutting tools: **www.rennietool.co.uk**

Cutting tools:

www.jbcuttingtools.com


In our Next Issue

Coming up in issue 305

On Sale 18th June 2021

Content may be subject to change

Look out for MEW 305, your July issue, which brings you more great workshop builds and ideas:

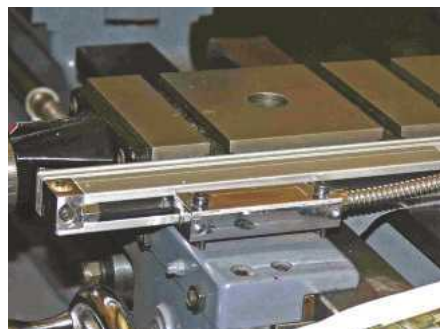

Jacques van Damme fits a Bluetooth DRO to a Myford lathe.



Terry Gorin makes a vertical slide to suit a small lathe.



R. Finch adapts the Diamond Toolholder to take smaller bits.

DON'T MISS THIS GREAT ISSUE - SEE PAGE 48 FOR OUR LATEST SUBSCRIPTION OFFER

A.m.€ 01952 879607

Abbotts Model Engineering
Makers of fine 5" & 7 1/4" Gauge
Locomotives & Rolling Stock

See Website for up to date info.
Please re-fresh your website browser.



7.1/4" g Excalibur

"NEW" "Sit-in" Locomotive From £4995 (P2R)



Choice of cab window layout



Accessories:

- * 6 Motor (Co - Co) upgrade. * Fitted vacuum. * Sound system.
 - * 240v Mains charger. * GPS speedo. * Buffer upgrade.
- Unit D7, Haybrook Ind Est, Halesfield 9, Telford, TF7 4QW

Shop open Mon to Fri 9.00am to 4.00pm
Locomotives, Coaches & Trucks all on display
(See website for products & updates)

www.ametrains.co.uk



Class 50 Hoover

£3,450 (inc VAT)

www.phoenixlocos.com

01784 548 957

Class 52 Western

£3,450 (inc VAT)

7 1/4" NARROWGAUGE SLATE WAGON

Complete bolt together kit with
everything you need included



Straightforward assembly with full illustrated
instructions included.

Price £499.00 ex works (+VAT)

Order online at www.17d-ltd.co.uk - email: sales@17d.uk - Phone 01629 825070 or 07780 956423



MINIATURE RAILWAY SPECIALISTS
LOCOMOTIVES, ROLLING STOCK, COMPONENTS
CNC MACHINING SERVICES


www.17d-ltd.co.uk

17D Limited, Units 12 & 13 Via Gellia Mill, Bonsall, Matlock, Derbyshire, DE4 2AJ

Fitting a Screwcutting Clutch to the Emco Maximat Super 11



Graham Meek describes an accessory thirty-three years in the making.

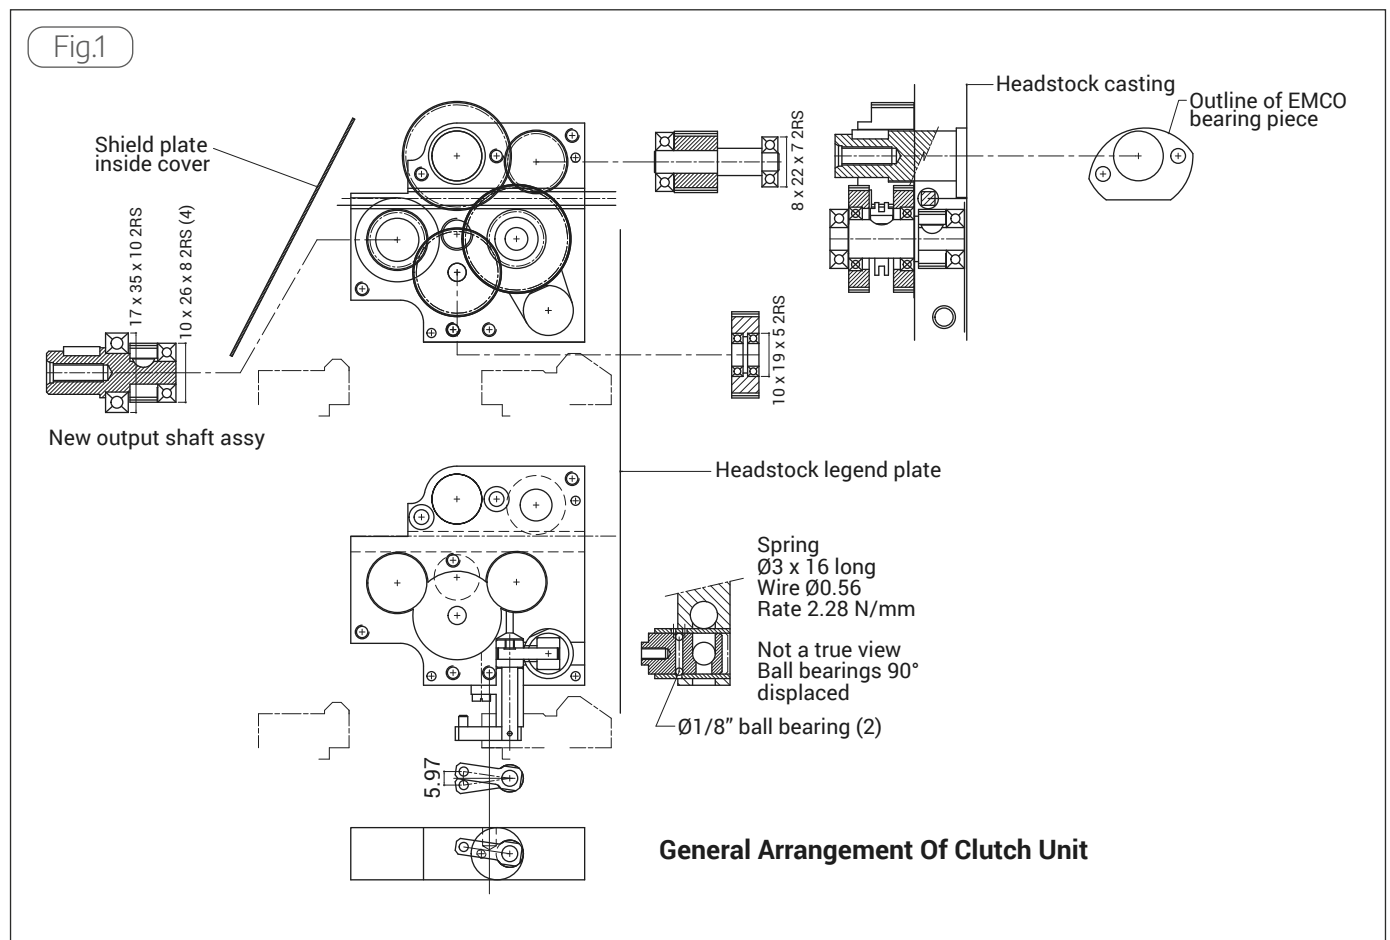


The initial design of a screwcutting clutch for the Emco originated as I was putting the finishing touches to the Myford Super 7 design in 1986. The fitting of the attachment to my Emco lathe has only just come to fruition 33 years later. The design presented here is not my initial design, as this was intended to be fitted within the headstock gearbox, utilising the gear positions of the standard Emco feed reversing mechanism.

The beauty of the first design is that it introduced only one more gear into the system. The big stumbling block

with this approach was the need to strip the headstock down in order to fit the attachment. Emco UK had originally agreed to lend me a complete headstock unit, but all this fell through when Emco, Austria closed their UK base. They did however give me a full set of working drawings. With the lathe in daily use earning my daily bread for nearly 10 of those years the idea was put on the back burner. Health issues finally dealt the killer blow for the idea, as I did not want to strip the machine down and then be unable to reassemble for months due to my illness kicking in.


Early in 2018 a member on a US forum asked if I had ever succeeded in fitting the clutch. This prompted a review of the idea but with a view to fitting the clutch externally. Sadly after about five attempts this too came to a full stop due to fouling issues with the control rods and the changewheel quadrant banjo. I therefore had to declare it could not be done. Then towards the end of 2018 a further question was asked on the ME forum. However I did not pick up on this request until early in 2019. Initially I responded with my previous reasons and the failed attempt to fit the clutch

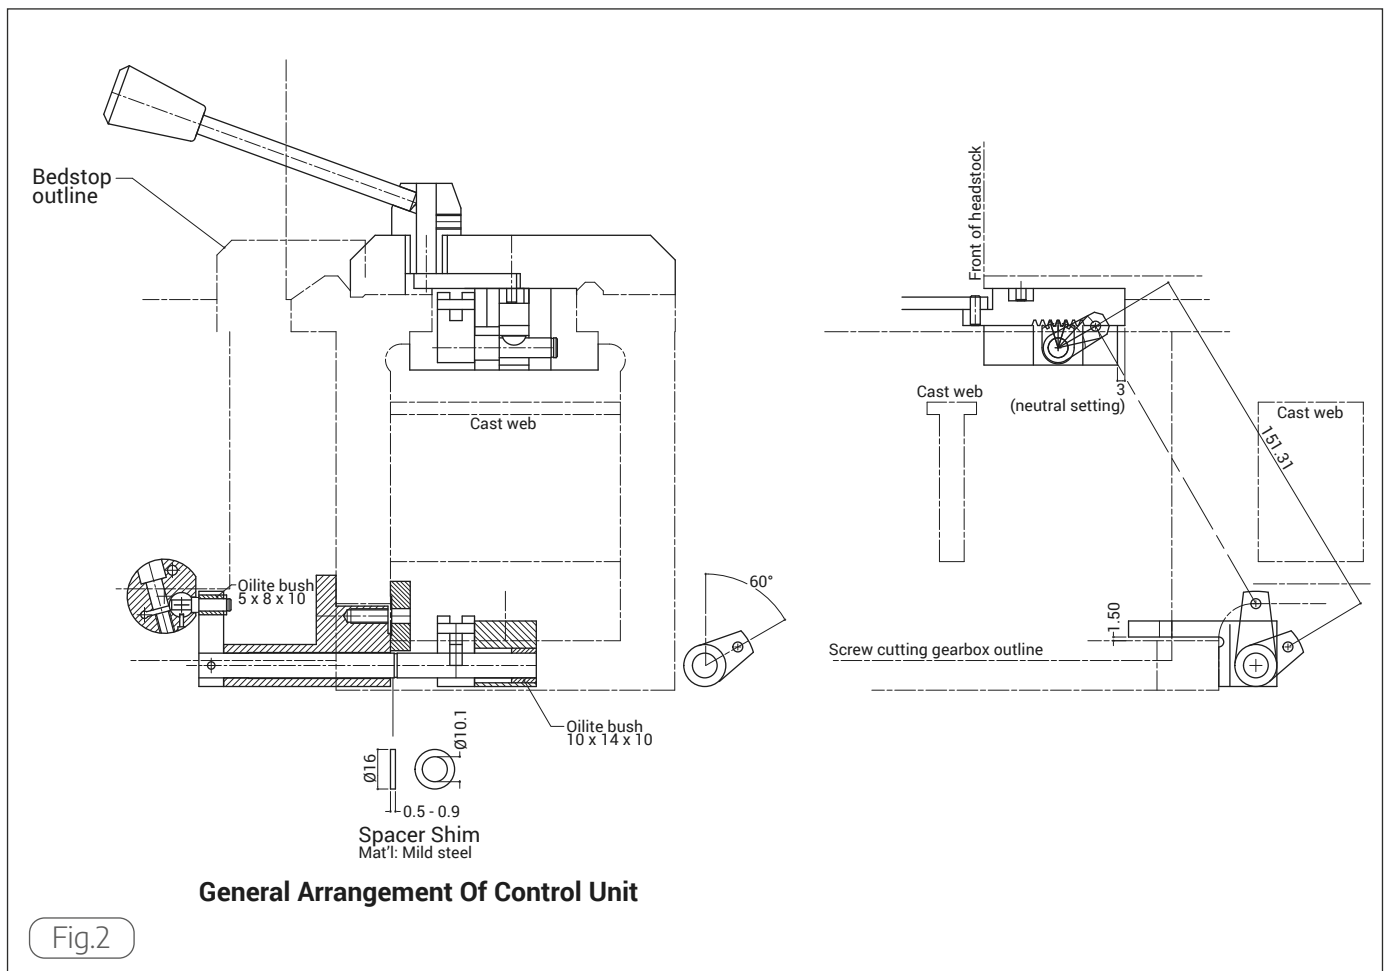

Sadly after about five attempts this too came to a full stop due to fouling issues with the control rods and the changewheel quadrant banjo.

externally. However a few evenings later the penny dropped that up until now I had only tried fitting the clutch inboard of the change wheel banjo. What about fitting it external to the banjo?

Thus began a few evenings at the drawing board and eventually a working schematic emerged, **figures 1, 2 and 3**. This however was not the final design, the Mk2 eventually became the Mk3, and even this went through several revisions eventually finishing at "E". Most of those revisions were down to the Emco drawings being of later production machines than mine. Some were due to the expensive bearings chosen for the Mk2 design.




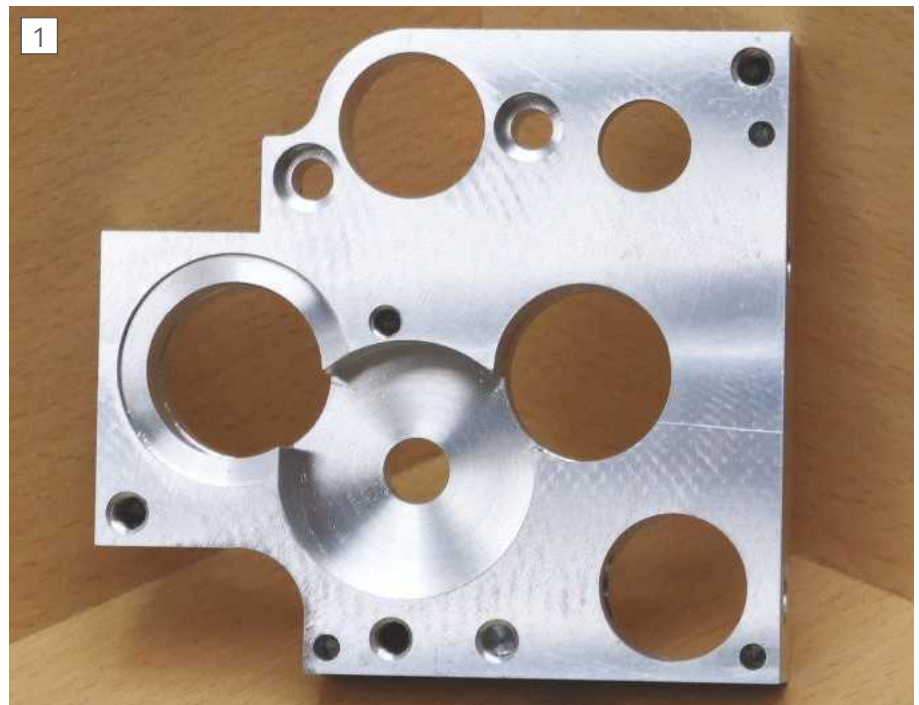


Main body-front view.





Work started on the main body, and that was nearly the end of the project. A few operations from the end I found a crack running through the thickness of the cast iron tooling plate. There

was no alternative but to start again, but this time a piece of aluminium was used, **photos 1 and 2**. The 20mm flat bottom hole in the centre of the rear view, to clear the oil drain hole on the


Fig.3

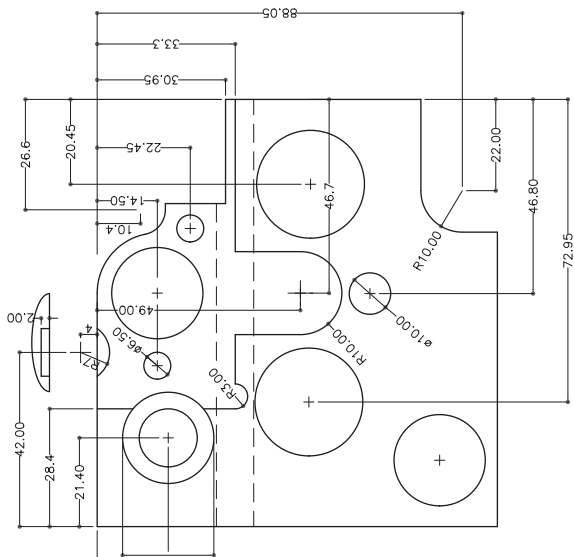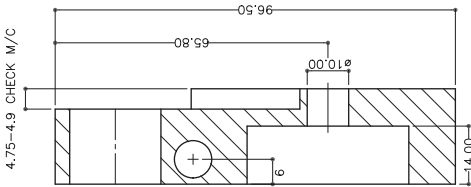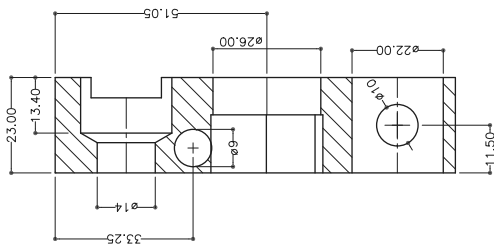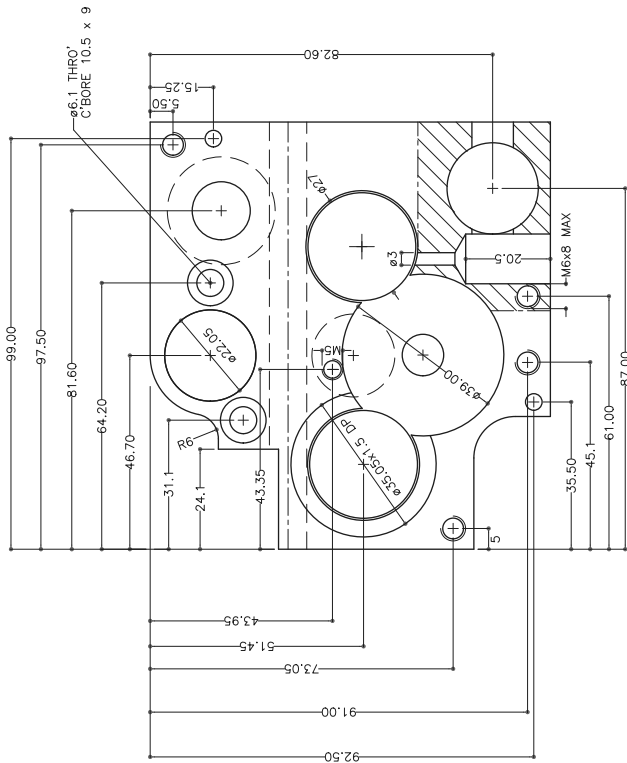


Main Body
Mat'l: Aluminium

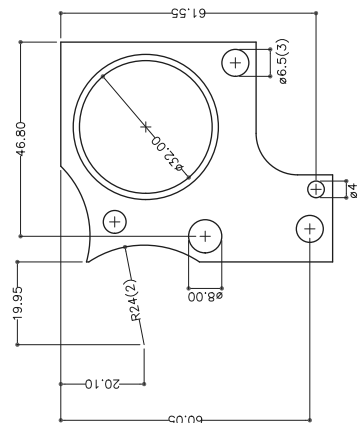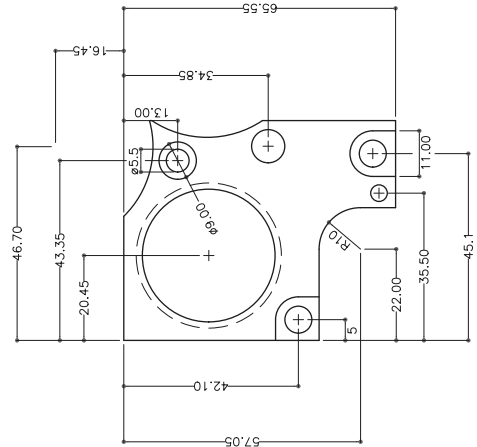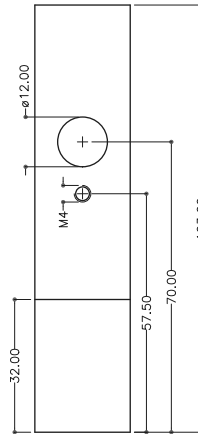

Output Bearing Cover
Mat'l: Aluminium

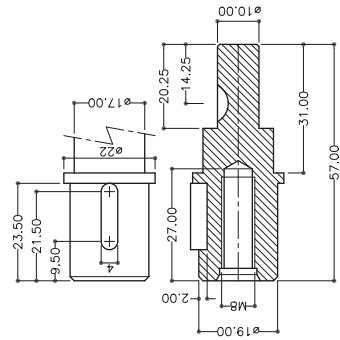

Output Shaft
Mat'l: 01 tool steel

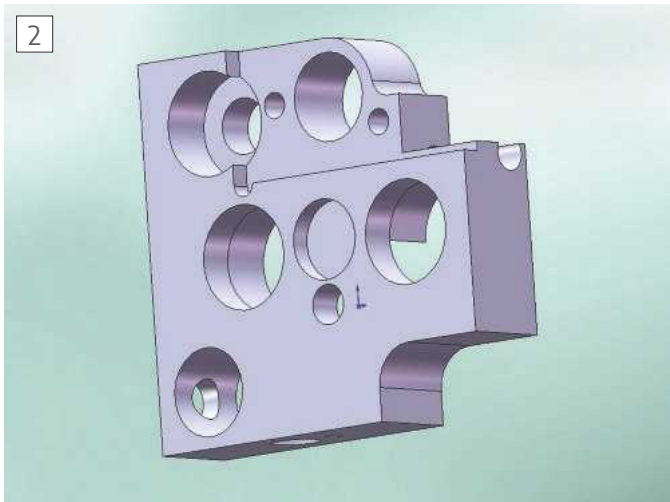


Main body rear view.



Boring & facing head with torque arm.

headstock, is now a 20mm wide slot. My drain hole sits higher on my machine than it is drawn on the Emco drawings. Luckily the making of the new main body and the covers was made a lot easier with my new Boring & Facing Head, combined with the power down feed I fitted to my FB 2 some years back, **photos 3 and 4**. The covers are located on dowels to maintain alignment of the various bearings. These covers need to be easy to remove but not that lose that the alignment is lost, **photo 5**.

There are seven new gears in this assembly, they are all 1 module as this is the same size as the changewheels, **photo 6**. In an effort to lessen the noise produced by the extra gears most of them are encased in the aluminium bodied unit. All the gears run on ball bearing races, the dog gears having a single bearing pressed in, **photo 7**. To ensure the gears do not come adrift the press fit needs to be precise, a bore in the dog gear which is 0.02mm down on the nominal diameter will be fine. Be sure to have an undercut in the corner

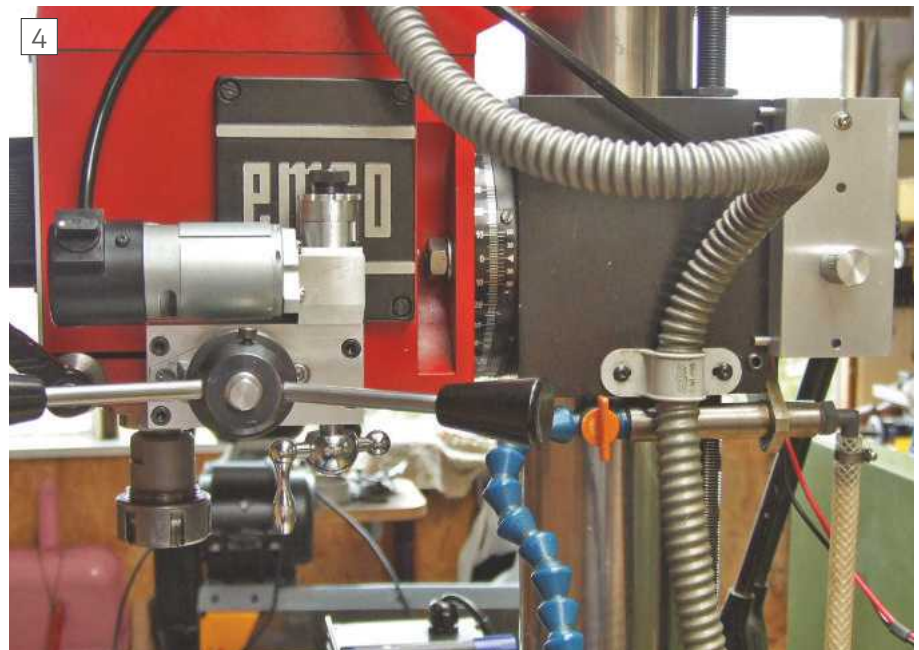

Emco FB2 quill feed finished.

to ensure the bearing sits squarely in the gear, not riding on a radius left by the boring tool. The dog clutch and the

dog gears have the dogs milled integral, similar to the Hardinge HLV. An oil nipple in the end of the dog clutch shaft allows the clutch to be lubricated and a connecting hole in the dog clutch allows oil to lubricate the clutch fork. The length of the woodruff key needs to be shortened symmetrically about the key centre-line. If this is not done, then the two dog gears can contact this key and try to drive the shaft in two directions at once. The part that fails might be inside the headstock!

The selector mechanism is the proven Super 7 version, but with a twist. The ball bearing detents are inside the selector on this unit. With the selector bush having three holes to give the engaged and neutral positions. Inserting the balls, spring and the selector into the selector bush can be fun. To make things easier a tapered


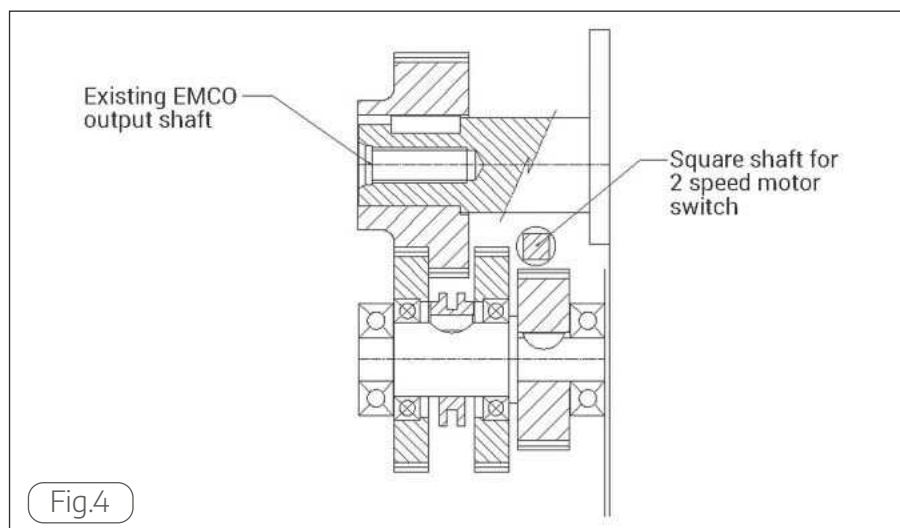


Fig.4




5 Main body with clutch gearbox cover fitted.

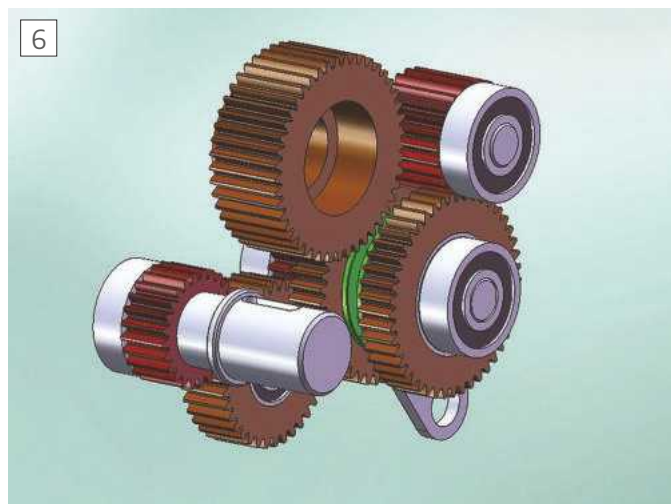

6 Gear assembly rendered in 3d by Jon Slater.


sleeve was used to first assemble the selector then the parts were smartly pushed from the taper to the selector bush. The orientation of the selector bush is important. A flat on the bush clears the dog gear teeth nearest the headstock. To align this correctly a small alignment pin is needed. This fits the 10mm hole in the main body and the 7mm hole in the bush. It is left in position until the Loctite is set on the selector bush, then removed. The bush and selector mechanism are the first items to be assembled into the main body. As access is needed to tighten the M4 grub screw that locks the selector pushrod. This is through the 3mm hole in the dog clutch output gear cavity in the main body.

All shafts are press a fit in the bearings in the main body with the exception of the output shaft which needs to be a slide fit, but with no shake. This allows the output shaft and cover to

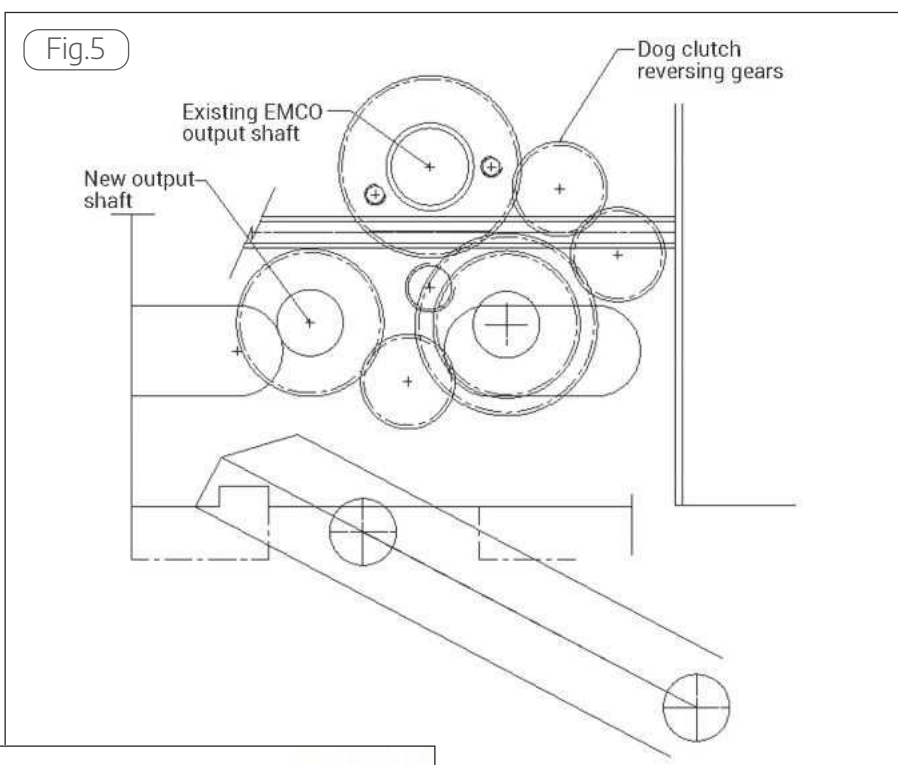

7 The dog clutch parts.


be removed as a unit. The shaft that carries the dog clutch cluster and the input idler need to be the same slide fit in the dog clutch cover bearings, as this cover is assembled last when the main body is attached. The control rod for the two speed switch needs to be removed before any attempt to assemble the main body is made. Be sure to make note of the orientation of the chamfer at the operator end of the switch. Care also needs to be taken with the Emco output shaft once the retaining screws are removed. End pressure should always be applied to the end of the shaft. If this is inadvertently pulled out then it will mean a strip down of the headstock to replace the parts that have fallen off inside. The pocket in the

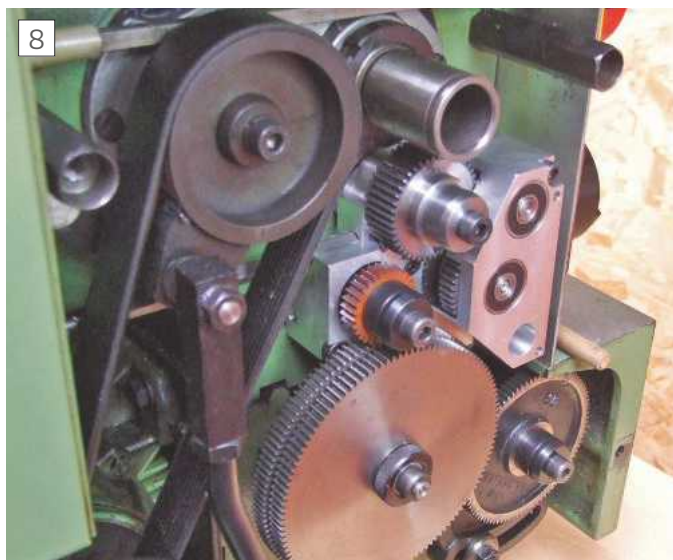

Clutch fitted.



Clutch control lever and associated parts.

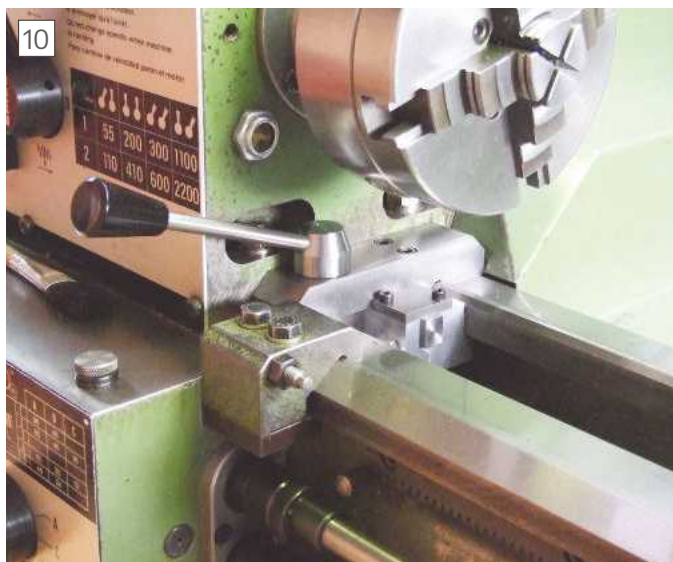

Clutch control lever.



Clutch lever exploded view.

rear of the main body needs to be the same dimension or less than the Emco bearing piece plus the gasket, 0.05mm less would be ideal. The manufacture of a simple gauge to test this dimension pays dividends. If the step is larger, then the original Emco bearing piece will not be secured and might leak oil. Further as the main body is not squarely and firmly located the unit could work loose in use. Be sure to pop the connector link onto the selector crank before inserting the main body. Once the main body is firmly attached the clutch cover can be assembled and attention can be switched to the control unit, **photo 8**.

The control unit in front of the headstock, **photos 9** and **10**, transmits motion to the selector by a rectangular connector rod, **photo 11**. The holes in this rod need to be slightly oversize on the dowels used in the selector

The control rod for the two speed switch needs to be removed before any attempt to assemble the main body is made.

lever and the control ram. A clearance of 0.05mm was what was used on the prototype, this is needed to aid assembly. Reamers are readily available for the 4mm size. This clearance does not affect the operation as there is some lost motion anyway, (see later).

Assembly of the control unit like the main body is in stages. The process

will be found easier if a piece of BMS (bright mild steel) or aluminium 8 x 30 x 150mm is to hand. First thoroughly clean the underside face of the bedways where the unit sits. Then manipulate the partially assembled, body, ram, ram keep plate and the bell crank assembly between the bedways. Make sure the teeth on the ram mesh correctly with the segmented gear. Hold the assembly while sliding the rectangular bar beneath. The bar sits on the cast web tops and the control unit sits on this while the bed clamp piece is assembled, but minus all the levers. Urge the assembly up tight to the headstock.

●To be continued

DIRECT DEBIT SUBSCRIPTIONS (UK ONLY)

Yes, I would like to subscribe to **Model Engineers' Workshop**

- ☐ Print + Digital: £13.50 every 3 months
☐ Print Subscription: £11.25 every 3 months

YOUR DETAILS MUST BE COMPLETED

Mr/Mrs/Miss/Ms Initial Surname
 Address
 Postcode Country
 Tel Mobile
 Email D.O.B.

I WOULD LIKE TO SEND A GIFT TO:

Mr/Mrs/Miss/Ms Initial Surname
 Address
 Postcode Country

INSTRUCTIONS TO YOUR BANK/BUILDING SOCIETY

Originator's reference 422562 
 Name of bank
 Address of bank
 Postcode
 Account holder
 Signature Date

Sort code Account number

Instructions to your bank or building society: Please pay MyTimeMedia Ltd. Direct Debits from the account detailed in this instruction subject to the safeguards assured by the Direct Debit Guarantee. I understand that this instruction may remain with MyTimeMedia Ltd and if so, details will be passed electronically to my bank/building society.

Reference Number (official use only)

Please note that banks and building societies may not accept Direct Debit instructions from some types of account.

CARD PAYMENTS & OVERSEAS

Yes, I would like to subscribe to **Model Engineers' Workshop**, for 1 year with a one-off payment

UK ONLY:

- ☐ Print + Digital: £56.99
☐ Print: £47.99

EUROPE & ROW:

- ☐ EU Print + Digital: £64.95
☐ EU Print: £55.95
☐ ROW Print + Digital: £71.95 CC
☐ ROW Print: £62.95 CC

PAYMENT DETAILS

- ☐ Postal Order/Cheque ☐ Visa/MasterCard ☐ Maestro
 Please make cheques payable to MyTimeMedia Ltd and write code MEW2021 on the back

Cardholder's name

Card no: (Maestro)

Valid from Expiry date Maestro issue no

Signature Date

TERMS & CONDITIONS: Offer ends 31st December 2021. MyTimeMedia collects your data so that we can fulfil your subscription. We may also, from time to time, send you details of MyTimeMedia offers, events and competitions but you always have a choice and can opt out by emailing us at unsubscribe@modelengineersworkshop.co.uk. Please select here if you are happy to receive such offers by email ☐ or by post ☐. We do not share or sell your data with third parties. Details you share with us will be managed as outlined in our Private Policy here <http://www.mytimemedia.co.uk/privacy-policy>. Please visit www.mytimemedia.co.uk/terms for full terms and conditions

**POST THIS FORM TO: MODEL ENGINEERS' WORKSHOP
 SUBSCRIPTIONS, MYTIMEMEDIA LTD,
 3 QUEENSBRIDGE, THE LAKES, NORTHAMPTON NN4 7BF**

**HURRY
 OFFER
 CLOSES**
 31st December
 2021



PRINT + DIGITAL SUBSCRIPTION

- 1 year's worth **delivered to your door**
- **Great Savings** on the shop price
- **Download** each new issue to your device
- A **75% discount** on your Digital Subscription
- Access your subscription on **multiple devices**
- Access to the **Online Archive** dating back to Summer 1990



PRINT SUBSCRIPTION

- 1 year's worth **delivered to your door**
- **Great Savings** on the shop price
- Save up **to 23% off the shop price**

SUBSCRIBE TODAY

DIGITAL
SUBSCRIPTIONS
AVAILABLE ONLINE!

MODEL ENGINEERS' WORKSHOP

Get your favourite magazine for less, delivered to your door when you subscribe today!

Model Engineers' Workshop is ideal for enthusiasts who operate a home engineering workshop for both model construction or to support an engineering related hobby. The magazine covers machine and hand tools; accessories and attachments, materials and processes. It provides guidance on the selection, commissioning and use of tools and equipment. It is the essential guide for any workshop.



TERMS & CONDITIONS: Offer ends 31st December 2021.

**This digital discount is only available when you subscribe to the 'Print + Digital' package. You can still get a great discount on the digital package, please visit the URL stated below for more information. Please see www.mytimemedia.co.uk/terms for full terms and conditions.

SUBSCRIBE SECURELY ONLINE

 <https://me.secureorder.co.uk/mew/MEW2021>

CALL OUR ORDER LINE

 **0344 243 9023**

Quote ref: MEW2021

Lines open Mon - Fri - 8.00am - 8.00pm GMT & Sat - 9.30am - 3.30pm GMT.

Calls are charged at the same rate as standard UK landlines and are included as part of any inclusive or free minutes allowances. There are no additional charges with this number. Overseas calls will cost more.

Bandsaw Blade Silver Soldering Station



Will Doggett describes a useful workshop tool for all bandsaw users

Finished soldering station

The concept

When I was using my bandsaw, the blade stopped unexpectedly – the machine was still running but not the blade. At first I thought the blade

had come off the drive wheel but on investigation the blade had broken. I had no idea why the blade had broken, the material I was cutting was not difficult to cut and the blade was in good condition.

As the blade was in good condition and sharp I decided to repair it.

The scarfs were finished with a power file and held on a piece of angle for support. That was ok, the process got



Before derusting



After the acid bath



Blade slot



Heating position



Clamps & screws



Lug sweater carbons

difficult when holding the two parts of the blade together for silver soldering.

This was cobbled together with a piece of angle as the base and some mole grips to clamp the blades and a rule to line the blade ends up. The scarf's were coated with flux and a small piece of silver solder placed in the joint.

Then using a small heating torch I melted the silver solder. The whole thing was a lashup, but it did the job at the time and was a success as the blade is working again.

The lash up got me thinking there must be a better way of doing it when silver soldering the two ends back together after a breakage. This was my reason for making a tool to support the blade square, and more importantly, in line with proper clamps to hold the two parts, as well as being able to heat the blade from below as well as from the top.

Construction

To make the tool, **photo 1**, I cut a piece of 50 x 50mm angle 170mm long. I then

put it in a citric acid bath for two days to remove the rust on it.

Having soaked it I removed it from the bath and then washed it in water to remove the acid and the rust. To stop more rust forming I dried the angle and then sprayed it with a water repellent that has PTFE in it, **photos 2 and 3** show before and after the acid treatment.

To hold the blade in line I machined a slot in the top face of the angle 5mm in from the front edge of the angle this was 14mm wide and 3mm deep to fit the blade from the bandsaw, **photo 4**.

The two parts of the blade are held in line by the edge of the slot on the back edge of the blade.

To heat the blade from the bottom as well as from the top, I machined a slot through the angle on the centre line of the angle and at right angle to the first slot, **photo 5**, this slot was also 14mm wide.

To hold the blade in position for silver soldering I made two small clamps these were made from 3mm

thick steel 15mm wide and 40mm long. They have a small bend on the end so that they clamp the blade, also 3.5mm holes for the fixing screws.

To hold the clamps I used two M3 x 20mm hexagon head screws with a 12mm diameter knurled top that I turned in the lathe. These were counter bored for the head of the screws, they were then drilled and tapped M3. The counter bore was to allow the head to be screwed in to the top and be flush. **Photograph 6** shows the parts assembled but before finishing, the reason for using long screws was so the clamps and screws can stay in position when fitting the blades under the clamps.

Testing the soldering station

To test the tool I used a piece of steel belt strapping this was a bit thinner than the saw blade but would do for testing, using a power file to form a scarf on two ends of the strapping. I then put some silver solder flux on the two scarf faces, these were then held against the

edge of the slot to line them up then they were then held in position with the clamps. A small piece of silver solder was put in the gap between the scarf faces.

To heat the joint is where I deviate from the normal. I did not use a gas torch this time but used a lug sweater – this was an experiment to see if it would be hot enough to melt silver solder. The carbon pads are shown in **photo 7**, as you can see the carbons are new – I had to change them as the other ones were worn down and didn't close properly. I normally use it for sweating copper pipe joints which are in tight places when doing plumbing jobs. The sweated joint is shown in **photo 8**, before cleaning it up.

Note The idea to use the lug sweater was that I had in the past used a bandsaw with a repair station on the side of it. This used an induction heater to melt the silver solder, so this was the thinking behind the use of the lug sweater.

The lug sweater that I have is one of the heavy industrial ones, I do not know if the lighter pipe sweaters from the DIY shops will have enough power to do this but it's worth a try if you have one. If not, it can be done with a small gas torch (I've found a 'cook's blowtorch' is strong enough to silver solder bandsaw blades – Ed.)

Blade scarf holder

After making the clamping tool to hold the blade when silver soldering, I thought that it was not a good idea to do blade scarfs or finishing on it. I made a blade holder for the purpose, from 50 x 50mm angle cut 120mm long.

To clean the angle I used the same process on this angle as I did with the first one i.e. a soak in citric acid. After cleaning with the acid the part was washed in water and sprayed as before.

The next step was to mount the angle in the milling machine vice and machine a slot with a 5mm lip on the front edge and 2mm deep by 14mm wide. The rest of the top was milled 1mm deep across to another 5mm lip. **Photograph 9** shows the machining of the base from the end.

To hold the blade in position a small clamp was made to fit the machined top 40mm long, 22mm wide and 5mm thick. The back part was reduced to 3mm leaving a 12mm section at 5mm. It was then drilled M3 clearance 20mm from the front edge, **photo 10** shows the clamp.

The holding down hole was then transferred to the main body and this



The silver soldered joint




Blade finishing slot



Finishing clamp



Linishing clamp fixing screw

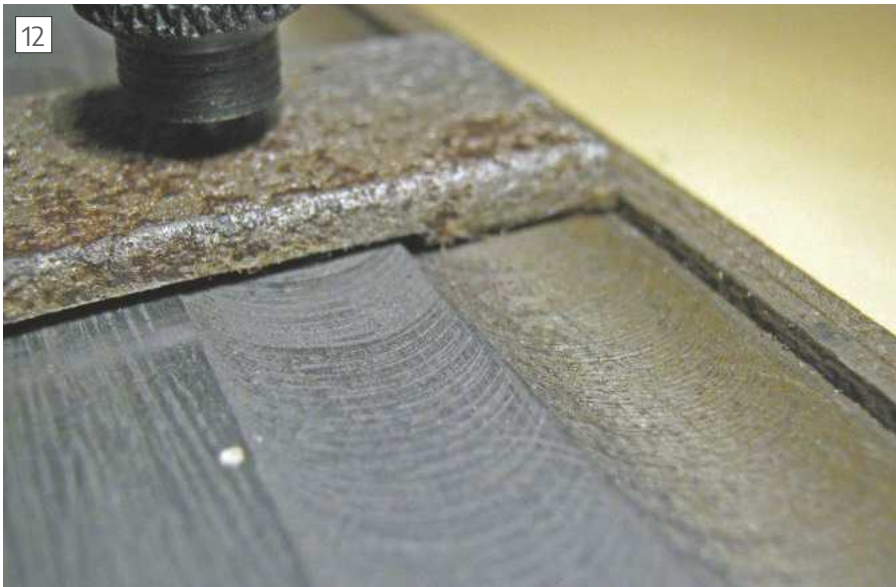

Clamp & slot



The finished linishing tool

was drilled and tapped M3 for the screw that will hold the clamp and blade in position.

To hold the clamp I used the same method as before to make the holding down screw this is a 3mm x 20mm hexagon head screw with 12mm knurled top. The finished screw is shown in **photo 11**.

The clamp and the holding down screw are shown in position in the slot ready for the blade to be put in for finishing with a scarf, **photo 12**.

The finished blade thinning/linishing tool is shown in **photo 13** without a blade fitted.

Both parts were left as they are the only finish is a coat of spray grease to stop them rusting again, as I thought that if I painted them the paint would burn off if was to use a gas torch. Grease can be removed to use the tool with a gas torch and then re-applied after it has been used.

Conclusion

In the last seven years that I have had this bandsaw I have only had one other blade break, and this was fairly worn and not worth repairing so a repair station has not been required until now.

It is not until you have to repair a broken blade that you realize the usefulness of this tool as I said at the beginning lining up and clamping a bandsaw blade without a proper jig is to say the least very frustrating. So with this in mind I think it was worth making it as it doesn't take long to make (after cleaning) and when I require to repair a blade in the future it will be so much easier. The only downside is that you do require a milling machine of some sort or a shaper to make this tool in the way I have made it.

The milling can also be done in the lathe if no other form of machine is available. The other option is to fabricate it with strips of steel to form the blade slot screwed or silver soldered together.

The main point is that you require something to line-up the back plain part of the two blades as this is the part of the blades that runs under the bearing the above the blade. This transfers the pressure of the bandsaw frame onto the job. If this line is not straight, the blade will jump on the support bearings causing the blade to break again. ■

Scribe a line

YOUR CHANCE TO TALK TO US!

Drop us a line and share your advice, questions and opinions with other readers.

Mystery Tool Quiz

Dear Neil, a test for readers! What is the use of this mystery tool made with a 100mm wide 1mm aluminium plate set at an angle on a wood handle?

Jacques Maurel

The answer is on the last page of Scribe a Line



Angle Grinder Nuts

Dear Neil, I was interested in reading the article in the May edition of Model Engineers' Workshop about angle grinders. I have also in the past struggled to unscrew the disk nut especially if the press button lock would not hold.

Please see my modification. I put flats on the nut.

This permits it to be gripped in a vice or with a spanner. I have found the supplied 'C' spanners unsatisfactory as they have a tendency to bend.

I can recommend Machine Mart's adjustable 'C' spanner part number 060529901 as much more robust.

William Waddilove, by email



A 'Cribbed' Tip

Dear Neil, I bought a bandsaw from Lidl at a reduced price and was initially disappointed with the vice, a tack-welded folded sheet steel box, even the jaws are 12g sheet. However, on trying it out it held round section metal quite firmly. Why? The moving jaw is tilted forward about five degrees. Simple, but it works – surely the essence of good engineering! Milling or filing the jaw of a cheap cast-iron vice will be as effective (and won't eventually bend).

Now a query – I like Alan Donovan's brazing hearth, but wonder how the heat-reflecting capacity of his lightweight wall blocks compares with that of Fosacil or Folsain as recommended by Tubal Cain? My local builders' merchant claims not to have heard of either, nor of the vermiculite block or sheet recommended by Keith Hale.

Can readers assist?

Johns Smith, Shipston-on-Stour

Hello John. My worry is how will the vice cope with flat objects – will they tip? I can't answer your question, aside from mentioning that I obtained vermiculite blocks for my hearth from Chronos, one of the specialist hobby suppliers, some years ago – Neil.


Workshop Walls

Dear Neil, Glad your house move has gone OK. For your new workshop can I suggest that before you cover the walls with shelves, etc, that you paint them white. It makes a big difference to the lighting. I expect it is full of boxes though at the moment.

Keith Beaumont, by email.

Continued on page 56

Bringing British industrial history to life


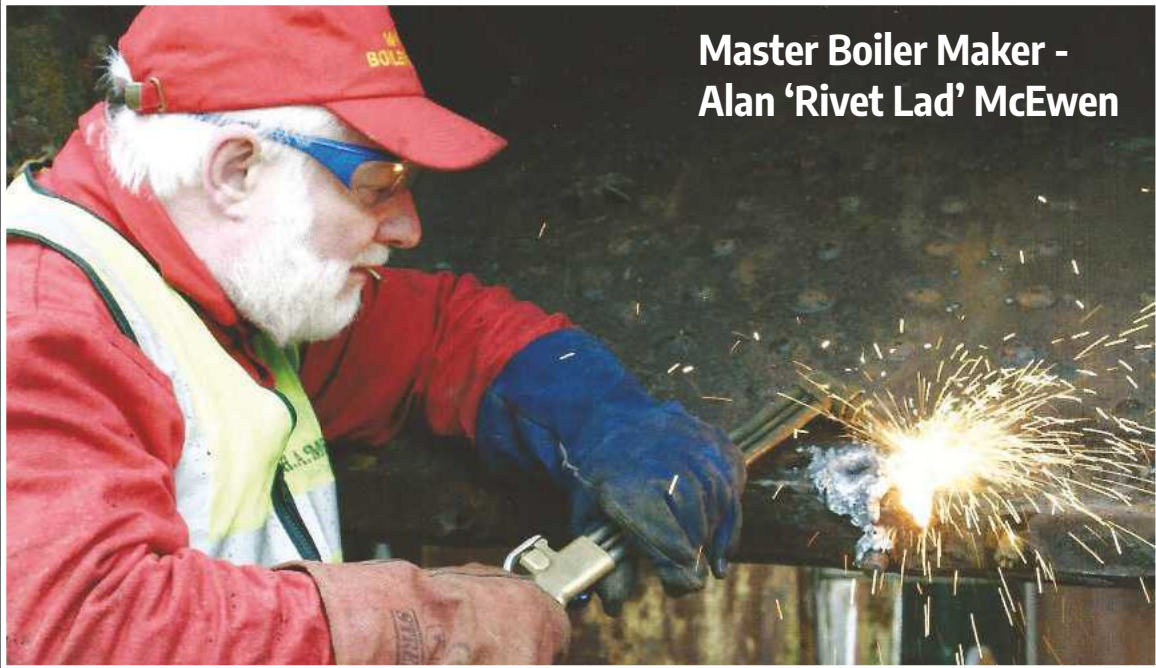


Master Boiler Maker -
Alan 'Rivet Lad' McEwen

When Master Boiler Maker and author, Alan McEwen was a young sprog, he loved banging and hammering on rusty old boilers; now that he is an old hog, he just prefers others to bang and hammer!

Alan McEwen's Boiler Making adventures and also 'potted histories'

of several Lancashire and Yorkshire Boiler Making firms, can be read in **RIVET LAD - Lusty Tales of Boiler Making in the Lancashire Mill Towns of the 1960s**. The book is crammed with 'hands on' technical information of how Lancashire, Locomotive, Economic, and Cochran Vertical boilers were repaired over 50 years ago. The book's larger-than-life characters, the hard as nails, ale-sipping, chain-smoking Boiler Makers: Carrot Crampthorn, Reuben 'Iron Man' Ramsbottom, Teddy Tulip, genial Irishman Paddy O'Boyle, and not least Alan himself, are, to a man, throw-backs to times gone by when British industry was the envy of the world.

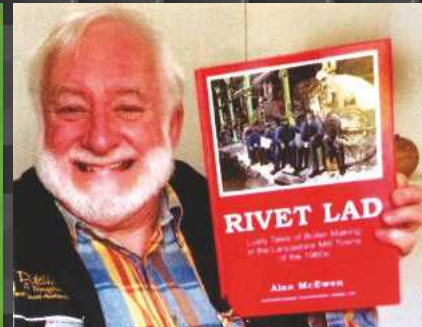

Alan McEwen's first RIVET LAD book: **RIVET LAD - Lusty Tales of Boiler Making in the Lancashire Mill Towns of the Sixties** published September 2017 is now priced at £25 plus £3.00 postage and packing to UK addresses.

Alan's second RIVET LAD book: **RIVET LAD - More Battles With Old Steam Boilers** was published in September 2018. Now priced at £25 including postage and packing to UK addresses.

BOOK BUNDLE SPECIAL OFFER

Both RIVET LAD books can be purchased together for £40 plus £5 postage and packing to UK addresses. To place an order please telephone 01535 637153 / 07971 906105. All our books can be ordered on our website www.sledgehammerengineeringpress.co.uk or email: lankyboilermaker@btconnect.com.

Overseas customers contact Sledgehammer by email for postage costs.


We accept payment by debit/credit card, cheques, cash and postal orders made out to **SLEDGEHAMMER ENGINEERING PRESS LTD.**
World From Rough Stones House, Farling Top, Cowling, North Yorkshire, BD22 0NW.

Concentrica

Hi Neil, thanks for a very good hobby magazine MEW! I had to smile when I saw the concentra article by Pete Worden. I made a similar device in the '60s, I enclose a photo for comparison.

I think it will be difficult to adjust Pete's version with the adjusting screw that way round, it would be best on the outside don't you think?

Jim Simpson, by email

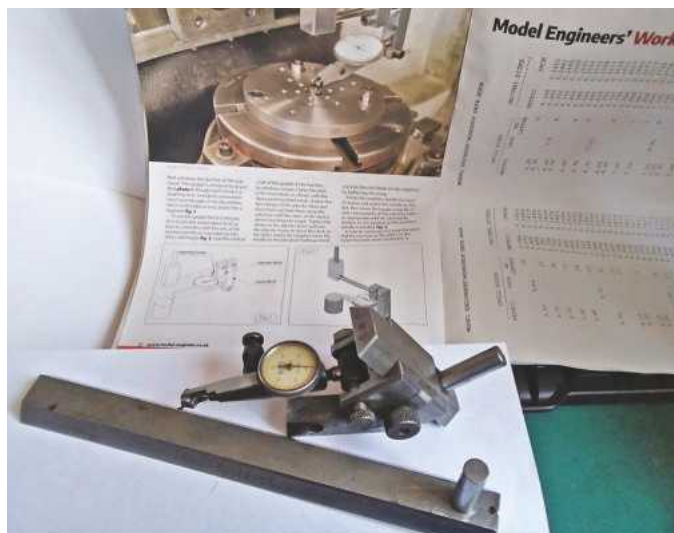

Workshop Floors

Hi Neil,

In my 6mx6m garage/workshop, I first had the concrete 'self-levelled', then laid 18mm waterproof t&g chipboard (green stuff). Before laying it, I glued on thin foam wall insulation, which was the exact width needed. This provides just a little cushioning to take out small variances in the surface and remove 'crunch noises'.

It stays strong and for twelve years parked my Mk1 Golf cabriolet on it, without detriment. A Warco GH1236 and large Flott pillar drill now occupy the space.

As well as adding considerably to the warmth factor, it is also easy to paint and rolling stuff around on castors is quiet and easy!

Best of luck with your fitting out and many thanks for the consistently excellent and enjoyable magazine content!

Don Boddy, by email

Flexible Swarf Screen, MEW 303 Tips

What a brilliant idea. Many thanks Rob [Edwards] - I immediately went into my workshop and used a redundant CD holder to make two of them. I haven't yet tried them out in anger, but one thought that I have had is just how much swarf will be attracted to the magnets. It seems to me that perhaps a piece of thin flexibly plastic might be of use to enable easy removal of any swarf on the magnets. Possibly fastened using the same fixing screws and perhaps bent under the magnets. Ok this will cause a reduction in magnetic strength, but I offer it as an idea - I've yet to try it myself.

Peter G. Shaw, by email

Mystery Casting 1

Dear Neil,

Regarding the casting shown in Scribe a Line MEW Issue 303, I am sure that this is a keyway cutter casting.

I bought, what seems to be an identical casting from College Engineering Services many moons ago (2003). I believe that the original design was by Stan Bray and the accompanying article was published in either a very early issue of MEW or in ME. I bought the casting at the Harrogate show and College Engineering gave me a photocopy of the plan and construction details. I have spent half a day looking for the plan details which I would not have thrown away but have failed to locate it. I have also searched MEW (I have every issue) without success.

The finished keyway cutter - or slotting tool, works well and I used the tool for cutting a keyway in my beam engine flywheel.

I would suggest contacting College Engineering to see if they still have drawings.

David Haythornthwaite, by Email



Mystery Casting 2

Dear Neil, regarding the correspondence about the Slotting Tool. It was designed for the Myford 7 Series lathe, by a member of the Peterborough Society of Model Engineers, the late Peter Robinson.

The casting was obtained from College Engineering when the Company was under the original ownership. There was no mention of the casting in the May 2016 catalogue, so it may no longer be available. There is no reason why one could not be carved out of a lump of cast iron, or even fabricated.

Attached is a picture of mine. Having disposed of my ML7, it now sits on a raising block to suit a larger lathe.

Additionally, the device can be swivelled on the raising block, should a need ever arise to cut a keyway or a slot on a taper.

The cutting tool is held in an arbor clamped into the main ram, so that other tool carriers can be used to carry different sized toolbits.

The grease nipple is there to ensure lubrication, and actually seems to tighten the fit of the ram in the casting!

It may not be as cosmetically pleasing as many examples of this tool that have been made, but it does what is required.

Howard Lewis, Peterborough

Angle Grinder Accessories

Hi Neil, I just read the article about improvements for the angle grinder. You can buy a new chuck with key and sds adapter from 'toolstation', this chuck is threaded 1/2" x 20 unf, with a capacity of 13mm.

My plan is to cut the sds adapter down and weld or braze it into the new made adapter, this does away with cutting the thread for the chuck.

Hope this is helpful for those who are going to make the adapter I'm making, Going to make one for my brother as well.

Tony, by text

Araldite in the Edge Finder Series

Dear Neil, may I correct a point - Araldite is a thermosetting plastic. It sets faster, and harder, with increased heating. Once set, it does NOT and cannot "melt"! In fact, eventually it will "char". The only limit to increasing strength with use of higher setting temperatures is that it will start progressively to darken!

For those unaware of its properties, the makers CIBA used to have an advert with a photograph showing a 15 ton road tanker full of the stuff, suspended from a crane by a 1" square lap joint in a steel strip!

That is 15tons per square inch lap in sheer!

I used to rebuild broken laminated wooden squash racquets using 1mm birch 3-ply, from the "Bristol" model shop, laminating the 3-ply with Araldite, bound tightly with easily removable copper wire, and gently cooking the racket for several minutes at a fairly high temperature. The resulting "Dunlop Maxply International" racquets went on to have long and successful lives in the hands of their grateful owners! The sports shop in the country club initially tested the repairs by trying to break them by leaning a full body weight on them against a wall! If the repair wouldn't fail, they would restring the racket.

A glass or other ceramic repaired with Araldite will never break at the repair - always at some other point!

I made the mistake of mending one racquet that had a broken METAL shaft - my repaired metal shaft itself bent, so I cut it off, and used the head as a table tennis bat!

Davina Hockin, Portishead.

Making Screws

Dear Neil, I have been a reader of the M E workshop since it was first launched.

I have looked out for how to make the humble wood screw. now various companies have taken over with their horrible screws. They don't look right in an antique bit of furniture (Chippendale chairs etc.)

I know you can shop around and may find the one you want if your lucky. Then you may have to buy 25, 50 or more when you only need two or three in steel or brass.

I cannot get my head around how to make them on the lathe. I know there must be more clever engineers than myself. Would you be kind enough to run an article in our magazine?

Sid Rawlings, by email.

Can any readers help with some notes on making wood screws? - Neil.

Lantern Chuck - 1

Dear Neil, Sorry but the gremlins have got to the dimensions in the drawing, the dim for the lantern screw is not 0.750 but 0.710 to allow for 0.020 depth threads. It is an important dim because if the maker bored this to 0.750 the part would be scrap and a disappointment depending on how much work on the part had already been done. Have put it on the forum under lantern chuck but that only reaches some of the readers.

Bernard Towers, by email

Hello Bernard, when checking the drawing we interpreted it as meaning a 0.750" thread (which would be correct), rather than boring 0.710" and then screwcutting. Hopefully readers will realise the threads in body and cap have to match - Neil


Lantern Chuck - 2

Al Hanson, from Illinois sent these photos of some beautiful oil-blackened lantern chucks made to Bernard's design.



Mystery Tool Answer

It's a "lightening tool" for the bench vice to show clearly the cutting line as the light is usually coming from in front and so the line is not visible in the shadow as can be seen on the photo. Nevertheless this is also a very efficient tool for back scratching! - Jacques Maurel.

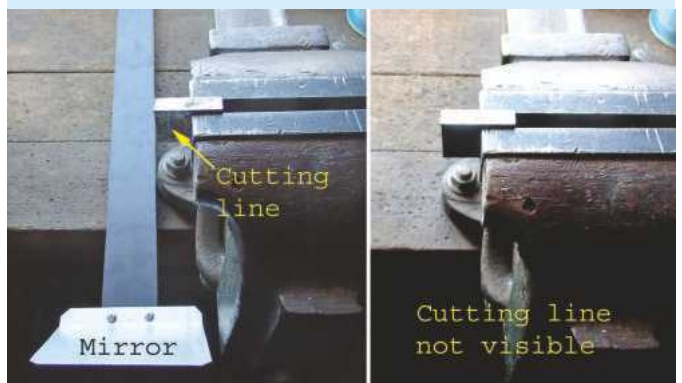

Developing an Edge Finder



Roger Vane describes how he designed and developed an electronic edge finder, together with detailed drawings so that you can make your own - Part 3



Pre-tinning the brass end cap.



Fitting the LED into the cartridge body - note the cathode wire alongside LED lens.

A small hole was drilled into a piece of vermiculite sheet in order to position the end cap, which I then 'pegged' in position with a short length of 0.8mm stainless steel wire, **photo 21**. Once in position all I had to do was apply heat using the solder gun and apply the flux-cored soft solder to coat the inside of the hole and the recess.

As the solder would stick to the wire,

I had to remove it before the solder had completely solidified. Allow to cool and then clean up, neutralising any residue as appropriate to avoid future corrosion. Any excess solder in the countersink can easily be removed using the $\frac{1}{8}$ " drill rotated by hand in a pin chuck - the idea here is to allow sufficient volume for the white metal solder whilst retaining the tinned surface.

4.4 Fit the LED into the cartridge body

The first real assembly task is to glue the LED into the cartridge body. The resistor wire will be passed through the central holes and into the battery area, and the cathode wire bent to fit into the groove in the base of the LED, again using the flat blade of a screwdriver to assist. The anode (resistor) wire will also need to be




The brass end cap is located in its holder prior to applying the JB Weld epoxy adhesive.



The acrylic tube has now been fitted onto the brass end cap.

bent slightly to fit through the $\frac{1}{16}$ " hole in the cartridge body. Try a 'dry run' to see how the wire from the LED slots into the bottom of its housing in the cartridge body - you should be able to feel it 'seat' (and putting a small alignment mark on the cartridge body also helps).


During the assembly process it advisable to use some form of alignment device. Initially I planned to use the lathe, with the cartridge body held in a collet and the LED supported using an assembly guide such as that shown in fig. 2.5 held in the tailstock chuck. This

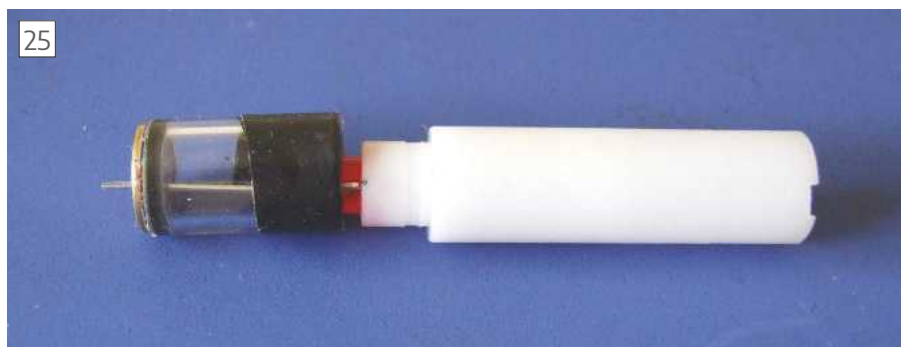

Adding the acrylic tube to the assembly - the wire has been guided through the pre-tinned hole before applying the adhesive to the spigot on the cartridge body.



Ensuring that the acrylic tube is correctly bedded down onto the cartridge body.

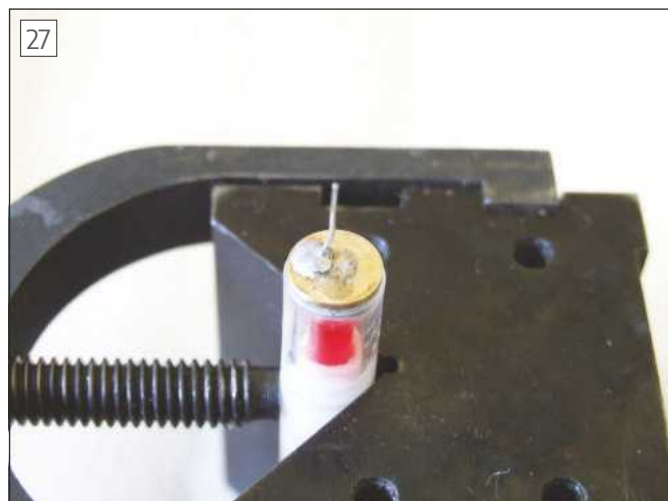

The cathode wire has now been soldered into the end cap using the low melting point solder.

would leave any surplus adhesive liable to drip due to the effects of gravity. I decided that it would be safer to use the milling machine to align the parts, with the tube vice holding the cartridge body and the assembly guide held in a drill chuck, **photo 22**. The tube vice was centred under the milling machine spindle in the same way as shown previously, in photo 12. Any surplus adhesive should flow into the $\frac{5}{32}$ " diameter hole out of harms way.

Once happy, it's time to apply the adhesive. Adhesive 'placement' is important as the adhesive needs to be contained and kept away from the LED lens, but using sufficient for a strong joint (the contact area is fairly small). I found that the best method was to apply the adhesive into the seat and then fit the LED. If applied to the LED itself there is always the risk that the adhesive will be pushed outwards as the LED is seated into the recess.

4.5 Fit the end cap into the acrylic tube

As mentioned above, I used a high temperature epoxy adhesive (JB Weld) to make this joint. This brass end cap

will become the end face of the cartridge and will be carefully machined to clean-up after assembly has been completed.

Before the adhesive is applied, I found it worthwhile to place 'masking' tape over the tube to avoid adhesive straying onto the outer surface. Initially I used traditional masking tape but found that insulation tape was easier to remove (and so it was). Just roll the tape around the acrylic tube, leaving an overlap which can then be trimmed with a scalpel - much easier and quicker than trying to correctly align the edge of the tape with the end of the tube. Fitting the end cap was straightforward - I placed the end cap in the holder, **photo 23**, and applied the adhesive into the recess and on the inner face of the flange. The acrylic tube was then placed over the flange and seated on to it **photo 24**.

Once the adhesive has fully cured (around 24 hours) the joint can be cleaned up and the tape removed.

4.6 Fit the acrylic tube onto the cartridge body

Next, the acrylic tube must be glued onto the cartridge body, which involves


threading the cathode wire through the hole in the end cap - a little bit like threading a needle, but at least the thread is rigid in our case. Before fitting though, it is worth placing a band of tape at the open end of the tube to keep adhesive off the outer surface - again I used insulation tape for this. Once the wire had been threaded through the hole, I bent to retain the tube in position, **photo 25**. The adhesive was then applied.

The tube vice in the milling machine was used (with a rod held in the drill chuck) to apply a very light pressure to maintain accurate location, with the spindle having been centralised as described above. This operation is shown in **photo 26**. Once the adhesive has dried the insulation tape can be removed and the joint cleaned up.


4.7 Soldering the cathode wire into the brass end cap

Warning: too much heat could cause the acrylic tube to distort or even melt. This may inadvertently be caused by using a solder with too high a melting point.

As mentioned above, it is advisable to pre-tin the brass end cap before joining

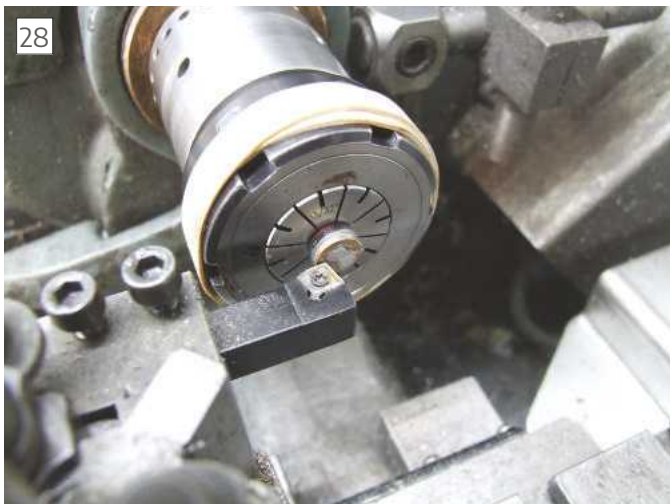

Skimming the face of the end cap to clean up.

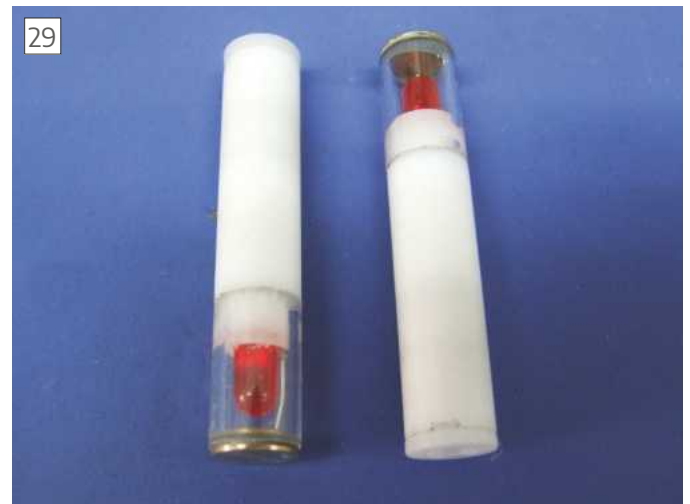

Two completed cartridges.

the cathode wire from the LED using white metal solder. For the soldering itself I used the 60W soldering iron, being rather wary of overheating the adhesive joint with the solder gun. With the tip of the soldering iron placed in the centre of the end cap I let the heat 'run' towards the wire. As soon as the white metal melted and ran into the hole, I removed the soldering iron to avoid overheating the adhesive bond and the acrylic tube. All that is now required is to trim the wire, **photo 27** shows the finished joint. By the way, should this happen simply turn the cartridge upside-down and apply heat to the end cap - the solder will flow back into the hole again. Don't ask!

4.8 Finishing the cartridge

Finally, the end cap can be carefully skimmed over to make sure that it is square to the cartridge body and therefore providing the best electrical contact to the probe. It is preferable to hold the tube in a collet, **photo 28**. Light cuts are best here to minimise any stress on the glued joint. It is important that the brass end cap protrudes slightly from the acrylic tube so that good electrical contact can be guaranteed.

The cartridge is now almost complete. We can now bend the wire into the battery case to act as a contact for the batteries. I found the wire easy to bend and manipulate into its position at the closed end of the battery case. Use a small flat-bladed screwdriver and place the wire evenly across the surface without any overlaps.

Although the process sounds simple, I found that the cartridge would not light up when tested with 'on-board' batteries - the cause was found to be a blob of hardened Araldite on the wire. Once this was removed everything



Using a plug tap to finish the 7/16" x 32 thread.

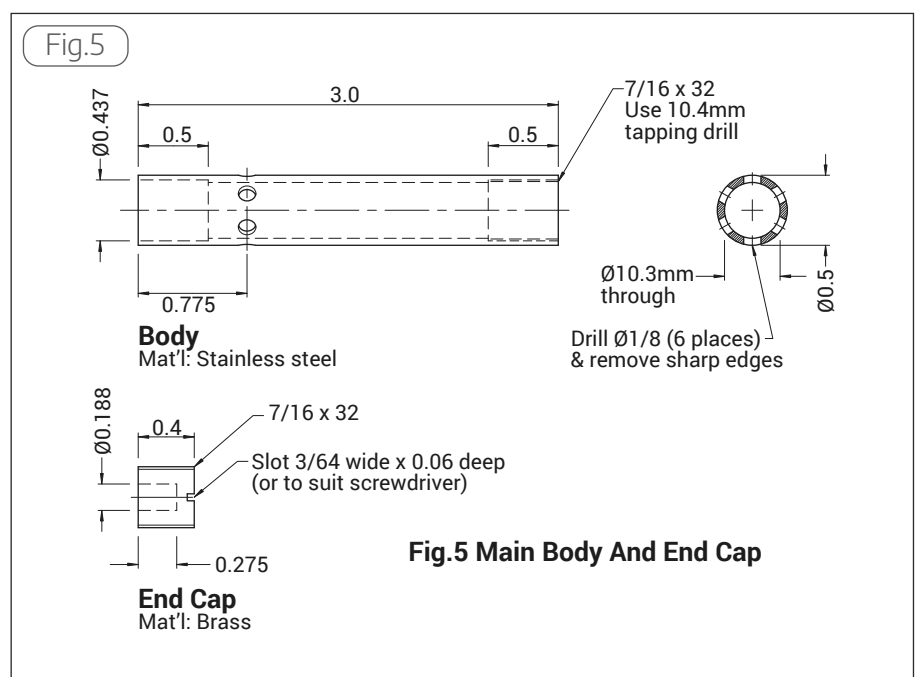


Fig.5 Main Body And End Cap



31 Setting the reamer to achieve 0.50" depth for the probe insulation sleeve.



32 Reaming the 7/16" diameter bore with a machine reamer.



33 Drilling the last of six light apertures in the body.



34 Countersinking the light apertures.

worked fine. I also found it beneficial to use an 8mm machine reamer by hand to gently remove a small amount of adhesive that was deposited on the inner wall of the battery compartment. Two completed cartridges are shown in **photo 29**.

Making the bodies

For those readers who are new to this wonderful hobby of ours, I feel that should mention that the photos which show drilling and tapping of large holes are posed. In practice a cutting compound should be used when cutting the steel parts, to both preserve the tools and make the operation easier and to the quality required.

I made the body itself made from ground stainless steel rod, simply because I had a good supply available at the time, but it could just as easily be made from standard rod or even thick walled tubing - preferably stainless. The exact diameter is unimportant here - what is required is a blank that is truly

round, particularly if the edge finder is to be held in the drill chuck, the jaws of which only touch the edge finder body in three places. I believe that it is best to avoid potential errors at source if at all possible. Details of the body are shown in the drawing **fig. 5**.

I started the job by facing both ends to achieve an overall length of 3", following which I drilled a 1/8" diameter pilot hole - drilling in from both ends which is just about the limit for a standard 1/8" jobber drill. The hole was then progressively opened up to 10.3mm diameter, initially drilling in from both ends and with the final drill to size being drilled from one end only to ensure 'through' alignment. The use of a 10.3mm drill should allow for some clearance around the cartridge, but if the fit appears to be 'tight' due to some misalignment within the cartridge assembly, then the through hole can be opened up to a maximum of 10.4mm (the tapping size for 7/16" x 32).

Next comes the task of adding the thread for the end cap. At this stage I

decided to use a collet to hold the body as any slippage when tapping could cause unwanted marks from the chuck jaws. My charts suggest tapping drills of either 10.3mm or 10.4mm diameter - I used a 10.3mm drill (13/32") on the first body, and apart from being hard work, more seriously I found that threading into such a thin wall caused the tube to spread by a couple of thou making it 'bell-ended'. This was obviously undesirable and had to be carefully rectified by polishing it down to size with a fine file. I then used a 10.4mm drill on the next body without any problems, following which the hole was tapped using a taper tap followed up with a plug tap, **photo 30**.

Once the thread has been tapped the next job is to machine the seating in the other end for the insulating sleeve. This can be reamed with a machine reamer if you have one, or even formed using a 7/16" slot drill - the exact diameter measurement is not that important as the insulating sleeve can be machined to

suit. In the event I used a $\frac{7}{16}$ " diameter machine reamer and then carefully removed the chamfer left in the end of the bore with a slot drill. I could have easily by machined an equal chamfer on the insulating sleeve but felt that such an operation would reduce its strength as it has to be a press fit in the body.

Depth is important here, although the insulating sleeve is initially machined 'slightly long' to allow for trimming after assembly so that any minor deviations can be accommodated.

Photograph 31 shows how I set the reamer to achieve 0.50" depth for the probe insulation sleeve. I used a rule as a feeler gauge and trapped it between the work and the end of the reamer. The rule was 0.030" thick, so once the rule had been removed, I needed to move the reamer 0.530" into the work to achieve the desired depth. Although not strictly necessary this setting step ensures that some material remains for the slot drill to remove. If you have a tailstock micrometer or digital device, then this task becomes much easier.

Photograph 32 shows the reaming operation in progress.

The same procedure was then used to set a $\frac{7}{16}$ " diameter slot drill to remove the corner at the bottom of the bore whilst aiming to achieve a depth of 0.500".

The final task was to drill the six light apertures in the body, where care was required due to the wall thickness, or lack of it. It is all too easy when centre drilling to go in too deep and produce a hole that is too large, ruining the job, so I would recommend that a quill stop is used if you have one on your mill. Apart from that, it is a simple job using an indexing or dividing head. **Photograph 33** shows the final $\frac{1}{8}$ " diameter hole being drilled in the body, where centre



Cutting the screwdriver slot in the end cap.

drilling has already taken place.

Before removing the body from the indexing head I used a small 90 degree countersink bit to break the edge of the holes, **photo 34**. The comment regarding the depth stop also applies to this operation, and in my case a depth of around five thou was needed to chamfer the hole out to the complete diameter.

Finally, I ran the 10.3mm drill through the body again to remove the small burrs created during the drilling and tapping operations. It is important to deburr the bore carefully to avoid scratching the acrylic tube. At this stage it is also advisable to check the fit of the cartridge, just in case the bore needs to be opened up a little more.

That completes work on the body, which can now be put aside to await fitting the probe.

End cap and contact spring

The end cap for the body is shown on the same drawing as the body, (fig. 5), and is the same for both styles of edge finder. I made this from $\frac{7}{16}$ " diameter brass rod rather than stainless as it was going to be easier to machine.

The first operation was to face the bar and then thread $\frac{7}{16}$ " x 26tpi for a length of around $\frac{1}{2}$ " to full depth. Once this had been done, I machined the screwdriver slot in the end using a slitting saw. The dimensions for this will depend on your screwdriver, but I found that a $\frac{3}{64}$ " slitting saw did the job nicely and I cut the slot to a depth of around 0.06".

Photograph 35 shows the slotting operation - the bar is conveniently held in the indexing head collet.

Next it was back to the lathe for parting off, but before completing the



Forming the recess in the end cap, using the body as a holder.



The end caps and contact springs, together with a cartridge

Fig.6

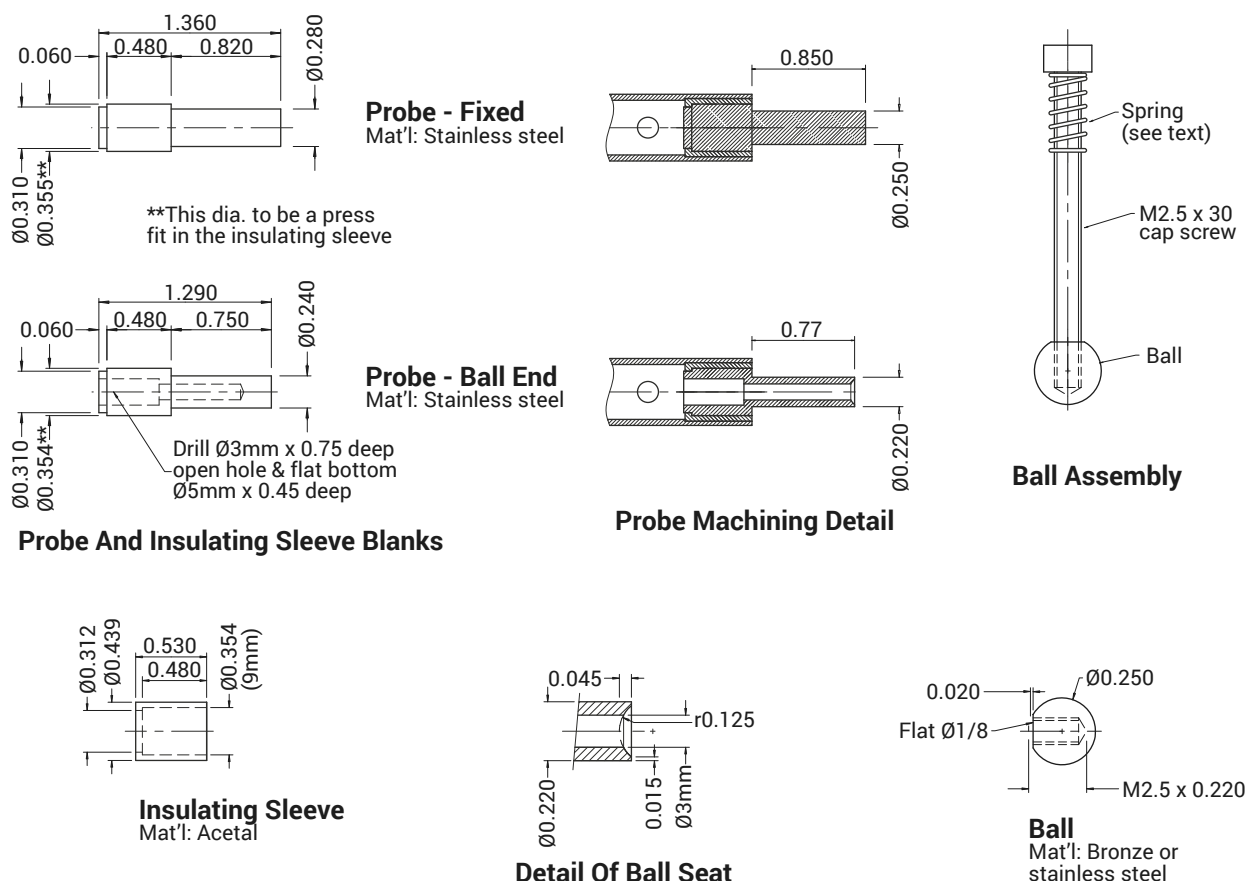


Fig.6 Probes

cut I took the opportunity to chamfer the thread and run the die down it again just to remove any burrs.

All that is now required is to form the spring pocket with drills and a slot drill to finish. So, how to hold the end cap to machine this? The body can be used as a holder if you have a backstop which is small enough in diameter to pass through the body itself, as can be seen in **photo 36**. If such a backstop is not available, then a simple split or threaded bush should do the job.

The contact spring was cut from a length of $\frac{3}{16}$ " x 23swg stainless steel spring supplied by Polly Models (usual disclaimer) - a length of around $\frac{3}{4}$ " has proved to be satisfactory. Flatten both ends and the open up one end slightly so that it grips the inside of the brass cap.

Photograph 37 shows the contact spring fitted into one of the end caps, together with another showing it's relationship to the cartridge.

Now that the bodies have been completed, we can turn our attention to making and fitting the probes and their insulating sleeves.

The insulating sleeves and probe blanks

As the machining and fitting operations of the insulating sleeves and the probes are somewhat intertwined, I have described them together. Details and dimensions are shown on the drawing **fig. 6**.

The insulating sleeve is the same for both styles of edge finder, but the probe blanks and their final machining process are different.

The first job is to prepare the insulating sleeve blanks. I made these from 12mm diameter black acetal, and after cutting-off and facing to an overall length of 0.55" the next stage is to prepare the bores as these will be used as a gauge when machining the probe blanks.

The small $\frac{5}{16}$ " bore is finished with a $\frac{5}{16}$ " diameter slot drill, while the larger of the bores at 0.354" diameter, more correctly 9mm, is formed with a 9mm slot drill - all fairly easy when machining acetal.

We can now move forward to preparing the probe blanks, where

the major diameter is machined to suit the bore of insulating sleeve with an interference fit of around 0.001" - the insulating sleeves can be used to gauge the fit.

The probe length can be varied to suit individual requirements regarding access, etc, and with the ball-ended version if the probe is shortened then the screw will also need to be shortened by the same amount. The probe and insulating sleeve are left 'long' by around 0.030" to allow for machining tolerances and final fitting and machining - this has been allowed for on **fig. 6**.

●To be continued

FREE PRIVATE ADVERTS

MODEL ENGINEER **MODEL ENGINEERS' WORKSHOP**

Did You Know? You can now place your classified ads by email. Just send the text of your ad, maximum 35 words, to neil.wyatt@mytimemedia.com, together with your full name and address, a landline telephone number, whether it's a for sale or wanted and stating that you accept the terms and conditions for placing classified ads – see below. Please note, we do not publish full addresses to protect your security.

Coronavirus advice is changing!

Please follow local government advice in Wales, Ireland, Scotland or England as appropriate, especially if you are considering buying or selling items for collection. Please respect the needs of delivery drivers to protect their own safety and, if receiving a parcel take sensible precautions when handling anything packaged by someone else.

Machines and Tools Offered

■ Harrison lathe, L5, 9" swing, 24 B.C. Norton gear box. With DRO. £1,100.
T. 01775 820469. Spalding.

■ Myford capstan lathe on wheeled trolley with collets and cut off slide. £200. **T. 01298 687448. Buxton.**

■ Myford Super 7B on Myford stand, gearbox, fully tooled, metric conversion set, inverter drive, excellent condition £2,750. Myford Speed 10, Myford stand, one owner, tooling, pristine, books and manuals, for both £950.
T. 07724857140. Colwyn Bay.

■ Little used. Warco wm180 lathe + d.r.o. F+t steadies. faceplate, 4x chucks, tailstock chuck, live centre boxed set, q-change toolpost + tools, Keats block. £1000. O.v.n.o buyer to collect.
T. 07948 515105. Worthing, Sussex.

■ Elliott UO Horizontal Mill, single phase, with dividing head, vice, and Bridgeport vertical head on 'swing-over' mounting, fitted inverter drive for variable and reversible speed - £650-
T. 01494 864978. Great Missenden.

■ Myford Super 7, stand, raising blocks, screw cutting gearbox, MDRO, chucks, faceplates, Dickson toolpost, capstan type tailstock, other accessories, will deliver 150 miles of Reading.
T. 01189 842512. Reading.

Models

■ 3 1/2" and 5" gauge Portable Elevated Steel Track for sale. 165 feet long, 17" high. Complete with two Bogie Passenger cars. £600.
T. 07958 250533. South London.


Parts and Materials

■ Virginia 3.5" chassis. Wheels, cylinders, bogie machined. Plans. Tube for boiler. Tender bolster castings. £50.
T. 01444 451175. Haywards Heath.

Magazines, Books and Plans

■ Model Engineer Vol. 138-140, 158-174, 186-188, 193-204, 211-225, not all complete. Also some Model Engineers' Workshop and Locomotives Large and Small. Offers.
T 01582 883260. Luton/Bedford.

■ A quantity (ca.6 Kg/ 13 lb) of mint condition ex-dealer illustrated sale

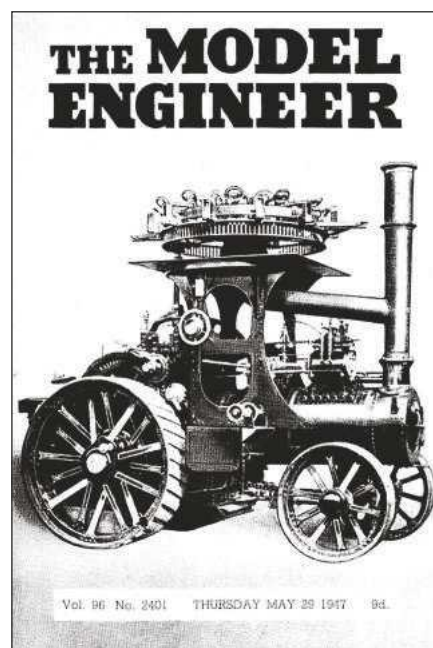

leaflets/distributor information/ accessories data etc for a wide range of machine tools mainly 1980 - 1990. Includes 600 group, Q&S, Binns and Berry, Boxford, Ajax, Denbigh, FANUC, Alzmetal, Abwood, Danobat, Aerogrip, Warrior etc.
T. 01205 290312. Near Boston, Lincs.

Wanted

■ Bench mounted milling machine, anything considered.
T. 01530 460573. Coalville.

■ Cowells ME lathe, must be reasonably new. Also accessories, chuck etc. Delivery by taxi if required. P.S. too old to buy a new one.
T. 01986 835776. Norwich/Ipswich.



MODEL ENGINEERS' WORKSHOP CLASSIFIED

Wishing to sell your Lathe, Mill or Complete Workshop?

Full clearances carefully undertaken

Speak to:

Malcolm Bason of MB Tools
01993 882102

Re-homing workshop machinery for 20 years!

Complete home Workshops Purchased

Essex/Nottinghamshire locations
Distance no object!

Tel: **Mike Bidwell**

01245 222743

m: **07801 343850**
bidwells1@btconnect.com

ALWAYS IN STOCK:

Huge range of miniature fixings, including our socket servo screws.

ModelFixings.co.uk

also the home of **ModelBearings.co.uk**

- Taps, Dies & Drills • Adhesives
- Engine & Miniature bearings • Circlips, etc. etc.

Tel/Fax +44 (0)115 854 8791 Email: info@modelfixings.com

BA SCREWS IN BRASS, STEEL AND STAINLESS

SOCKET SCREWS IN STEEL AND STAINLESS • DRILLS • RIVETS • TAPS • DIES • END MILLS SLOT DRILLS etc

Phone or email
lostignition8@gmail.com
for free list

ITEMS MAIL ORDER LTD

Mayfield, Marsh Lane, Saundby
Retford, Notts. DN22 9ES

Tel/Fax 01427 848880
www.itemsmallorderascraws.com

LASER CUTTING

CNC Folding and Machining Fabrication and Welding

All Locomotive & Traction Engine parts.
Your drawings, E-files & Sketches.

m: **0754 200 1823** • t: **01423 734899**
(answer phone)

e: stephen@laserframes.co.uk

Well Cottage, Church Hill, North Rington, LEEDS LS17 0DF

www.laserframes.co.uk

www.model-engineer.co.uk

To advertise here please email

angela.price@mytimemedia.com

GB BOILERS

COPPER BOILERS FOR LOCOMOTIVES AND TRACTION ENGINES etc.

MADE TO ORDER

Constructed to latest standards. UK CA stamped.

Over 20 years experience

Enquiries, Prices and Delivery to:

Telephone: **Coventry 02476 733461**

Mobile: **07817 269164** • Email: gb.boilers@outlook.com

CLOCKMAKING METALS AND BOOKS

CZ120 Compo Brass Sheet/Blanks, CZ121 Brass Bar
CZ126 Brass Tube, EN8 & Mild Steel, Std Silver Steel

Gauge Plate: Suspension Spring Steel
Wheel & Pinion Cutting, Horological Engineering

BRASS PRICES REDUCED

Send Two 1ST Class Stamps For Price List

I.T.COBB, 8 POPLAR AVENUE,

BIRSTALL, LEICESTER, LE4 3DU

TEL 0116 2676063 Email: ian@iantcobb.co.uk

www.iantcobb.co.uk

Meccano Spares

New Reproduction and
Pre-owned Original
Meccano Parts.

www.meccanospares.com

sales@meccanospares.com

Tel: 01299 660 097

To advertise here please email
angela.price@mytimemedia.com

M-MACHINE

Unit 6 Forge Way, Cleveland Trading Estate
Darlington, Co. Durham. DL1 2PJ

Metals for Model Makers

Contact us for Copper, Brass, Aluminium,
Steel, Phosphor Bronze, etc.

PHONE & FAX 01325 381300

e-mail: sales@m-machine.co.uk
www.m-machine-metals.co.uk

TAPS & DIES

Excellent Quality manufactured-supplied



British-box HQS taps dies cuts stainless
ME5(33pcs) **ME4** (30pcs) **BA3**(35pcs) has
all Model Eng 32+40tpi BA, BSB, MTP etc

THE TAP & DIE CO

445 West Green Rd, London N15 3PL

Tel: 020 8888 1865 Fax: 020 8888 4613

www.tapdie.com & www.tap-die.com

Cowells Small Machine Tool Ltd.

Cowells Small Machine Tools Ltd.
Tending Road, Little Belfrey, Colchester CO7 5SH Essex England
Tel/Fax +44 (0)1206 231 792 e-mail: sales@cowells.com

www.cowells.com

Manufactures of high precision screwcutting lathes,
8mm horological collet lathes and
milling machines, plus comprehensive accessory range.
Talk directly to the manufacturer



webuyananyworkshop.com

Re-homing model engineers' workshops across the UK



It's never easy selling a workshop that has
been carefully established over a lifetime. I
will buy your workshop so you don't have to
worry about finding a new home for much
loved workshop equipment and tools.



Please email photos to

andrew@webuyananyworkshop.com

Or to discuss selling your workshop, please
call me on **07918 145419**

All equipment considered: Myford, Warco, Chester, classic British brands etc
Polly steam locomotives also purchased, especially those needing a bit of 'TLC'

DREW EATTS INVITING ENTRIES THE TRANSPORT SALE

EST. 1759

21 SEPTEMBER 2021



A fine exhibition and award winning model of a First World War Railway Gun, built by Mr. D Swan of West Lothian, Scotland between 2006 and 2010
Sold £ 5,000

An exhibition standard, bronze medal winning model of a 2 inch scale Fowler A7 agricultural traction engine
Sold £15,000



AUCTION LOCATION

Dreweatts
Donnington Priory
Newbury
Berkshire RG14 2JE

ENQUIRIES

Michael Matthews
+44 (0) 7858 363064
mmatthews@dreweatts.com
dreweatts.com

Catalogue and free online bidding at: dreweatts.com



MODEL MAKING METALS

1/32in. to 12in. dia. bright steel, stainless steel, bronze, spring steel, brass, aluminium, silver steel, steel tubes, bolts, nuts & screws, tap dies + drills, white metal casting alloys.

Fine materials, chain, plastic.

Lathe milling machines and equipment, new and secondhand.

Mail order nationwide and worldwide callers

Mon.-Fri. 9 - 5pm. *All cards welcome.*

Send now for a **FREE** catalogue or phone

**Milton Keynes Metals, Dept. ME,
Ridge Hill Farm, Little Horwood Road, Nash,
Milton Keynes MK17 0EH.**

Tel: (01296) 713631 Fax: (01296) 713032

www.mkmetals.co.uk

email: sales@mkmetals.co.uk

MODEL ENGINEER

BECOME PART OF
THE ONLINE
COMMUNITY FOR
MODEL ENGINEER MAGAZINE



- Get access to exclusive competitions and giveaways
- Exclusive articles and advice from professionals
- Join our forum and make your views count
- Sign up to receive our monthly newsletter
- Subscribe and get additional content including Online Archives dating back to 2001*
- Register for free today and join our friendly community!

WWW.MODEL-ENGINEER.CO.UK

* only available with digital or print + digital subscriptions

FOLLOW US
f t

Free Principles eTextbooks

Hundreds of pages of full-colour images with descriptive text and calculations. Extensive Tables of Contents with Next and Previous page navigation.



• **Electronics**



• **Computing**



• **Mathematics**



• **Mechanics**



• **Accounting**

• **www.eptsoft.com**



25% OFF Deposit

We have missed the exhibitions just as much as our customers. We do not want anyone to miss out on the exciting offers we had planned, therefore we are offering 25% off the deposit of any of our Polly loco Kits throughout the month of May 2021. Get started from as little as £855.



Build your new 5" gauge coal fired 'POLLY Loco'.
Buy with confidence from an established British
Manufacturer

Supplied fully machined, assembly requires hand tools only – no riveting, soldering or other complex processes. Kit includes boiler CE certified and accepted under Australian AMBSC regulations.
Model is supplied as a succession of kit modules.

11 models to choose from, tank engines, tender engines, standard gauge/narrow gauge – something for everyone! Prices from £5716 including VAT and UK carriage. Build & cost is spread over 12 months.

144 page Catalogue £2.50 UK £8 international posted (or download free!) and enquire for further details or visit our website where you will find other Polly Locos, Kits, drawings and castings for scale models and comprehensive ME Supplies.



Polly Model Engineering Limited
Atlas Mills, Birchwood Avenue,
Long Eaton, Nottingham,
NG10 3ND, United Kingdom

www.pollymodelengineering.co.uk

Tel: +44 115 9736700

email: sales@pollymodelengineering.co.uk

HOME AND WORKSHOP MACHINERY

144 Maidstone Road, Fools Cray, Sidcup, Kent, DA14 5HS
 tel: 0208 300 9070 - evenings 01959 532199
 website: www.homeandworkshop.co.uk
 email: sales@homeandworkshop.co.uk
 stay safe! taking orders;
 visit our eBay store at: homeandworkshopmachinery



RotoCamm MDX-40A CNC Router
£2000



Modelmark M/M press £225



Boxford 260 VMC mill less software
£1495



Drummond lathe £325



Ajax UP Universal
Mill £1750



Boxford AUD MK11 lathe,
gearbox, PCF £1825



Meddings Driltru pedestal drills
1/2" & 1MT models £295 each



Neat cut and soluble
cutting oils £10 each



Large Vee Blocks 12" bar
£425



Check out our eBay store to
view our large amount of stock!



Stanier precision vice 55mm
jaw New / New Zealand £195



Myford Super 7, ML7R, ML7
MI10 Speed 10 Change
wheels Genuine £10 - £37




MEDDINGS
MB4 £645



Bridgeport milling machine
42" x 9" (metric) £3750



Center 2A V/H mill
quill head +
height block £1950



Brookes, Quorn, Stent
tool and cutter grinders
£950 each



MYFORD SUPER 7B PCF £3250



Harrison Graduate wood lathe
240V £1375



Morgan Rushworth BP50 / 16
50" x 18G box and pan folder £1750
Complete with fingers



DP / MOD gear cutters
£20 each,
please enquire for availability.



Smart and Brown Model L
second operation lathe £750



Sedgwick 10" planer / thicknesser
Nice example £750



MYFORD SUPER 7B 3 1/2" x 31",
gearbox, clutch, power cross feed
£3750



Denbigh No 6 Fly press £345



COLCHESTER STUDENT ROUND
HEAD Hydraulic copying attach-
ment and TRUGRIP collet chuck
£2950



Baltec Type 5 arbor press, 90mm
throat / three off available £200



MYFORD SUPER 7B 3 1/2" x 31",
gearbox, clutch, power cross feed
£3250



Rolls 48" x 3" 16g (slip roll)
£1400



Edgwick centre lathe 7 1/2" x 44"
240 volts £1400



Colchester Mascot VS2000
fixed steady £575



Tripos 240v
switch £90
Myford rifle / bridge
felts 5 for just £20



Union centres 7.5" x 24" £425



Pipe centre 4MT 4-8"
£245



Keetona Box-Form 100"
14g box and pan folder
£2950

Please phone 0208 300 9070 to check availability.
 Distance no problem – Definitely worth a visit – prices exclusive of VAT
 Just a small selection of our current stock photographed!

Worldwide
Shipping

POWERED BY
barclaycard

